

ignition

Stagepix Line 100 IP
Stagepix Line 50 IP

LED strip

Musikhaus Thomann
Thomann GmbH
Hans-Thomann-Straße 1
96138 Burgebrach
Germany
Telephone: +49 (0) 9546 9223-0
E-mail: info@thomann.de
Internet: www.thomann.de

13.11.2020, ID: 486339, 486342

Table of contents

1	General information	5
	1.1 Further information.....	6
	1.2 Notational conventions.....	7
	1.3 Symbols and signal words.....	7
2	Safety instructions	10
3	Features	13
4	Installation and starting up	15
5	Connections and controls	18
6	Technical specifications	21
7	Cleaning	24
8	Protecting the environment	25



1 General information

This user manual contains important information on the safe operation of the device. Read and follow all safety notes and all instructions. Save this manual for future reference. Make sure that it is available to all persons using this device. If you sell the device to another user, be sure that they also receive this manual.

Our products and user manuals are subject to a process of continuous development. We therefore reserve the right to make changes without notice. Please refer to the latest version of the user manual which is ready for download under www.thomann.de.

1.1 Further information

On our website (www.thomann.de) you will find lots of further information and details on the following points:

Download	This manual is also available as PDF file for you to download.
Keyword search	Use the search function in the electronic version to find the topics of interest for you quickly.
Online guides	Our online guides provide detailed information on technical basics and terms.
Personal consultation	For personal consultation please contact our technical hotline.
Service	If you have any problems with the device the customer service will gladly assist you.

1.2 Notational conventions

This manual uses the following notational conventions:



Letterings


The letterings for connectors and controls are marked by square brackets and italics.

Examples: *[VOLUME]* control, *[Mono]* button.

1.3 Symbols and signal words

In this section you will find an overview of the meaning of symbols and signal words that are used in this manual.

Signal word	Meaning
DANGER!	This combination of symbol and signal word indicates an immediate dangerous situation that will result in death or serious injury if it is not avoided.
WARNING!	This combination of symbol and signal word indicates a possible dangerous situation that can result in death or serious injury if it is not avoided.
NOTICE!	This combination of symbol and signal word indicates a possible dangerous situation that can result in material and environmental damage if it is not avoided.
Warning signs	Type of danger
	Warning – high-voltage.
	Warning – suspended load.

Warning signs	Type of danger
	Warning – danger zone.

2 Safety instructions

Intended use

This device is intended for use as a lighting effect in connection with a Stagepix Brain IP (item no. 486345). Use the device only as described in this user manual. Any other use or use under other operating conditions is considered to be improper and may result in personal injury or property damage. No liability will be assumed for damages resulting from improper use.

This device may be used only by persons with sufficient physical, sensorial, and intellectual abilities and having corresponding knowledge and experience. Other persons may use this device only if they are supervised or instructed by a person who is responsible for their safety.

Extend the operating life of the device by regular breaks and by avoiding frequent switching on and off. The device is not suitable for continuous operation.

Safety**DANGER!****Danger for children**

Ensure that plastic bags, packaging, etc. are disposed of properly and are not within reach of babies and young children. Choking hazard!

Ensure that children do not detach any small parts (e.g. knobs or the like) from the unit. They could swallow the pieces and choke!

Never let children unattended use electrical devices.

**DANGER!****Electric shock caused by high voltages inside**

Within the device there are areas where high voltages may be present. Never remove any covers.

There are no user-serviceable parts inside.

Do not use the device if covers, protectors or optical components are missing or damaged.



NOTICE!

Risk of fire

Do not block areas of ventilation. Do not install the device near any direct heat source. Keep the device away from naked flames.



NOTICE!

Compatible devices

The device may only be used with Ignition Stagepix Brain IP (item no. 486345).

3 Features

- **Stagepix Line 100 IP (item no. 486339):** LED line light with 80 SMD LEDs (RGB) in 40 segments
- **Stagepix Line 50 IP (item no. 486342):** LED line light with 40 SMD LEDs (RGB) in 20 segments
- Control via Stagepix Brain IP (item no. 486345), not included.
- Flexibility due to interchangeable light diffusers
- Connection of several LED strips with a clamping mechanism
- Robust aluminium housing
- Including black frosted cover
- Also ideal for outdoor events due to IP65

For technological reasons, the light output of LEDs decreases over their lifetime. This effect increases with higher operating temperature. You can extend the service life of the illuminants by providing adequate ventilation and operating the LEDs with the lowest possible brightness.

Information about protection class IP65

Equipment with protection class IP65 are dust-tight and completely protected against contact (first code number). They are also protected against splash water from any angle (second code digit). That is why this equipment can also be used outdoors. Event technology equipment is generally only designed for temporary use however (event lighting) and not for permanent use outdoors.

The specified protection class does not make a statement about the weather resistance of the equipment (resistance to changing ambient conditions as well as against the effects of sunlight and UV rays).

The seals and screw connections of the equipment must be checked regularly to ensure a fault-free operation. In cases of doubt, consult a specialist workshop in due time.

4 Installation and starting up

Unpack and check carefully there is no transportation damage before using the unit. Keep the equipment packaging. To fully protect the product against vibration, dust and moisture during transportation or storage use the original packaging or your own packaging material suitable for transport or storage, respectively.



WARNING!

Risk of injury caused by falling objects

Make sure that the installation complies with the standards and rules that apply in your country. Always secure the device with a secondary safety attachment, such as a safety cable or a safety chain.



NOTICE!

Risk of overheating

The distance between light output and the illuminated surface must be more than 1.5 m (19.7in).

Provide sufficient ventilation.

The ambient temperature must always be below 40 °C (104 °F).

Mounting options

You can install the unit in hanging position. When in use, the device must always be attached to a solid surface or an approved truss. Use the designated mounts for omega brackets on the retaining bracket for fastening.

Always work from a stable platform whenever installing, moving or servicing the unit. In doing so, the area underneath the unit must be cordoned off.

Cable connections

Create all connections while the device is off. Use the shortest possible high-quality cables for all connections. Take care when running the cables to prevent tripping hazards.


Connect the device via a suitable RJ45 data cable (Cat) to the Stagepix Brain IP (item no. 486345). A maximum of four Ignition Stagepix Line 100 IP LED strips (item no. 486339) or a maximum of eight Ignition Stagepix Line 50 IP LED strips (item no. 486342) may be connected in series to each serial interface of the controller.




Please note that this device must not be connected to a dimmer.

5 Connections and controls

Stagepix Line 100 IP (Item no. 486339)

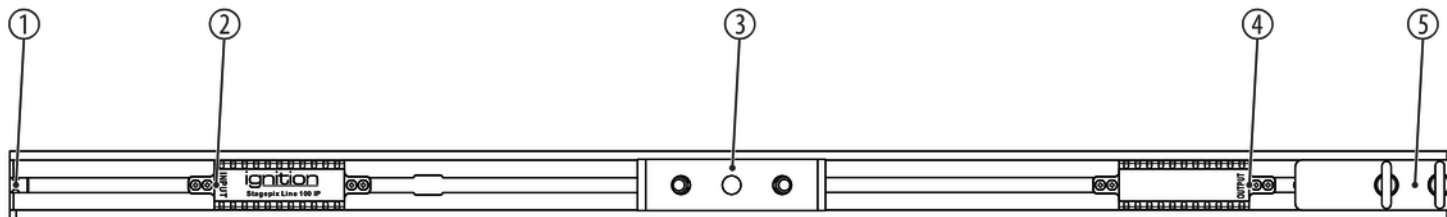

Stagepix Line 50 IP
(Item no. 486342)

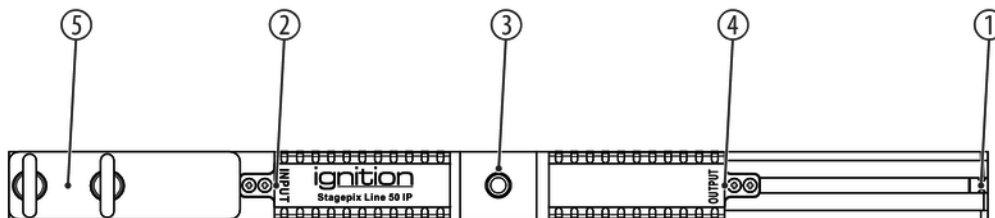

1	Fastening element for the mechanical connection of two pixel rails using a clamping mechanism
2	<i>[INPUT]</i> RJ45 input for power supply and control of the device by means of Stagepix Brain IP (item no. 486345)
3	Retaining bracket for attaching the device to a suitable truss bar
4	<i>[OUTPUT]</i> RJ45 output for power supply and control of the following pixel strip
5	Safety eyelets and connector for seamless connection of multiple bars

6 Technical specifications

Light source	Stagepix Line 100 IP: 80 × 5050 SMD, RGB Stagepix Line 50 IP: 40 × 5050 SMD, RGB	
Optical properties	Beam angle	120°
	Pixel pitch	25 mm
	Luminance	1050 Nit
	Refresh rate	3000 Hz
Control	Via Stagepix Brain IP (item no. 486345)	
Input connections	Voltage supply	RJ45
	Control via Stagepix Brain IP	RJ45
Output connections	Voltage supply	RJ45
	Control of further LED strips	RJ45
Protection class	IP65	

Technical specifications

Mounting options	Hanging	
Dimensions (W × H × D)	Stagepix Line 100 IP: 101 mm × 85 mm × 36 mm Stagepix Line 50 IP: 51 mm × 85 mm × 36 mm	
Weight	Stagepix Line 100 IP: 1.9 kg Stagepix Line 50 IP: 1.0 kg	
Ambient conditions	Temperature range	0 °C...35 °C
	Relative humidity	50 %, non-condensing

Further information

Outdoor-ready	Yes
Colour mixture	RGB
LEDs individually controllable	Yes
LED type	Xin1
Fanless	Yes
Remote control	Not possible
Wireless DMX	No
Housing colour	black

7 Cleaning

Device components

Clean the device components that are accessible from the outside regularly. The cleaning frequency depends on the operating environment: damp, smoky or particularly dirty environments can cause greater accumulation of dirt on the device components.

- Clean with a dry soft cloth.
- Stubborn dirt can be removed with a slightly dampened cloth.
- Never use solvents or alcohol for cleaning.

8 Protecting the environment

Disposal of the packaging material



For the transport and protective packaging, environmentally friendly materials have been chosen that can be supplied to normal recycling.

Ensure that plastic bags, packaging, etc. are properly disposed of.

Do not just dispose of these materials with your normal household waste, but make sure that they are collected for recycling. Please follow the notes and markings on the packaging.

Disposal of your old device



This product is subject to the European Waste Electrical and Electronic Equipment Directive (WEEE) in its currently valid version. Do not dispose with your normal household waste.

Dispose of this device through an approved waste disposal firm or through your local waste facility. When discarding the device, comply with the rules and regulations that apply in your country. If in doubt, consult your local waste disposal facility.

