

286s Mic Preamp

Channel Strip Processor

dbx
by HARMAN



Product Overview

The dbx® 286s is a full featured Channel Strip Processor that delivers a studio quality microphone/instrument preamplifier and four processors that can be used independently or in any combination. Why mic up vocals and instruments through a noisy, blurry mixer? The sonically pristine dbx 286s Mic Preamp has all the features you need, including wide-ranging input gain control, switchable +48V phantom power, and an 80Hz high-pass filter to remove low frequency hum, rumble or wind. Use the patented dbx OverEasy® compressor to transparently smooth out uneven acoustic tracks or deliver that classic “in your face” vocal performance that only a dbx compressor can. Eliminate vocal sibilance and high frequency distortion from instruments such as cymbals with the frequency tunable De-Esser. Fine-tune the Enhancer HF Detail control to add sparkle and crispness to your tracks and make adjustments to the LF Detail control to add fullness and depth to vocals and bass instruments while cleaning up the muddy low midrange frequencies. And, the separate threshold and ratio controls on the Expander/Gate allow you to subtly reduce headphone leakage or radically gate noisy guitar amps.

The dbx 286s offers a full compliment of metering and status LEDs to visually guide you to achieving the right sound. The floating balanced XLR Mic Input accepts balanced or unbalanced inputs to easily connect to professional and home studio microphones. The additional 1/4" TRS Line Input can accept balanced/unbalanced signals to process live electronic instruments or pre-recorded tracks at mixdown. Use the Insert jack to interface between the Mic Preamp and the signal processing sections to “loop out” to external processors (such as EQ or delay unit) or to mix the Mic Preamp’s signal out to an external destination.

The cost and hassle of patching together multiple processors for use on one track can be frustrating. The dbx 286s provides you with all the mic processing you need in one box, with the shortest, cleanest signal path to keep your music sounding its best!

Features

- ▶ Studio quality Mic Preamp/Channel Strip Processor
- ▶ Classic dbx Compression puts great sound within easy reach
- ▶ Frequency tunable De-Esser reduces sibilance and high frequency distortion
- ▶ Enhancer increases the detail and definition of the high and low frequencies
- ▶ Program adaptive Expander/Gate
- ▶ Insert jack allows you to add an external processor
- ▶ Full compliment of meters and status LEDs
- ▶ +48V Phantom Power
- ▶ Precision detented controls

dbx Professional
Products

8760 S. Sandy Pkwy.
Sandy, Utah 84070

801.568.7660 PHONE
801.568.7662 FAX



801.568.7583 INT'L FAX
customer@dbxpro.com

www.dbxpro.com



286s Mic Preamp

Channel Strip Processor

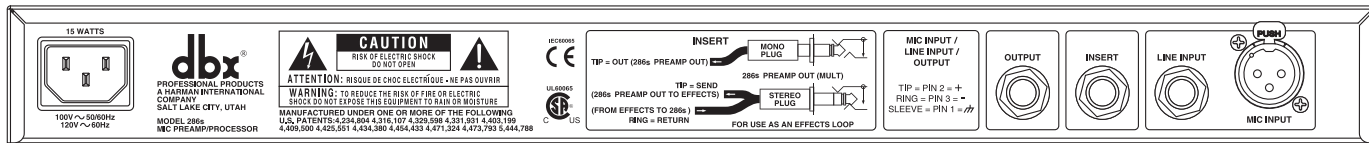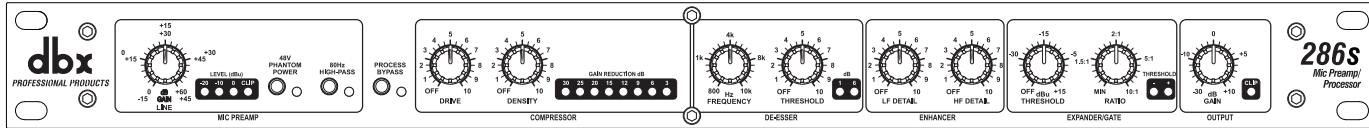

Specifications

<p>MIC INPUT:</p> <p>Impedance ~ 4.2kΩ Balanced</p> <p>Maximum Level 0.25Vrms, Gain = 30dB</p> <p>Gain Adjustment Range +0dB to 60dB</p> <p>Phantom Power +48VDC, applied to XLR pins 2 and 3 through 6.81kΩ resistors</p> <p>CMRR >40dB, typically 55dB</p> <p>EIN -125dBu, 22Hz-22kHz, 150Ω source impedance</p> <p>LINE INPUT:</p> <p>Impedance 10kΩ unbalanced, 20kΩ balanced</p> <p>Maximum Level >+21dBu, balanced or unbalanced</p> <p>Gain Adjustment Range -15dB to +45dB</p> <p>CMRR >40dB, typically 55dB</p> <p>INSERT (1/4" TRS):</p> <p>Normal: tip is Send, ring is Return</p> <p>Ring: Impedance >5kΩ</p> <p>Maximum Level >+21dBu</p> <p>Tip: Impedance 100Ω</p> <p>Maximum Level >+21dBu, >+20dBm (600Ω load)</p> <p>Noise <-89dBu, unweighted (20Hz-20kHz);</p> <p>Distortion <0.01% THD, 20Hz-20kHz, +10dBu</p> <p>LINE OUTPUT (1/4" TRS):</p> <p>Balanced/Unbalanced</p> <p>Impedance 100Ω unbalanced, 200Ω balanced</p> <p>Maximum Level >+21dBu, >+20dBm (600Ω load)</p> <p>Gain Adjustment Range -30dB to +10dB</p> <p>Noise <-85dBu unweighted (20Hz-20kHz); Both Gain Controls set for 0dB, all processing controls OFF</p> <p>Frequency Response 20Hz - 20kHz, +0.5/-0.5dB</p> <p>Distortion <0.08%THD, 20Hz-20kHz, +10dBu, all Processing Controls OFF</p> <p>COMPRESSOR:</p> <p>Threshold Range -40dBu to +20dBu</p> <p>Threshold Characteristics OverEasy®</p> <p>Compression Ratio >4:1 For input levels beyond 20dB above threshold</p> <p>Maximum Compression 30dB</p>	<p>Attack Time Program-Dependent; >1s for small level increases, down to 10ms for large increases</p> <p>Release Time Program-Dependent; adjustable between approximately 1dB/Sec and 75dB/Sec</p> <p>Distortion Typically <0.05%THD, 20Hz-20kHz, 15dB G/R, +10dBu Output, DENSITY @ 0</p> <p>SMPT E Intermodulation Distortion <0.05%; 60Hz/7kHz 4:1, 15dB G/R, +10dBu Output Level, DENSITY @ 0</p> <p>DE-ESSER:</p> <p>Characteristic Wideband Gain Reduction</p> <p>Frequency Range 800Hz to 10kHz High Pass, 12dB/octave</p> <p>Release Time Program-Dependent approximately 1ms/dB</p> <p>ENHANCER:</p> <p>HF Detail Characteristic Program-controlled shelving equalizer, approximately 15dB maximum HF boost</p> <p>LF detail Characteristic Bell-shaped boost @ 80Hz, bell-shaped cut @ 250Hz, ratio is approximately 2:1</p> <p>EXPANDER/GATE:</p> <p>Threshold Range OFF to +15dBu</p> <p>Expansion Ratio Adjustable 1.5:1 to 10:1</p> <p>Maximum Depth >50dB</p> <p>Attack Time Program-Dependent, approximately 2ms (at maximum attenuation)</p> <p>Release Time Program-Dependent, approximately 10ms/dB</p> <p>DYNAMIC RANGE:</p> <p>Typically 105dB</p> <p>POWER SUPPLY:</p> <p>Power Requirements 15 Watts</p> <p>Operating Voltage USA: 120VAC 60Hz, 100VAC 50/60Hz; EU: 230VAC 50/60Hz</p> <p>Operating Temperature 0°C to 45°C (32°F to 113°F)</p> <p>PHYSICAL:</p> <p>Dimensions 1.75" x 5.75" x 19" (4.5cm x 14.6cm x 48.5cm)</p> <p>Weight Net Weight: 4.5 lbs/2.04 Kg</p> <p>Shipping Weight: 6.54 lbs/2.97 Kg</p>
--	--

dbx engineers are constantly working to improve the quality of our products. Specifications are, therefore subject to change without notice.

dbx Professional Products 8760 S. Sandy Pkwy. 801.568.7660 PHONE 801.568.7583 INT'L FAX www.dbxpro.com
 Sandy, Utah 84070 801.568.7662 FAX customer@dbxpro.com