


G12T 'Hot 100'



With a massive 100W power rating, this speaker sits perfectly in high-power or hybrid amplifiers. It voices a modern sound with a big bass presence.

8 Frequency Response

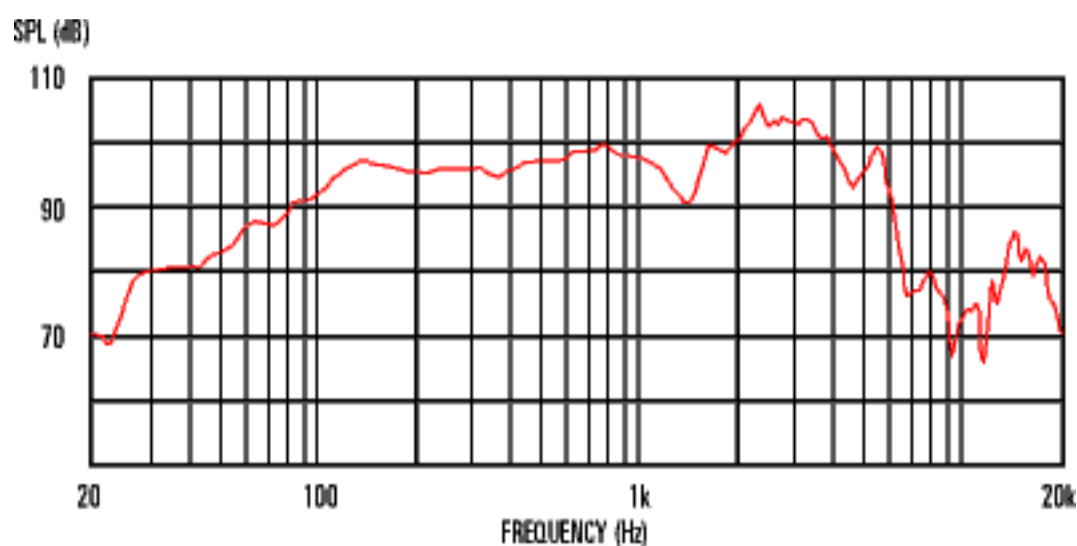

General Specifications

| | |
|-------------------------|----------------------------|
| Nominal diameter | 12", 305mm |
| Power rating | 100Wrms |
| Nominal impedance | Available 4 8 or 16 |
| Sensitivity | 97dB |
| Chassis type | Pressed steel |
| Voice coil diameter | 2", 50.8mm |
| Voice coil material | Round copper |
| Magnet type | Ceramic |
| Magnet weight | 35oz, 0.99kg |
| Frequency range | 80-5000Hz |
| Resonance frequency, Fs | 86Hz |
| DC resistance, Re | Available 3.4 7.4 or 14.83 |

Mounting Information

| | |
|---------------------------|----------------|
| Cut-out diameter | 11.1", 283mm |
| Diameter | 12.2", 309mm |
| Magnet structure diameter | 5.8", 148mm |
| Mounting slot dimensions | 0.31", 7.9mm Ø |
| Mounting slot PCD | 11.7", 297mm |
| Number of mounting slots | 4 |
| Overall depth | 4.9", 124mm |
| Unit weight | 7.1lb, 3.2kg |