


MEG 14-40-L B Gooseneck Microphone

FEATURES

- Gooseneck with integrated Sennheiser KE 10 microphone capsule
- RF shielding against intermodulation from wireless equipment/devices
- Streamlined design for seamless integration
- LED ring for speech indication
- AC/DC lightring powering
- Premium quality made in Germany

The MEG 14-40-L features a made in Germany quality gooseneck microphone on an attractive price. A lightring indicates the spokesperson that is allowed to take the floor. It features a Sennheiser KE 10 microphone capsule with cardioid directivity for universal miking. The flexible element of the streamlined 40 cm gooseneck ensures precise alignment of the microphone. A XLR 5M connector delivers power for the red LED ring and connects the microphone signal.

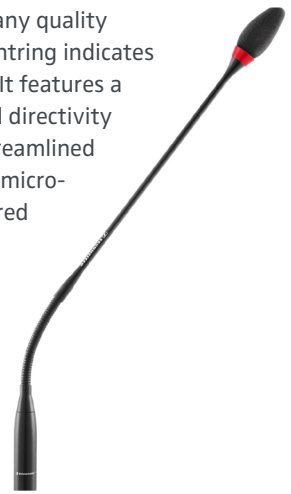

ARCHITECT'S SPECIFICATIONS

The microphone shall be a pre-polarized condenser designed for permanent installation or portable applications. It shall have a microphone capsule with a cardioid polar pattern with uniform 120° angle of acceptance (-3dB). The microphone shall include a lighted ring below the capsule for indicating the activity of the microphone. It shall have a frequency response of 50 Hz to 20,000 Hz and be capable of handling sound input levels up to 130 dBspl. Nominal equivalent noise level shall be 26 dBA (37 dB weighted as per CCIR 468-3). Output shall be low impedance balanced (<100 ohms). Operating temperature shall be 32° to 104° F (0° to 40° C). The microphone shall operate from an external 12V to 48V DC phantom power source; current consumption shall be 3 mA. The lighted ring shall operate from an external 8 – 30 V AC or DC power source; current consumption shall be 18 mA. The microphone shall offer radio frequency interference (RFI) shielding against intermodulation from wireless equipment or devices.

Continued on page 2


TECHNICAL DATA

Transducer principle.....	pre-polarised condenser microphone
Acoustics	cardioid
Frequency response	50 Hz - 20 kHz
Nominal impedance	< 100 Ohm
Maximum sound pressure level	130 dB SPL
Equivalent noise level	26 dB (A)
Equivalent noise level weighted as per CCIR 468-3	37 dB
Phantom powering.....	P12 - P48 V
Current consumption microphone	3 mA
Lightring powering	8 - 30V
Current consumption lightring	18 mA
Connectivity.....	XLR 5M
Weight	147 g (4,72 oz)
Length.....	450 mm (17,72")
Diameter	8 mm (0,31")
Operating temperature	0 ...+40°C
Coating.....	matte black
Delivery includes.....	MEG 14-40-L B


MEG 14-40-L B Gooseneck Microphone

The microphone shall be a gooseneck design ensuring precise alignment of the microphone and noiseless operation. It shall incorporate a self-contained power module with an XLR5M-type connector at the base, which includes connection for the lighted ring power. The microphone shall be a small-diameter gooseneck design with a diameter of 0.31" (8 mm) and an overall length of 18" (457.2 mm). Head diameter shall be 0.9" (22.8 mm). The microphone weight shall be 4.72 oz (147 grams). Finish shall be matte black. The microphone shall be Sennheiser MEG 14-40-L B.


DIMENSIONS

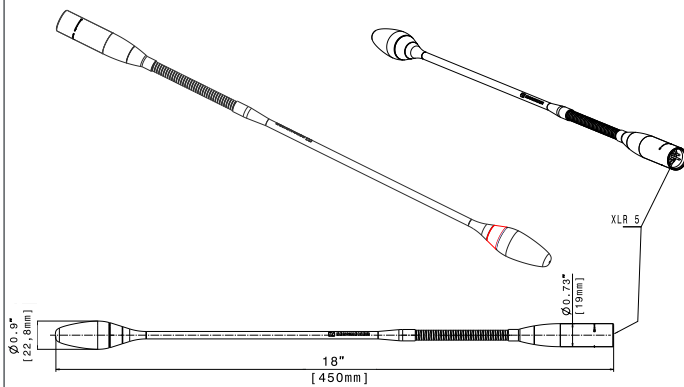

POLAR PATTERN

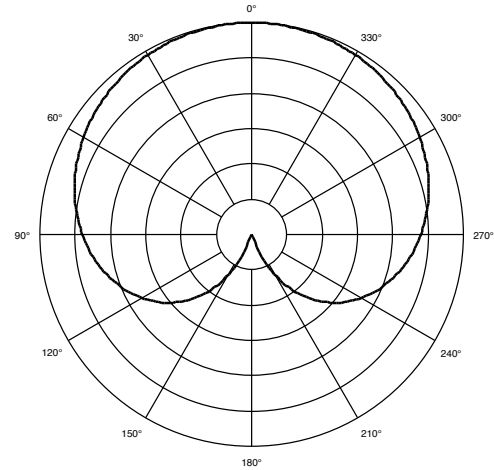

FREQUENCY RESPONSE

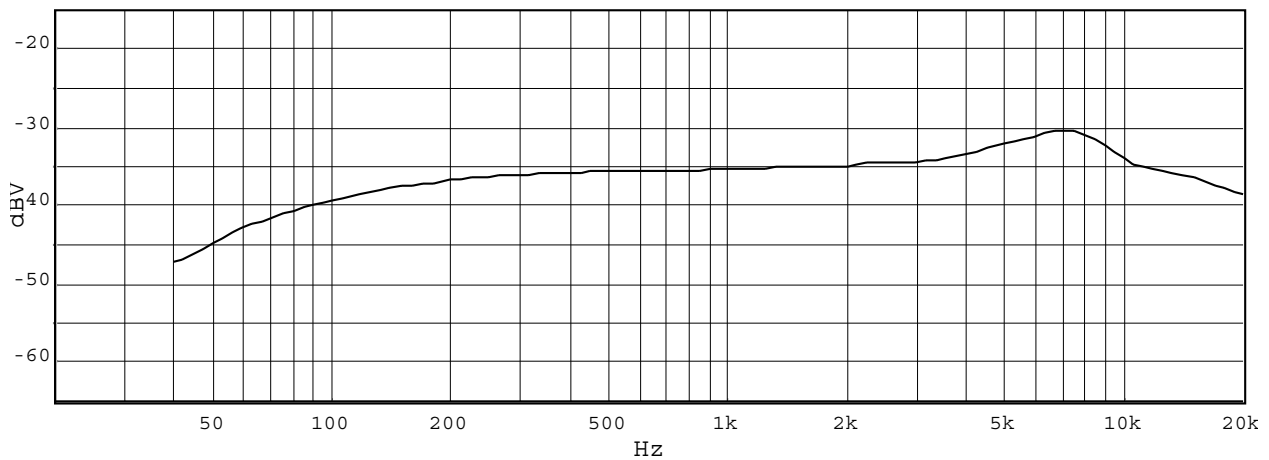

PRODUCT VARIANTS

MEG 14-40 B Cat. No. 504791
 MEG 14-40-L B Cat. No. 504792

RECOMMENDED ACCESSORIES

MZS 31, Shockmount Cat. No. 005087
 MZT 30-L, XLR5 install socket Cat. No. 005085

Sennheiser electronic GmbH & Co. KG
 Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com

