


PULSE10



With its robust steel-chassis, PULSE10, provides a rock-solid bass performance whether alone in a single speaker combo, in a 4x10 or even an 8x10 cab. Expect a tight, punchy low end with a warm mid-range that's full of presence, bringing focus and articulation to your playing. This heavy-duty driver truly delivers bass you can feel as well as hear.

8 Frequency Response

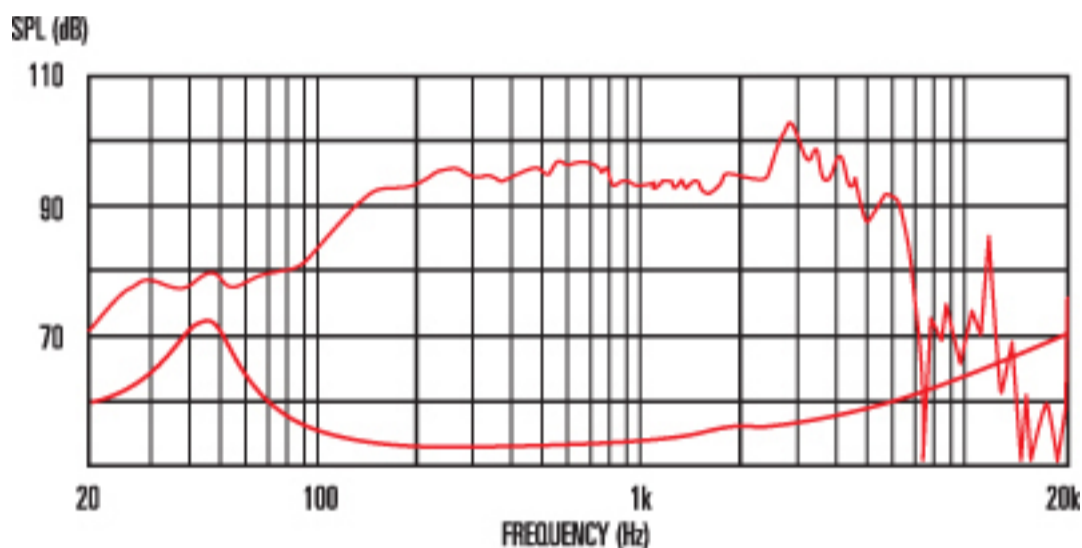

General Specifications

Nominal diameter	10", 254mm
Power rating	200W
Nominal impedance	8Ω
Sensitivity	94dB
Magnet type	Ferrite
Voice coil diameter	2", 50.8mm
Coil material	Copper
Cone material	Kevlar loaded paper
Former material	Polyimide
Surround material	Cloth-sealed
Frequency range	45-3500Hz
Xmax	0.15", 4mm
Gap depth	0.31", 8mm
Voice coil winding width	0.62", 16mm
Voice coil material	Copper

Small Signal Parameters

D	0.21m/8.3in
Fs	68Hz
Mms	32.9g/1.16oz
Qms	2.54
Qes	0.53
Qts	0.44
Mmd	29.26g/1.03oz
Re	6.03Ω
Vas	25.8lt/0.91cu.ft.
Bl	12.88Tm
Cms	0.15mm/N
Rms	5.79kg/s
Le (at 1kHz)	0.92mH

Mounting Information

Cut-out diameter	9", 229mm
Diameter	10.1", 256mm
Mounting slot dimensions	0.24x0.31", 6x8mm
Mounting slot PCD	9.6", 245mm
Number of mounting slots	4
Overall depth	4.3", 110mm
Unit weight	6.6lb, 3kg