


Recording Artists

RØDE[®]
MICROPHONES



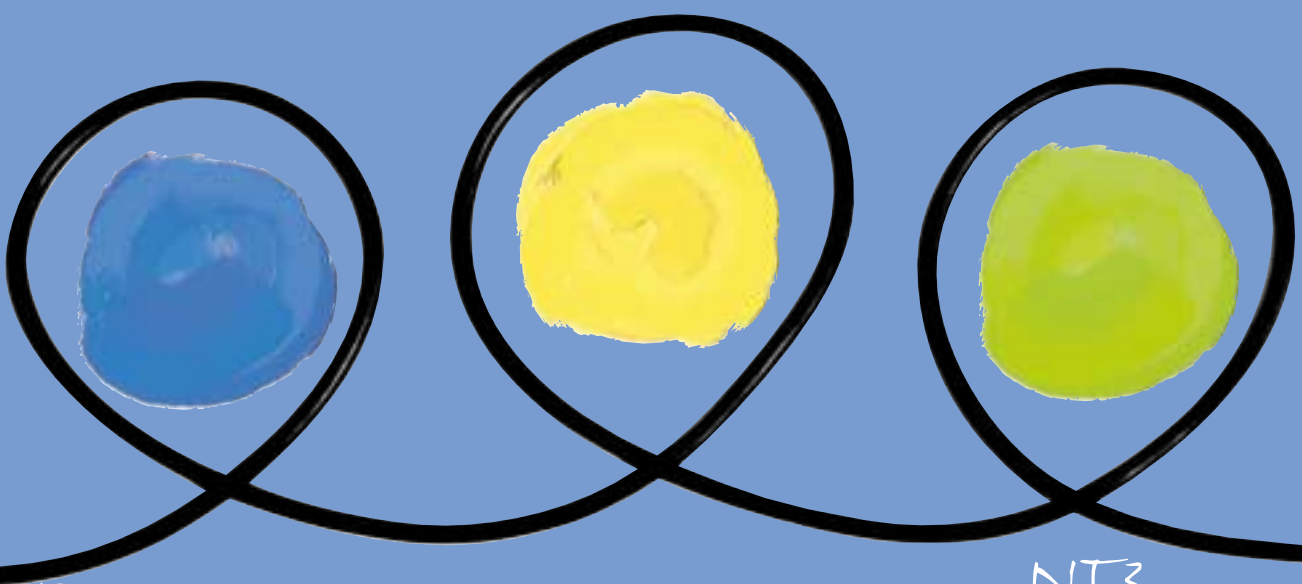

Features:

- Transformerless output
- Internal capsule shock mounting
- Heavy duty Cast metal/satin nickel body
- High immunity to RF interference
- High strength welded and heat treated mesh head
- Premium quality surface mount components
- True condenser (externally biased)
- Hypercardioid polar response
- Full frequency response
- Battery status LED indicator
- 12 months parts and labour guarantee



Accessories included:

- Zip pouch
- Wind Shield
- Stand Mount with 3/8"-5/8" Thread Adaptor




NT3

Stylish and modern, the NT3 is the latest in microphone technology. Purpose built for studio, stage and location work. The NT3 is made from the finest components to deliver results demanded by engineers and musicians alike.

The NT3 features battery and phantom power and its low noise makes it hard to match. The RØDE NT3 - when superior sound quality is demanded.

Specifications:

Capsule:	Externally polarised 19mm (3/4") condenser
Active Electronics:	JFET impedance converter with bipolar output buffer
Pickup Pattern:	Hypercardioid (see graph)
Frequency response:	20 Hz-20 kHz
Output Impedance:	200Ω
Sensitivity:	-39dB re 1volt/pascal (12mV @ 94dB SPL) +/-2dB
Equivalent Noise:	<17 dBA ("A"-weighted per IEC268-15)
Maximum Output:	+9.5dBu (@ 1% THD into 1KΩ)
Dynamic Range:	> 123dB (per IEC268-15)
Maximum SPL:	> 140dB SPL (@ 1% THD into 1KΩ)
Signal/Noise Ratio:	> 77dB (per IEC268-15)
Power Requirements:	P48, P24, P12 phantom 9V battery
Packed Weight:	680g (Mic only no battery 371g)

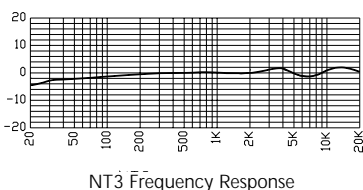

RØDE

MICROPHONES

PROUDLY MADE IN AUSTRALIA

