

swissonic

M-Control - passive volume controller

Quick Start Guide

This quick start guide contains important information on the safe operation of the product. Read and follow the safety advices and instructions given. Retain the manual for future reference. If you pass the product on to others please include this manual.

Safety instructions

Intended use

This product is meant to be used for the passive attenuation of line level audio signals. Any other use or use under other operating conditions is considered to be improper and may result in personal injury or property damage. No liability will be assumed for damages resulting from improper use.

Danger for children



Ensure that plastic bags, packaging, etc. are disposed of properly and are not within reach of babies and young children. Choking hazard! Ensure that children do not detach any small parts from the product. They could swallow the pieces and choke!

Where to use the product

Never use the product

- in conditions of extreme temperature or humidity
- in extremely dusty or dirty areas
- at locations where the unit can become wet


General handling

- To prevent damage, never use force when handling the product.
- Never immerse the product in water. Just wipe it with a clean dry cloth. Do not use liquid cleaners such as benzene, thinners or flammable cleaning agents.


Features

- Pure passive circuitry for absolutely distortion-free volume control of audio signals
- Ideal for volume control between DAWs and active monitors
- Allows precise attenuation adjustment in 1-decibel steps from 0 dB to ∞
- MUTE button
- MONO button
- Balanced XLR / 1/4" combo inputs and one unbalanced 3.5 mm phone jack stereo input
- Balanced XLR outputs and one unbalanced 3.5 mm phone jack stereo output

Operating elements

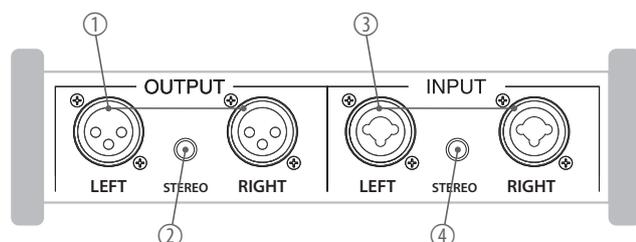

- 1 XLR output, balanced
- 2 3.5 mm phone jack stereo output
- 3 XLR / 1/4" combo inputs, balanced
- 4 3.5 mm phone jack stereo input
- 5 MUTE button
- 6 Volume control
- 7 MONO button

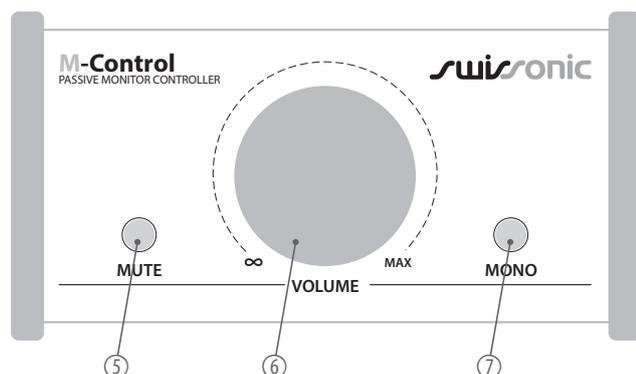

Using the product

1. Connect the signal source whose volume you want to control with the unit to the XLR / 1/4" combo or mini-jack input.
2. Connect the device to which the signals are to be sent to the XLR or mini-jack output.
3. Adjust the volume of the signals as desired with the volume control.
4. To mute the signals, press the MUTE button. Pressing the MUTE button again will unmute the signals.
5. To turn stereo signals into mono, press the MONO button.



For the transport and protective packaging, environmentally friendly materials have been chosen that can be supplied to normal recycling. Ensure that plastic bags, packaging, etc. are properly disposed of. Do not just dispose of these materials with your normal household waste, but make sure that they are collected for recycling. Please follow the notes and markings on the packaging.



This product is subject to the European Waste Electrical and Electronic Equipment Directive (WEEE) in its currently valid version. Do not dispose of your old device with your normal household waste. Dispose of this product through an approved waste disposal firm or through your local waste facility. Comply with the rules and regulations that apply in your country. If in doubt, consult your local waste disposal facility.