

# AIRMATE-USB

ANALOG PRODUCTION | ON-AIR CONSOLE



## MIC, LINE, USB AND TELEPHONE IN-OUTPUTS.

**We designed the Airmate-USB to fulfil the requirements for a high grade low cost radio production mixer.**

**Built around well proven low noise circuitry, this console is the reliable workhorse for the self-op production D.J. that needs an internal Telephone Hybrid (2x) and USB connection to the PC (e.q. for streaming to the web)**

**A heavy duty 19" rack mounted RF shielded chassis houses 8 vertical triple input modules giving flexibility rarely found in a mixer of this type.**

**Six input channels with high quality balanced microphone inputs on XLR and two stereo line level inputs on Cinch (RCA) connectors. And... every line level line B input can be converted into a phono (gramophone) channel by simply fitting an optional stereo R.I.A.A. equalized phono pre-amp.**

This new Airmate-USB model has 6 balanced mic inputs (+48 phantom is standard), 12 stereo line inputs, 2x USB and 2x Telephone Hybrids. Channel 5 and 6 have Mic/Line and USB interface to transfer audio from and to your PC.

Channel 7 and 8 have, apart from the stereo line input, also RJ-11 connectors to interface with a POT line and a telephone appliance. High quality built in Hybrids with R and C balance and direct Talk back in the Hybrid channels makes a conversation with listeners very easy.


The front panel ON switch is wired in series with the built in mechanical faderstart enabling selection of start either by fader or hard start via the ON switch. Faderstart generates in the Mic mode a Mic-on signalling to switch on ON-Air lights. There is a 3 band Equalizer on channel 1-6. The stereo Aux send can be set pre or post fader. All mic inputs have low cut jumpers. A clean feed send is available for external Hybrids.

## EXTENSIVE MASTER SECTION DESIGNED FOR RADIO.

The Airmate-USB has the usual master controls such as stereo master faders, stereo Aux send and return, monitor master with "follow phones" and a phones output with a split control function. There is a balance control to continuously adjust the volume between main output and stereo Cue signal.

In addition, there is a special Radio On-air/production section featuring; Self-op switching to automatically cut control room level when the D.J. mic is active; a Clean feed output to also drive an external Telephone Hybrid for talk shows and interviews, if you need more Hybrid channels than the 2 built in ones; a special announcer output that normally follows main output but can be switched so that the main output, or any cue signal that is selected, can be heard when in the "follow phones" mode.

A large Talkback switch activates the built-in electret talkback microphone for easy communication with the Clean-feed output, Aux output and/or Announcer output.

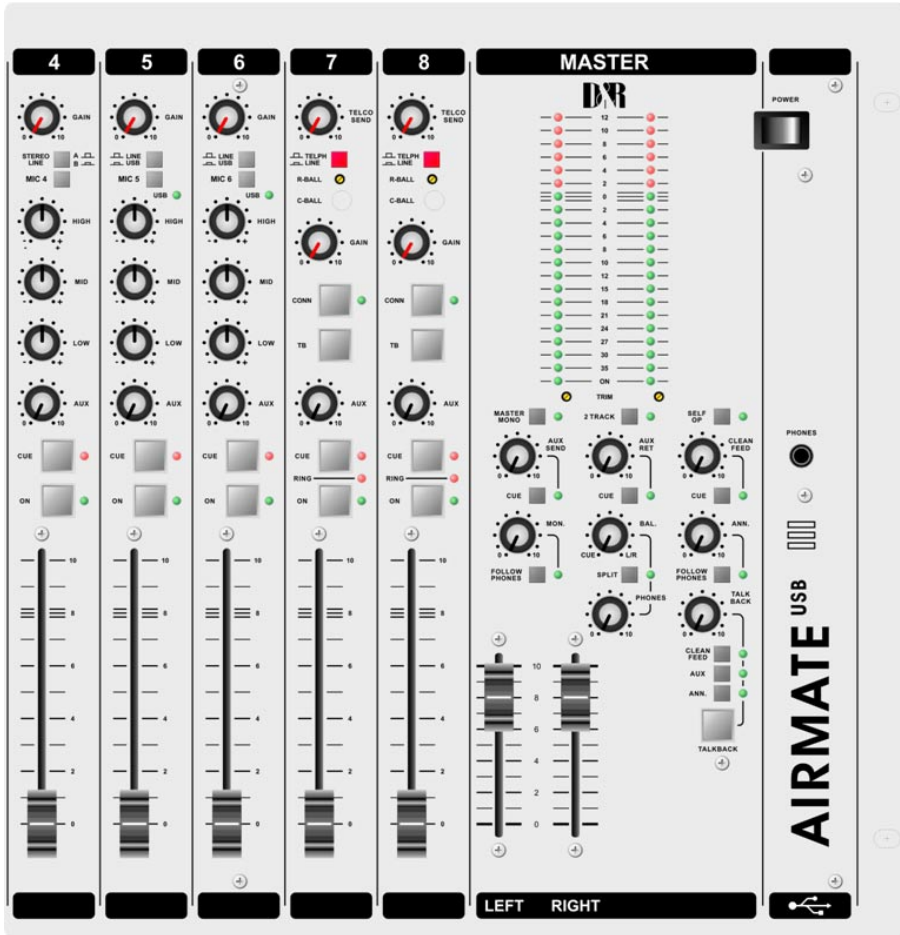

## NOW IS THE TIME TO INSTALL YOUR OWN ON-AIR/PRODUCTION ROOM/WEBRADIO.

The Airmate-USB is designed to be the focal point for local radio production work in the studio or at home. It's comprehensive, yet understandable features make it the ideal companion for rapid on-the-spot radio programmes.

Small, reliable and 19" rack mounting ideal for production rooms. It can also double as an On-Air mixer or implemented in your own Internet Radio station. If your budget is tight, it never becomes obsolete as it can revert to production use, if, at a later date you fit in a larger On-Air mixer.

## SUMMARY.

We hope this brief overview has given you a good insight into the potential of this new "Airmate-USB" on-air console.

If you require further information please do not hesitate to contact one of our offices or your local dealer who will be pleased to assist you.

Look at our website for distributor details.

## SPECIFICATIONS.

### INPUTS.

Mic inputs: bal, 2kOhm, XLR. Phantom: 48 volt.

Noise: - 122 dB (A-weighted).

Sensitivity: - 70dB min, OdB max.

Line inputs: unbal., 10kOhm, Cinch.

Gain: range of 40dB.

Phono inputs: unbal. 47kOhm, 5 mV.

2 Track return: - 10 dBV at 10kOhm.

Aux returns: - 10 dBV at 10kOhm ster

### USB.

Fully compliant with USB 2.0 playback and record mode.

HID Functions: Volume/Mute

### TELEPHONE HYBRIDS.

RJ-11 connectors for phone line/dialler Mix Minus rejection @1kHz -60dB.

### OUTPUTS.

Left/Right: + 4 dBu bal. XLR.

Monitor/Aux : + 4dBu unbal. on Cinch.

Cleanfeed/Announcer: + 4dBu, Jacks.

Tape outp: -10dBV, unbal. Cinch.

Headphone: 16-600 Ohm, Jack.

Announcer: 16-600 Ohm, Jack.

### EQUALIZER.

High: + / -12 dB at 12kHz shelving.

Mid: + / -12dB at 1 kHz bell curve.

Low: + / -12dB at 60 Hz bell curve.

### OVERALL

Frequency response: 10 - 60.000Hz.

Distortion: < 0.009% max at 1 kHz.

Start switch: reed relay.

Ledbars: 21 segment.

### DIMENSIONS:

19" rack mountable.

Height: 356mm (8HE).

Depth: 95mm.

Weight: 9kg.

### HEADOFFICE

D&R Electronica Weesp b.v.

Rijnkade 15B

1382 GS WEESP

The Netherlands

Phone: ++31 (294) 418 014

Fax: ++31 (294) 416 987

Website: [www.d-r.nl](http://www.d-r.nl)

E-mail: [info@d-r.nl](mailto:info@d-r.nl)

