

# MOUNTING INSTRUCTIONS

## DIFFUSOR MANHATTAN

These instructions are for the following products: Manhattan EPS.



### TOOLS


The following tools are needed for installation:

- ✓ Box Cutter
- ✓ Caulk Gun
- ✓ Pencil
- ✓ Level
- ✓ Folding ruler or tape measure
- ✓ **t.akustik glue**

*We recommend using our t.akustik glue for installation.*

### UNBOXING

Open the package carefully! Inserting sharp objects into the package can damage the diffuser. Avoid using long, sharp tools for opening the package!

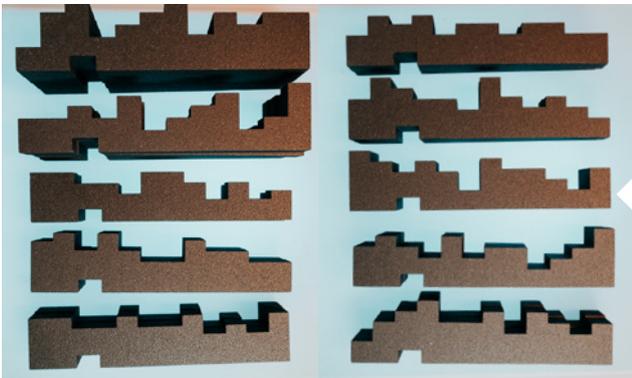

### REMOVE PRODUCTS FROM PACKAGING

Carefully remove the products from the package and read the instructions. Then remove the various elements and stack them alphabetically in 2 groups, according to the letters A to J referenced in the instructions.

*Tip: It's easiest to remove four stacked elements from the package at a time!*

### ASSEMBLE TWO DIFFUSERS AT THE SAME TIME

For assembly, place the two brackets (element K) next to each other and add the various elements to both at the same time, in the order specified in the instructions:

**A - G - I - C - J - B - D - H - E - F - A - B**

Then, apply light pressure to each element to put them in place. Take care while adding the elements to the bracket and avoid using excessive force.



#### TIP:

*The elements are nested in the package and must be removed carefully. Sorting the individual parts is easiest when four stacked elements are removed from the package at the same time.*



## DETERMINE THE POSITION

While determining the mounting positions, it helps to mark the walls and ceiling using a level and tape measure, in order to achieve even spacing in relation to corners and sound sources.

## PREPARE THE CAULK GUN

Carefully open the glue cartridge using a utility knife. Take care to move the knife away from your body. Thread the included nozzle onto the opening. Insert the cartridge into the caulk gun. *For thicker lines of glue, you can use the knife to enlarge the opening of the nozzle.*




## APPLY THE GLUE

Apply the glue to the back of the diffuser in an even line along the outer edge. It also helps to apply some glue to the center of the diffuser in an X pattern, in order to hold the center firmly in place. *Depending on the condition of the walls, we recommend using a generous amount of glue along the outer edges.*

## LET GLUE SET FOR 5 MINUTES

Before mounting the diffuser on the wall, let the glue set for 5 minutes on the element. This ensures that it can develop its full holding strength.

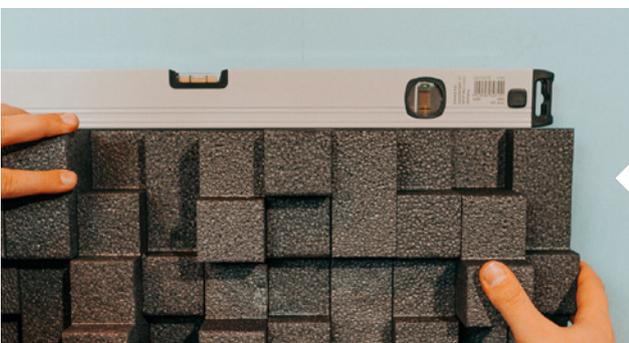

## INSTALL THE DIFFUSER

Press the diffuser onto the wall in the marked position and apply even pressure along the lines of glue for 2 minutes. We recommend checking the alignment using a level and making necessary adjustments by slightly rotating the element. That's it!



Find more solutions for your room on our website: [www.takustik.com](http://www.takustik.com)



Share your installation with us on Instagram: [www.takustik.com/instagram](https://www.takustik.com/instagram)



Find more installation guides on YouTube: [www.takustik.com/youtube](https://www.takustik.com/youtube)

This product is intended to be used to optimise the room acoustics. Any other use or use under other operating conditions is considered to be improper and may result in personal injury or property damage. No liability will be assumed for damages resulting from improper use.



Ensure that plastic bags, packaging, etc. are disposed of properly and are not within reach of babies and young children. Choking hazard!



When opening the glue cartridge using a knife or a cutter, pay attention not to injure your fingers/hands. Risk of cutting!



For the transport and protective packaging, environmentally friendly materials have been chosen that can be supplied to normal recycling. Ensure that plastic bags, packaging, etc. are properly disposed of. Do not just dispose of these materials with your normal household waste, but make sure that they are collected for recycling. Please follow the notes and markings on the packaging.