Millenium

MPS-150X e-drum set





assembly instructions

Musikhaus Thomann Thomann GmbH Hans-Thomann-Straße 1 96138 Burgebrach Germany Telephone: +49 (0) 9546 9223-0 E-mail: info@thomann.de Internet: www.thomann.de

18.07.2017, ID: 407855 (V2)

Table of contents

1	Safety instructions	4
2	Scope of delivery	5
3	Assembly	6
4	Protecting the environment	10



MPS-150X

1 Safety instructions

A DANGER!

Danger for children

Ensure that plastic bags, packaging, etc. are disposed of properly and are not within reach of babies and young children. Choking hazard!

Ensure that children do not detach any small parts (e.g. knobs or the like) from the unit. They could swallow the pieces and choke!

Never let children unattended use electrical devices.



2 Scope of delivery

Before you assemble your drum set, make sure the contents of package is complete according to the following list.

e-drum set Millenium MPS-150X


- e-drum modul Millenium MPS-150X
- Rack with pad brackets
- Hi Hat Controller
- Bass drum pedal (complete)
- Pad wiring
- Mains power adapter
- Pads:
 - $1 \times \text{Hi-hat}$
 - $1 \times \text{Ride}$
 - $1 \times Crash$
 - $3 \times \text{Mesh}$ Head Tom
 - $1 \times Mesh$ Head Snare
 - 1 × Mesh Head Bass Drum
- 5 × angle brackets for Tom pads and drum module
- 3 × Cymbal brackets
- 2 × handscrews
- 1 × set of drumsticks
- Drum Key
- Manual e-drum modul
- Assembly instructions e-drum set



3 Assembly

Overview

Loosen the screws of the clamps before sticking the tubes together. Mount the various elements in the specified sequence. The positions of the pads, cymbals, etc. are shown in the illustration below.

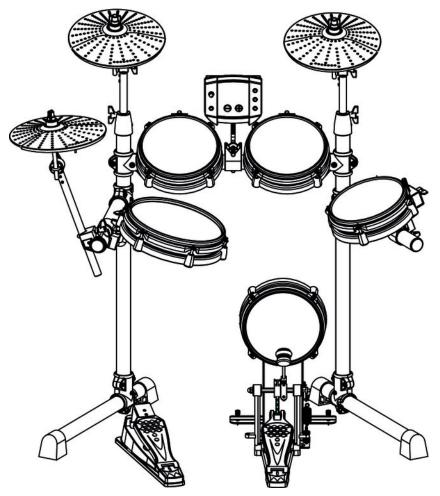




Assembling the rack



Danger of cuts on hands and fingers

When connecting the parts, take care for sharp edges on the metal tubes, screws etc.



1	Align the mounting brackets for the connecting pipe and the two side arms of the rack in terms of height and desired playing position. Insert the connecting pipe and the two sides arms into the brackets and then tighten all mounting screws. The left side arm is longer than the right one.
2	Position the two foot pieces on the floor and put the two side pipes of the rack into the provided mounting brackets. Make sure that the ends of the side pipes are lying on the floor. Then tighten the mounting screws.
3	Position the mounting brackets for the individual pads. Then tighten the mounting screws. Turn the angle pieces in the right position for mounting the pads. Then tighten the mounting screws.
4	Insert the crash pad, ride pad and hi-hat pad supports into the respective mounting clamps on the rack. Attach the brackets using the mounting screws at the desired height.
5	Loosen the retaining screws on the bracket joints and turn the brackets into the desired playing positions. Then retighten the locating screws firmly.

th • mann MUSIC IS OUR PASSION


Mounting pads on the rack



- 1. Attach the supplied L-pieces to the pads. Tighten the wing nuts on the pads by hand first.
- **2.** Then slide the plastic ends of the L-pieces up to the stop into the designated clamps on the rack.
- **3.** Align the pads on the rack to meet your needs and tighten the wing nuts of the pad brackets and the bolts of the pad clamps on the rack firmly and evenly.

Mounting cymbals on the rack

- **1.** Put the three cymbal holders as shown into the designated clamps on the rack.
- **2.** Tighten the bolts on the clamps firmly and evenly.



- **3.** Unscrew the wing nuts from the cymbal holders and take the felt washers off the holders.
- **4.** Place the cymbals as shown in the figure on the holders.
- **5.** Place the felt washers on the cymbals and fix the cymbals with the associated wing nuts on the holders.


Mounting the drum module on the rack



- **1.** Put the drum module up to the stop into the free clamp of the connecting pipe.
- **2.** Align the module and tighten the wing nut of the clamp.



Setting up the bass drum pedal



- **1.** Snap the two metal rods into the holes provided on the frame of the bass drum pedal.
- **2.** Place the beater into the hole provided on the rotary head of the pedal and tighten the clamp with the drum key.

Bass drum and Hi-hat

- **1.** Place the bass drum pad centred under the rack. Position the drum pedal centred in front of the pad.
- **2.** Place the Hi-hat pedal left of the bass drum pad.

Setting up and wiring

Set up the rack, the pads and the cymbals according to your needs. Finally, position the drum pedal and the Hi-hat controller in front of the rack and connect all trigger cables to the drum module.

Î

The head tension of the Mesh Heads is quite low in delivery condition to avoid damages during transport. Adjust the head tension to suit your taste for good playing and a better trigger behaviour.



4 Protecting the environment

Disposal of the packaging material



For the transport and protective packaging, environmentally friendly materials have been chosen that can be supplied to normal recycling.

Ensure that plastic bags, packaging, etc. are properly disposed of.

Do not just dispose of these materials with your normal household waste, but make sure that they are collected for recycling. Please follow the notes and markings on the packaging.

Disposal of your old device



This product is subject to the European Waste Electrical and Electronic Equipment Directive (WEEE). Do not dispose with your normal household waste.

Dispose of this device through an approved waste disposal firm or through your local waste facility. When discarding the device, comply with the rules and regulations that apply in your country. If in doubt, consult your local waste disposal facility.



 $Musikhaus \ Thomann \cdot Hans - Thomann - Straße \ 1 \cdot 96138 \ Burgebrach \cdot Germany \cdot www.thomann.de$