


Assembly instructions

- Fasten element K to the wall using a water based adhesive like 'the t.akustik Contact Glue'. Put elements A, B, C, D, E, F, G, H, I and J on element K in this order: A, G, I, C, J, B, D, H, E, F, A, B.

A - 4 x



B - 4 x



C - 2 x




D - 2 x




E - 2 x




F - 2 x




G - 2 x



H - 2 x




I - 2 x




J - 2 x



K - 2 x

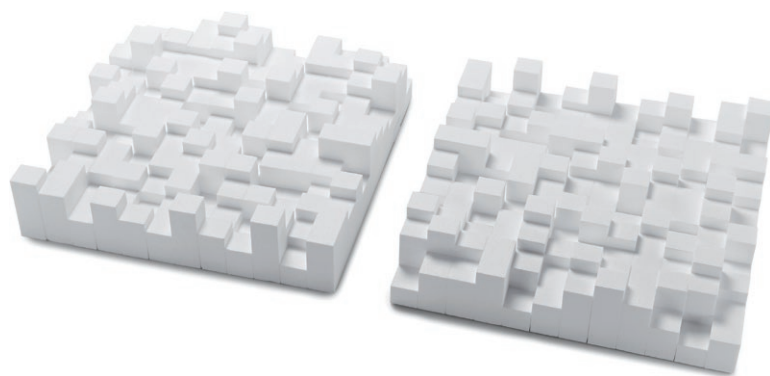

- Material: hardened EPS foam
- To optimize room reflections and acoustic room properties
- Suitable for recording studios, radio station, home recording and hifi rooms
- Effective frequency: approx. 900 - 3250 Hz
- Can be painted with water-based paints (use only solvent-free paints!)
- Easy assembly and disassembly
- Dimensions (W x H x D): 600 x 150 x 600 mm
- 13 single elements per kit
- Colour: white
- Scope of delivery: 2 sets of kits incl. assembly instructions

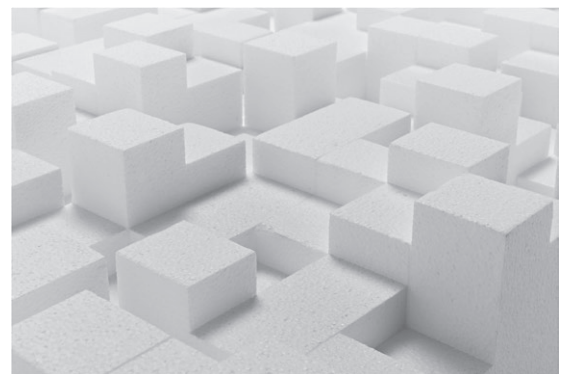

This device is used to optimize room acoustics. Any other use or use under other operating conditions is considered to be improper and may result in personal injury or property damage. No liability will be assumed for damages resulting from improper use.



Ensure that plastic bags, packaging, etc. are properly disposed of and are not in the reach of babies and young children. Choking hazard!



For the transport and protective packaging, environmentally friendly materials have been chosen that can be supplied to normal recycling. Ensure that plastic bags, packaging, etc. are properly disposed of. Do not just dispose of these materials with your normal household waste, but make sure that they are collected for recycling. Please follow the notes and markings on the packaging.