

Condenser Microphones

SINGLE DIAPHRAGM CONDENSER MICROPHONES C-4

2 Matched Studio Condenser Microphones

- 2 matched condenser microphones for stereophonic studio recording and live applications
- Ideal as main and support microphones for studio and live applications
- Cardioid pickup pattern for effective feedback elimination
- Low-mass diaphragm for ultra-wide frequency response and ultimate sound reproduction
- Switchable low-frequency roll-off and input attenuation
- Ultra low-noise transformerless FET input eliminates low-frequency distortion
- Ultra-rugged construction with metal die-cast body
- Gold-plated 3-pin XLR connector for highest signal integrity
- Stand adapters, windscreens, stereo-bar and transport case included
- High-quality components and exceptionally rugged construction ensure long life
- Conceived and designed by BEHRINGER Germany



C-4 microphones are built to capture the performance of a choir, piano or any other vocal or acoustic sound source to provide a beautiful true-to-life sound. Sold in perfectly matched pairs, these outstanding condenser mics are especially great for live applications because their non-reflective finish eliminates unwanted glare caused by stage lighting.

What is a condenser microphone?

A condenser mic is the ideal choice for capturing vocals or acoustic instruments, either in live or recording settings. By their very nature, condenser microphones are much more sensitive than dynamic microphones, enabling them to pick-up even the subtlest of signals. Thanks to their cardioid (heart-shaped) pattern, C-4 microphones pickup your source signal while rejecting off-axis sounds that can ruin an otherwise perfect recording. Another difference between condenser and dynamic mics is they contain active circuitry that requires phantom power

(+48 V DC) for operation. You can power them from any phantom power equipped BEHRINGER XENYX mixer, plus enjoy the benefits of our state-of-the-art XENYX mic preamps.

Sound That Astounds

Every stitch of these mics is designed to deliver beautiful sound. Beginning with the gold-plated 3-pin XLR connector, you get the highest signal integrity.

Once they are connected to your sound system, you'll notice these twin pro-caliber microphones have exceptional frequency response (an average boost of 4dB between 1kHz-8kHz). For those of you who are new to condenser mics, this basically means you'll get a slightly brighter sound that will give the perfect shape to cymbals and overhead mic'ing. Acoustic pianos and choirs will also benefit greatly from this frequency response.


Continued on next page



SINGLE DIAPHRAGM CONDENSER MICROPHONES C-4

The cardioid pickup pattern provides unparalleled sound source separation and feedback rejection. C-4 mics contain ultra low-noise transformerless FET input circuitry that can handle extreme dynamics (from 20 Hz to 20 kHz) and has a maximum sound pressure level of 136 dB. So even if the featured performer at your next recording session or live show happens to be a revved-up jet engine, this workhorse mic will not distort!

C-4 mics also feature a switchable low-frequency rolloff to eliminate infrasonics (mic handling noise, nasty sound created by creaky stages), as well as a switchable -10 dB input attenuation to accommodate for hot signals, such as a really loud vocalist or overzealous cellist.

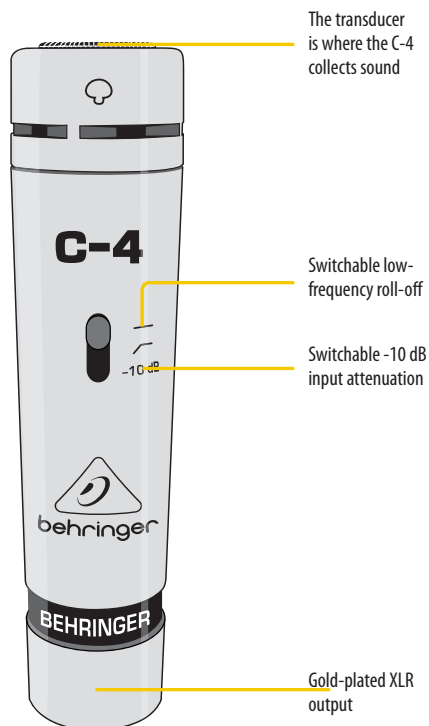


But wait, there's more...


The C-4 mics not only sound great, they come packed with custom stand adapters, windscreens, a stereo bar for

mounting both mics in stereo alignment, and a transport case. As soon as you break them out of the box, these mics are ready to become a mind-blowing addition to your sound arsenal.

Live Recording

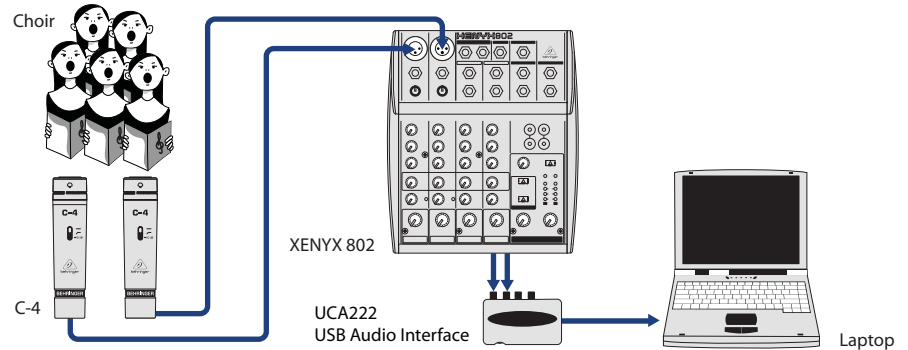

Live Performance

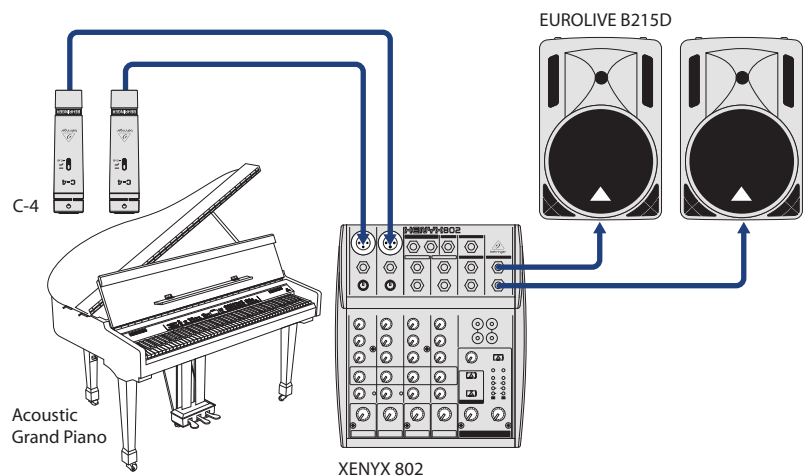

Specifications

Transducer type	condenser, 16 mm (0.63")
Polar pattern	cardioid
Connector	gold-plated balanced XLR connector
Open circuit sensitivity (@ 1kHz)	-38 dBV (0 dBV = 1 V/Pa)
Frequency response	20 Hz to 20 kHz
Level attenuation	-10 dB, switchable
Low-cut filter	6 dB/oct. @ 120 Hz (switchable)
Max. SPL ($\leq 1\%$ THD @ 1 kHz)	136 dB

Nominal impedance	75 Ω
Load impedance	> 1 k Ω
Supply voltage	+48 V
Supply current	3 mA
Dimensions	\varnothing shaft: 0.9", length: 3.7" \varnothing shaft: 23 mm, length: 94 mm
Weight	approx. 0.66 lbs/approx. 0.30 kg

Please note these specifications are preliminary and conceptual in nature, and as such are subject to change as product development progresses. This information is supplied for market research purposes only and is not to be made public in any manner. This document is solely the property of The MUSIC Group, or one of its subsidiaries, and must be surrendered upon request of the owner.

For service, support or more information contact the BEHRINGER location nearest you:

Europe MUSIC Group Services EU GmbH
Tel.: +49 2154 9206 4149 / Fax: +49 2154 9206 4199

USA/Canada MUSIC Group Services US Inc.
Tel.: +1 425 672 0816 / Fax: +1 425 673 7647

Singapore MUSIC Group Services SG (Pte.) Ltd
Tel.: +65 6845 1800 / Fax: +65 6214 0275

Australia MUSIC Group Services AU Pty Ltd
Tel.: +61 03 9877 7170 / Fax: +61 03 9877 7870

Japan MUSIC Group Services JP K.K.
Tel.: +81 3 5281 1180 / Fax: +81 3 5281 1181

TECHNICAL SPECIFICATIONS AND APPEARANCES ARE SUBJECT TO CHANGE WITHOUT NOTICE AND ACCURACY IS NOT GUARANTEED. BEHRINGER IS PART OF THE MUSIC GROUP (MUSIC-GROUP.COM). ALL TRADEMARKS ARE THE PROPERTY OF THEIR RESPECTIVE OWNERS. MUSIC GROUP ACCEPTS NO LIABILITY FOR ANY LOSS WHICH MAY BE SUFFERED BY ANY PERSON WHO RELIES EITHER WHOLLY OR IN PART UPON ANY DESCRIPTION, PHOTOGRAPH OR STATEMENT CONTAINED HEREIN. COLORS AND SPECIFICATIONS MAY VARY FROM ACTUAL PRODUCT. MUSIC GROUP PRODUCTS ARE SOLD THROUGH AUTHORIZED FULFILLERS AND RESELLERS ONLY. ALL RIGHTS RESERVED. © 2011 MUSIC Group IP Ltd. Trident Chambers, Wickhams Cay, P.O. Box 146, Road Town, Tortola, British Virgin Islands. 985-10000-00387