

Manual



Distributor DMX

DD-6



Table of contents

1. Safety instructions	3
1.1. FOR SAFE AND EFFICIENT OPERATION	3
2. Control	5
3. Technical Data.....	6



1. Safety instructions



- Read the safety instructions and also this manual carefully.
- Keep the manual.
- Observe all red flags.
- Observe the manual.
- To prevent fire or electric shocks, protect the device against rain and humidity
- Pull the plug before opening the housing.
- To prevent an electric shock you should not remove the cover.
- Do not operate the device in the near of water.
- Use only a dry cloth for cleaning.

1.1. FOR SAFE AND EFFICIENT OPERATION

Be careful with heat and extreme temperature

Avoid exposing it to direct rays of the sun or near a heating appliance.

Not put it in a temperature bellow 41°F /5°C, or exceeding 95°F /35°C.

To avoid placing on un-stable location

Select a level and stable location to avoid vibration.

Do not use chemicals or volatile liquids for cleaning

Use a clean dry cloth to wipe off the dust, or a wet soft cloth for stubborn dirt. Pull the plug before cleaning.

If out of work, contact sales agency immediately

Any troubles arose, remove the power plug soon, and contact with an engineer for repairing, do not open the cabinet by yourself, it might result a danger of electric shock.

Take care with the power cable

Never pull the power cable to remove the plug from the receptacle, be sure to hold the plug. When not using the device for an extended period of time, be sure to disconnect the plug from the receptacle.

Ventilation

It is not allowed cover fans and air in and outlets.



Safety

Do not remove the grounding. It is for your safety. If you remove the grounding it can cause electric shocks.

Accessory


Please use only the accessory which is set by the manufacturer.

Important

Damages caused by the disregard of this user manual are not subject to warranty. The dealer will not accept liability for any resulting defects or problems. Make sure the electrical connection is carried out by qualified personnel. All electrical and mechanical connections have to be carried out according to the European safety standards.



2. Control

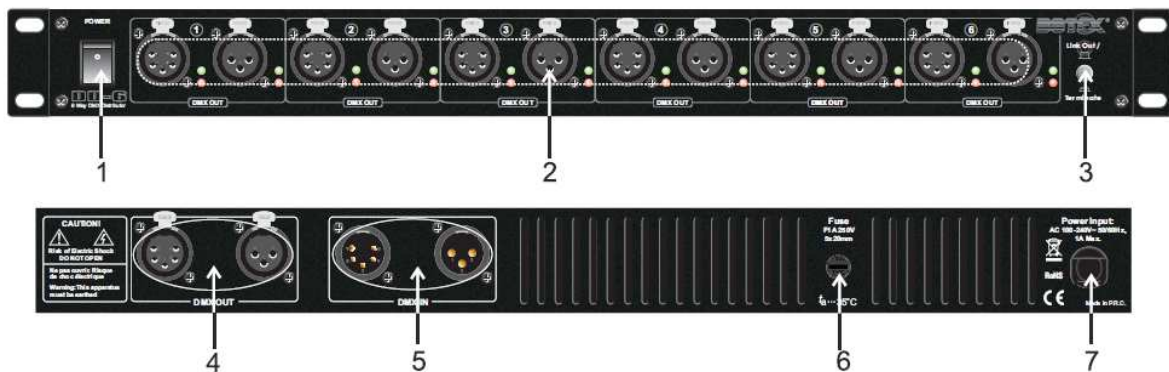

1. Power switch

2. DMX Output

These six DMX output channels are completely electronically isolated and each features an independent driver that boosts the signal.

3. Link Out / Terminate

When the switch is in the „Terminate“ position the DMX Output (4.) is turned off and you cannot link more units. When the switch is in the „Link Out“ position, this unit allows you link a second unit.

4. DMX Output

This connector is used for linking a second DD-6 only.

5. DMX Input

6. Fuse

F1A250V5x20mm

7. Power Input



3. Technical Data

Power supply	
Voltage	230 V AC, 50 Hz
Connections	
Power in	Schutzko
XLR in/out	3pol / 5pol
Controlling	
DMX512	Yes
Hardware	
Dimensions	484 x 146 x 45 mm
Weight	2,1 kg





Importeur:

B & K Braun GmbH

Industriestraße 2

D-76307 Karlsbad

www.bkbraun.com

info@bkbraun.com

