

L2021-40

40 bay tourguide 2020-D charger

FEATURES

- 40 bay charging unit for TourGuide 2020-D receivers
- Quick charging in less than 2,5 hours
- Easy configuration of the receivers by master/slave copy function
- Full software control (channel, language, volume settings)

The L 2021-40 charger rack has been specially designed for stationary applications. It holds up to 40 receivers that will automatically quick-charge to be ready for the next event. At the same time, the L 2021-40 serves as an ethernet interface to allow pre-selecting the active channel for each receiver on a central PC. Up to 125 charger racks with up to 5000 receivers can be connected to the PC. The CC 2021 control software offers simple presets to select and confirm channels for them all with just one click. Users and service staff can easily monitor which receivers at which station have been prepared for any given language or program. Configuration problems are a thing of the past!




ARCHITECT'S SPECIFICATIONS

TECHNICAL DATA

Operating temperature	0 °C ... +40 °C
Mains voltage	100 – 240 V (50 / 60 Hz)
Power consumption	150 W
Voltage.....	5 V per charging slot
Power supply	400 mA per charging slot
Charging time	2,5h (HDE2020-D) / 5h (EK2020-D)
Dimensions	483 mm x 399 mm x 172 mm
Weight	8800 g
Color	Brushed metal
Delivery includes.....	L2021-40 Charging unit CC 2021 Configuration software on CD-Rom

L2021-40 40 bay tourguide 2020-D charger

DIMENSIONS

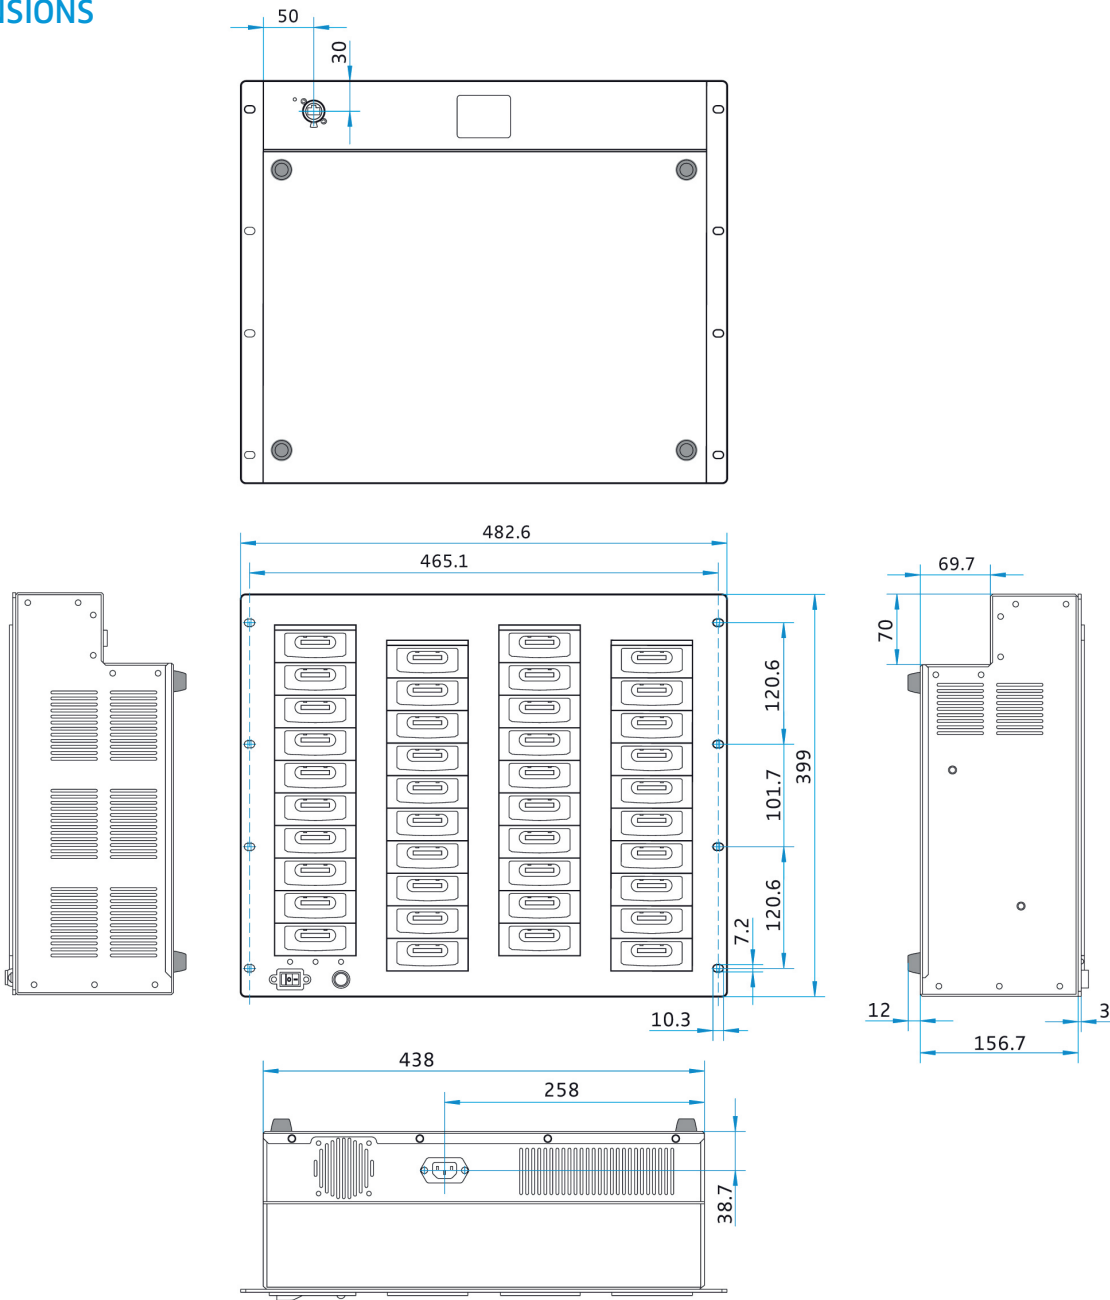

PRODUCT VARIANTS

L 2021-40

Cat. No. 502037

RECOMMENDED ACCESSORIES

Mains cable with EU plug, 1.8 m, black,

Cat. No. 054324

Mains cable with US plug, 1.8 m, black,

Cat. No. 054325

Mains cable with UK plug, 1.8 m, black,

Cat. No. 054327

Sennheiser electronic GmbH & Co. KG
 Am Labor 1, 30900 Wedemark, Germany
 www.sennheiser.com

 **SENNHEISER**