



Harley Benton

HB-80R
guitar combo

Musikhaus Thomann
Thomann GmbH
Hans-Thomann-Straße 1
96138 Burgebrach
Germany
Telephone: +49 (0) 9546 9223-0
E-mail: info@thomann.de
Internet: www.thomann.de

11.03.2019, ID: 152541 (V5)

Table of contents

1	General information	4
	1.1 Further information.....	5
	1.2 Notational conventions.....	6
	1.3 Symbols and signal words.....	6
2	Safety instructions	8
3	Features	13
4	Installation and starting up	14
5	Connections and controls	15
6	Technical specifications	22
7	Plug and connection assignment	25
8	Cleaning	27
9	Protecting the environment	28

1 General information

This user manual contains important information on the safe operation of the device. Read and follow all safety notes and all instructions. Save this manual for future reference. Make sure that it is available to all persons using this device. If you sell the device to another user, be sure that they also receive this manual.

Our products and user manuals are subject to a process of continuous development. We therefore reserve the right to make changes without notice. Please refer to the latest version of the user manual which is ready for download under www.thomann.de.

1.1 Further information

On our website (www.thomann.de) you will find lots of further information and details on the following points:

Download	This manual is also available as PDF file for you to download.
Keyword search	Use the search function in the electronic version to find the topics of interest for you quickly.
Online guides	Our online guides provide detailed information on technical basics and terms.
Personal consultation	For personal consultation please contact our technical hotline.
Service	If you have any problems with the device the customer service will gladly assist you.

1.2 Notational conventions

This manual uses the following notational conventions:

Letterings

The letterings for connectors and controls are marked by square brackets and italics.

Examples: *[VOLUME]* control, *[Mono]* button.

1.3 Symbols and signal words

In this section you will find an overview of the meaning of symbols and signal words that are used in this manual.

Signal word	Meaning
DANGER!	This combination of symbol and signal word indicates an immediate dangerous situation that will result in death or serious injury if it is not avoided.
CAUTION!	This combination of symbol and signal word indicates a possible dangerous situation that can result in minor injury if it is not avoided.
NOTICE!	This combination of symbol and signal word indicates a possible dangerous situation that can result in material and environmental damage if it is not avoided.
Warning signs	Type of danger
	Warning – high-voltage.
	Warning – danger zone.

2 Safety instructions

Intended use

This device is intended to be used for amplification and playback of signals from musical instruments with electromagnetic pickups. Any other use or use under other operating conditions is considered to be improper and may result in personal injury or property damage. No liability will be assumed for damages resulting from improper use.

This device may be used only by persons with sufficient physical, sensorial, and intellectual abilities and having corresponding knowledge and experience. Other persons may use this device only if they are supervised or instructed by a person who is responsible for their safety.

Safety



DANGER!

Danger for children

Ensure that plastic bags, packaging, etc. are disposed of properly and are not within reach of babies and young children. Choking hazard!

Ensure that children do not detach any small parts (e.g. knobs or the like) from the unit. They could swallow the pieces and choke!

Never let children unattended use electrical devices.



DANGER!

Electric shock caused by high voltages inside

Within the device there are areas where high voltages may be present. Never remove any covers.

There are no user-serviceable parts inside.

Do not use the device if covers, protectors or optical components are missing or damaged.



DANGER!

Electric shock caused by short-circuit

Do not modify the mains cable or the plug. Failure to do so could result in electric shock/death or fire. If in doubt, seek advice from a registered electrician.



CAUTION!

Possible hearing damage

The device can produce volume levels that may cause temporary or permanent hearing impairment. Over an extended period of time, even levels that seem to be uncritical can cause hearing damage.

Decrease the volume level immediately if you experience ringing in your ears or hearing impairment. If this is not possible, keep a greater distance or use sufficient ear protectors.



NOTICE!

Risk of fire

Do not block areas of ventilation. Do not install the device near any direct heat source. Keep the device away from naked flames.



NOTICE!

Operating conditions

This device has been designed for indoor use only. To prevent damage, never expose the device to any liquid or moisture. Avoid direct sunlight, heavy dirt, and strong vibrations.



NOTICE!

Power supply

Before connecting the device, ensure that the input voltage (AC outlet) matches the voltage rating of the device and that the AC outlet is protected by a residual current circuit breaker. Failure to do so could result in damage to the device and possibly injure the user.

Unplug the device before electrical storms occur and when it is unused for long periods of time to reduce the risk of electric shock or fire.



NOTICE!

Possible damage due to installation of a wrong fuse

The use of different types of fuses can cause serious damage to the unit. Fire hazard!

Only fuses of the same type may be used.

3 Features

Special features of the device

- Output power 65 watt
- 1 × 12" Celestion speaker
- Two channels (selectable)
- Effects loop
- Built-in reverb effect
- Inputs
 - Aux
 - Footswitch
- Outputs
 - Headphones
 - Speaker
 - Line
- Standby function

4 Installation and starting up

Unpack and check carefully there is no transportation damage before using the unit. Keep the equipment packaging. To fully protect the product against vibration, dust and moisture during transportation or storage use the original packaging or your own packaging material suitable for transport or storage, respectively.

Create all connections while the device is off. Use the shortest possible high-quality cables for all connections. Take care when running the cables to prevent tripping hazards.




NOTICE!

Possible property damage by magnetic fields

Loudspeakers produce a static magnetic field. Therefore, maintain an appropriate distance to devices that can be adversely affected or damaged by an external magnetic field.

5 Connections and controls

Front panel

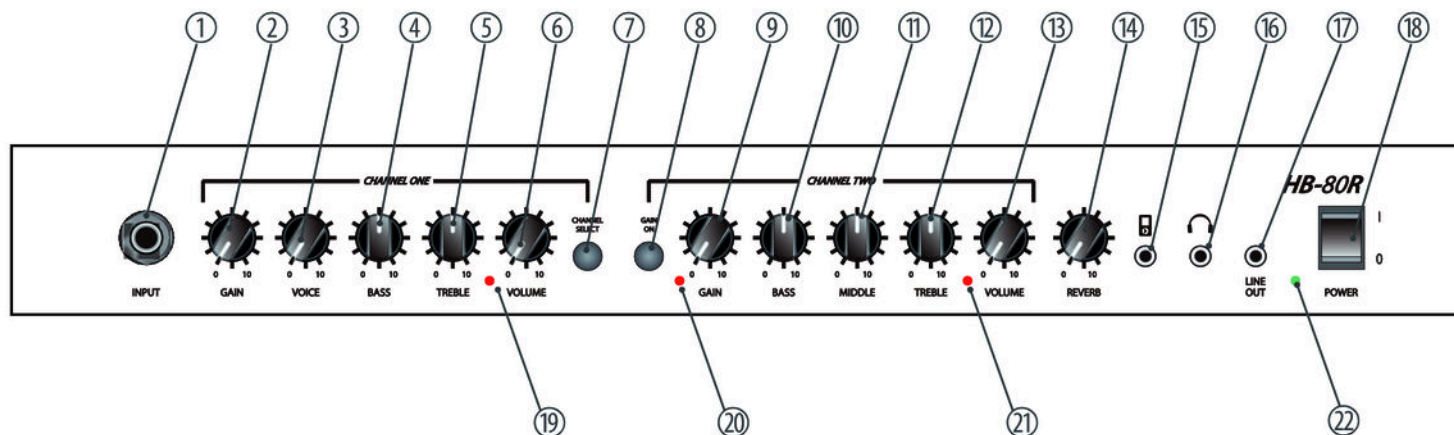

HB-80R

1	<i>[INPUT]</i> 1/4" jack socket to connect your instrument. You can also connect other active signal sources like CD or MP3 players, keyboards, mixers etc. to this input.
2	<i>[GAIN]</i> Control to adjust the preamp gain of the signal in channel 1.
3	<i>[VOICE]</i> Control to adjust the tone colour of the signal in channel 1.
4	<i>[BASS]</i> Control to adjust the low frequency of the signal in channel 1.
5	<i>[TREBLE]</i> Control to adjust the high frequency of the signal in channel 1.
6	<i>[VOLUME]</i> Control to adjust the volume of channel 1.

7	<i>[CHANNEL SELECT]</i> Channel 1 / 2 select switch. The LED of the active channel lights permanently during operation.
8	<i>[GAIN ON]</i> Pressure switch for enabling the preamplifier (gain) in channel 2.
9	<i>[GAIN]</i> Control to adjust the preamp gain of the signal in channel 2.
11	<i>[BASS]</i> Control to adjust the low frequency of the signal in channel 2.
12	<i>[MIDDLE]</i> Control to adjust the mids in channel 2.
13	<i>[VOLUME]</i> Control to adjust the volume of channel 2.
14	<i>[REVERB]</i> Control to adjust the reverb effect (channel 1 and 2).

15	Aux input for connecting an MP3 or CD player (3.5 mm mini phone socket).
16	Headphones output (3.5 mm mini phone socket). When you connect headphones, the internal speakers are automatically muted.
17	<i>[LINE OUT]</i> Output (3.5 mm mini phone socket) for connecting an external amplifier or recording device.
18	<i>[POWER]</i> Mains switch. Turns the device on and off.
19	Status indicator channel 1 This LED lights during operation when channel 1 is activated.
20	Gain indicator This LED lights during operation when the preamp of channel 2 is activated.


21 Status indicator channel 2

This LED lights during operation when channel 2 is activated.

22 Standby indicator

If there is no signal *[INPUT]* at the INPUT jack for 30 minutes, the device will automatically enter standby mode (LED green). As soon as the *[INPUT]* jack receives a signal again, the device automatically switches back to normal mode (LED red).

Rear panel

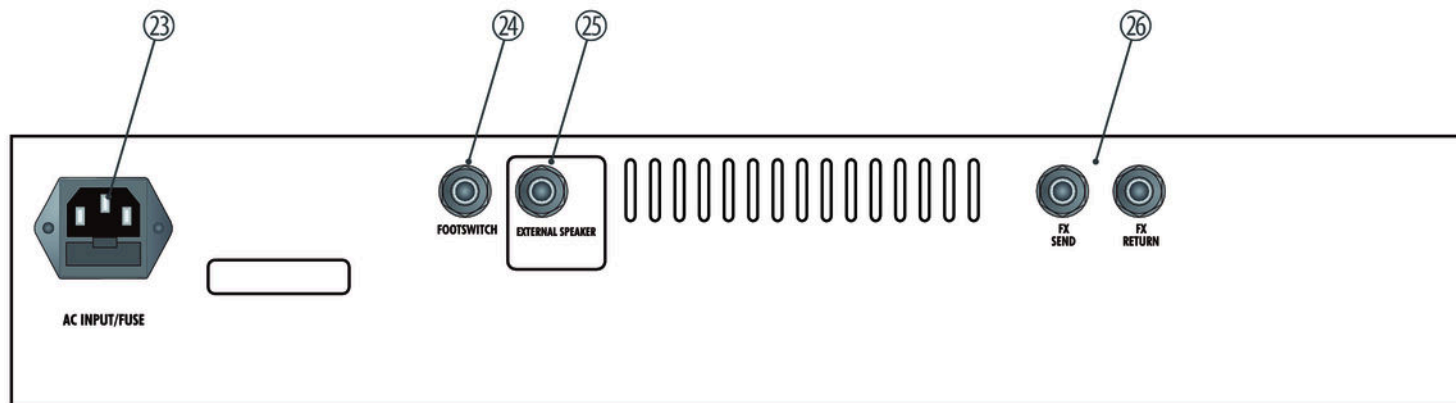

23	Mains chassis plug with fuse holder.
24	<i>[FOOT SWITCH]</i> Foot switch jack (1/4" phone socket).
25	<i>[LOUDSPEAKER]</i> Output jack for connecting an external speaker box (1/4" phone socket). The impedance of the external speaker must be at least 8 Ω .
26	<i>[FX SEND RETURN]</i> In and output jacks for looping in an effects unit (1/4" jack sockets).

6 Technical specifications

Speaker	1 × 12" Celestion speaker	
Input connections	Voltage supply	IEC chassis plug C14
	Instruments	1/4" jack socket
	AUX	3.5 mm phone socket
	Optional foot switch	1/4" jack socket
	Effect device	1/4" jack socket
Output connections	Headphones	3.5 mm phone socket
	External speaker (impedance min. 8 Ω)	1/4" jack socket
	Amplifier or recording device	3.5 mm phone socket
	Effect device	1/4" jack socket
Input impedance	220 kΩ	

Output power	65 W (RMS) @ 4 Ω 40 W (RMS) @ 8 Ω	
Frequency range	50 Hz to 8 kHz	
Signal-to-noise ratio	68 dB	
Total harmonic distortion (THD)	0.6 %	
Power consumption	max. 120 W	
Supply voltage	230 V ~ 50 Hz	
Fuse	5 mm × 20 mm, 1 A, 250 V, slow-blow	
Dimensions (W × H × D)	560 mm × 510 mm × 310 mm	
Weight	15.5 kg	
Ambient conditions	Temperature range	0 °C...40 °C
	Relative humidity	50 %, non-condensing

Further information

Channels	2
Reverb	Yes
Effects processor	No
External effects loop	No
Line input	No
Recording output	Yes
MIDI interface	No
Socket for external speakers	Yes
Headphone connection	Yes
Foot switch socket	Yes
Incl. foot switch	No

7 Plug and connection assignment

Introduction

This chapter will help you select the right cables and plugs to connect your valuable equipment in such a way that a perfect sound experience is ensured.

Please note these advices, because especially in 'Sound & Light' caution is indicated: Even if a plug fits into the socket, an incorrect connection may result in a destroyed power amp, a short circuit or 'just' in poor transmission quality!

Balanced and unbalanced transmission

Unbalanced transmission is mainly used in semi-professional environment and in hifi use. Instrument cables with two conductors (one core plus shielding) are typical representatives of the unbalanced transmission. One conductor is ground and shielding while the signal is transmitted through the core.

Unbalanced transmission is susceptible to electromagnetic interference, especially at low levels, such as microphone signals and when using long cables.

In a professional environment, therefore, the balanced transmission is preferred, because this enables an undisturbed transmission of signals over long distances. In addition to the conductors 'Ground' and 'Signal', in a balanced transmission a second core is added. This also transfers the signal, but phase-shifted by 180°.

Since the interference affects both cores equally, by subtracting the phase-shifted signals, the interfering signal is completely neutralized. The result is a pure signal without any noise interference.

1/4" TS phone plug (mono, unbalanced)



1	Signal
2	Ground, shielding

Three-pole 1/8" mini phone jack (stereo, unbalanced)



1	Signal (left)
2	Signal (right)
3	Ground, shielding

8 Cleaning

Device components

Clean the device components that are accessible from the outside regularly. The cleaning frequency depends on the operating environment: damp, smoky or particularly dirty environments can cause greater accumulation of dirt on the device components.

- Clean with a dry soft cloth.
- Stubborn dirt can be removed with a slightly dampened cloth.
- Never use solvents or alcohol for cleaning.

9 Protecting the environment

Disposal of the packaging material



For the transport and protective packaging, environmentally friendly materials have been chosen that can be supplied to normal recycling.

Ensure that plastic bags, packaging, etc. are properly disposed of.

Do not just dispose of these materials with your normal household waste, but make sure that they are collected for recycling. Please follow the notes and markings on the packaging.

Disposal of your old device



This product is subject to the European Waste Electrical and Electronic Equipment Directive (WEEE) in its currently valid version. Do not dispose with your normal household waste.

Dispose of this device through an approved waste disposal firm or through your local waste facility. When discarding the device, comply with the rules and regulations that apply in your country. If in doubt, consult your local waste disposal facility.

HB-80R



Musikhaus Thomann · Hans-Thomann-Straße 1 · 96138 Burgebrach · Germany · www.thomann.de