Millenium

SLS300 Lighting Stand

Lighting Stand

Thomann GmbH

Hans-Thomann-Straße 1 96138 Burgebrach

Germany

Telephone: +49 (0) 9546 9223-0

Internet: www.thomann.de

02.08.2024, ID: 180075 (V3)

Table of contents

| 1 | General information | 5 |
|---|------------------------------|-----|
| | 1.1 Symbols and signal words | 5 |
| 2 | Safety instructions | 7 |
| 3 | Features | . 9 |
| 4 | Operation | 10 |
| 5 | Technical specifications | 20 |
| 6 | Protecting the environment | 22 |
| | | |



1 General information

This document contains important instructions for the safe operation of the product. Read and follow the safety instructions and all other instructions. Keep the document for future reference. Make sure that it is available to all those using the product. If you sell the product to another user, be sure that they also receive this document.

Our products and documentation are subject to a process of continuous development. They are therefore subject to change. Please refer to the latest version of the documentation, which is ready for download under <u>www.thomann.de</u>.

1.1 Symbols and signal words

In this section you will find an overview of the meaning of symbols and signal words that are used in this document.

| Signal word | Meaning | | |
|---------------|--|--|--|
| DANGER! | This combination of symbol and signal word indicates an immediate dangerous situation that will result in death or serious injury if it is not avoided. | | |
| CAUTION! | This combination of symbol and signal word indicates a possible dangerous situation that can result in minor injury if it is not avoided. | | |
| NOTICE! | This combination of symbol and signal word indicates a possible dangerous situation that can result in material and environmental damage if it is not avoided. | | |
| Warning signs | Type of danger | | |
| \triangle | Warning – danger zone. | | |

2 Safety instructions

Intended use

This light stand is intended to be used for the stable mounting and height-adjustable positioning of spotlights. Use the device only as described in this user manual. Any other use or use under other operating conditions is considered to be improper and may result in personal injury or property damage. No liability will be assumed for damages resulting from improper use.

This device may be used only by persons with sufficient physical, sensorial, and intellectual abilities and having corresponding knowledge and experience. Other persons may use this device only if they are supervised or instructed by a person who is responsible for their safety.

Safety



DANGER!

Risk of injury and choking hazard for children!

Children can suffocate on packaging material and small parts. Children can injure themselves when handling the product. Never allow children to play with the packaging material and the product. Always store packaging material out of the reach of babies and small children. Always dispose of packaging material properly when it is not in use. Never allow children to use the product without supervision. Keep small parts away from children and make sure that the product does not shed any small parts that children could play with.



CAUTION!

Risk of injury due to tipping of the stand during loaded transport!

If the stand is moved without having removed the installed devices, the stand may tip over and cause injuries and property damage. Remove the installed devices before transporting the stand.



CAUTION!

Risk of injury due to tipping of stand on an unsuitable ground!

When the stand is installed on soft or uneven ground, the stand may tip over and cause injuries and property damage. Install the stand only on even and solid ground.



CAUTION!

Risk of injury due to tipping of the stand from excessive loading!

In case of excessive loading, the stand might tip over, causing injury and property damage. Never exceed the specified maximum load for the stand.



CAUTION!

Risk of injury due to tipping of the stand from excessive or one-sided loading of the truss beam.

In case of excessive or one-sided loading of the truss beam the stand might tip over, causing injury and property damage. Never exceed the specified maximum load for the truss beam. Spread the weight of the mounted devices evenly on the truss beam.



NOTICE!

Possible staining due to plasticiser in rubber feet!

The plasticiser contained in the rubber feet of this product may react with the coating of the floor and cause permanent dark stains after some time. If necessary, use a suitable mat or felt slide to prevent direct contact between the device's rubber feet and the floor.

3 Features

Special characteristics:

- Ideal for mobile discos and solo entertainers
- Quick and easy to assemble
- 3 m wide truss
- Can be extended up to a height of 2.65 m
- Maximum load capacity of the entire system: 25 kg
- Maximum load capacity per stand: 18 kg
- C hook (item no. 145665) and clamps (item no. 481567) for attaching lamps to the truss beam are available as options

4 Operation

Unpack and check carefully there is no transportation damage before using the product. Keep the equipment packaging. To fully protect the product against vibration, dust and moisture during transportation or storage use the original packaging or your own packaging material suitable for transport or storage, respectively.



CAUTION!

Risk of injury due to tipping of the stand during loaded transport!

If the stand is moved without having removed the installed devices, the stand may tip over and cause injuries and property damage.

Remove the installed devices before transporting the stand.



CAUTION!

Risk of injury due to tipping of stand on an unsuitable ground!

When the stand is installed on soft or uneven ground, the stand may tip over and cause injuries and property damage.

Install the stand only on even and solid ground.



CAUTION!

Risk of injury due to tipping of the stand from excessive loading!

In case of excessive loading, the stand might tip over, causing injury and property damage.

Never exceed the specified maximum load for the stand.



CAUTION!

Risk of injury due to tipping of the stand from excessive or one-sided loading of the truss beam.

In case of excessive or one-sided loading of the truss beam the stand might tip over, causing injury and property damage.

Never exceed the specified maximum load for the truss beam.

Spread the weight of the mounted devices evenly on the truss beam.



NOTICE!

Possible staining due to plasticiser in rubber feet!

The plasticiser contained in the rubber feet of this product may react with the coating of the floor and cause permanent dark stains after some time.

If necessary, use a suitable mat or felt slide to prevent direct contact between the device's rubber feet and the floor.




Comply with regulations

When installing and operating, make sure to follow the standards and regulations that apply in your country.

Scope of delivery


Before assembling the lighting stand, check that all the items on the following list have been delivered:

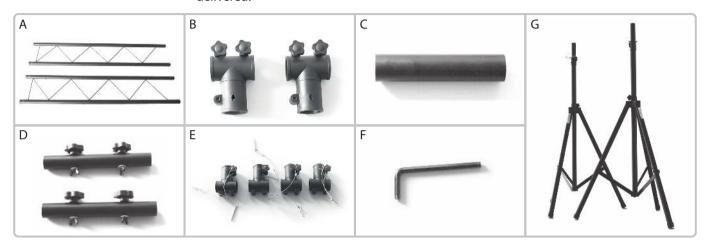

| Item | Quantity | Name | Item | Quantity | Name |
|------|----------|--------------------------|------|----------|-------------------|
| Α | 2 | Truss section | E | 4 | T-piece with bolt |
| В | 2 | T-piece without bolt | F | 1 | Allen key |
| C | 1 | Pipe without screw joint | G | 2 | Stand |
| D | 2 | Pipe with screw joint | | | |

Operation

Setup



In principle, you can perform the following steps on your own. However, the work will be much easier with the assistance of a second person.


1. Remove the rubber caps from the ends of the truss sections (A).




2. Attach the two T-pieces (B) to the ends of tube (C).



Connect the combination of (B) and (C) to the open side of one truss section (A). Then slide the tubes (D) through the T-pieces (B) into the truss section (A) and screw-connect the tubes (D).



4. Attach the second truss section to the open end and screw-connect it.



5. Attach the T-pieces (E) to the outer ends of the two truss sections (A).



6. Secure the T-pieces (E) with the safety bolts.



- **7.** Unfold the feet of the stand (G) until the cross braces are in a horizontal position.
- Secure this position with the safety screw on the carriage to which the three feet are attached.
- **9.** Pull out the safety bolt and loosen the safety screw on the extension tube.
- Pull out the extension tube to the desired height, insert the safety bolt through the appropriate grid hole and slide the safety cotter through the hole in the safety bolt.
- 11. Fix the position of the extension tube with the safety screw on the extension tube.



- 12. Put the truss with the T-pieces onto the extension tube of the stands and attach the truss to the T-pieces (E) with the Allen screws.
- **13.** Attach the headlight or headlights to the truss, with adapters if necessary. Observe the instructions of the respective manufacturers. The maximum load capacity of the truss of 25 kg (18 kg per stand) must not be exceeded.

Disassembly

- **1.** Remove the spotlight(s).
- **2.** Loosen the Allen screws on the T-pieces (E) at the ends of the truss and pull the truss off the stands.
- 3. To disassemble the truss, follow the assembly instructions in reverse order; only disassemble it to the level you feel is required for transport or storage, as you will be setting it up again.
- Pull out the safety bolt on the stand and hold the extension tube while you loosen the safety screw on the extension tube.
- Slide the extension tube all the way down and slide the safety bolt through the corresponding grid hole.
- **6.** Fix the extension tube in place by means of the safety screw on the extension tube.
- **7.** Loosen the safety screw on the carriage to which the three feet are attached.
- **8.** Fold up the feet of the stand.
- **9.** Pack the individual parts of the system in their original packaging if possible, and store the package in a dry place protected against moisture.

Technical specifications 5

| Height, max. | 2.65 m | | |
|--|--|--|--|
| Total width of assembly | 3.00 m | | |
| Adjustable stand height | 1.20 m 2.65 m | | |
| Stand footprint | ∅ 1.34 m | | |
| Length of individual truss | 2×1.50 m, optionally extensible to 4.50 m max. | | |
| Stand tube diameter | Ø 38 mm | | |
| Truss tube diameter | Ø 38 mm | | |
| Pipe spacing, truss (outside) | 27 cm | | |
| Mount type | C hook (item no. 145665) and clamps (item no. 481567) for attaching lamps to the truss beam are available as options | | |
| Total system load, max. | 25 kg | | |
| Load capacity per stand, max. | 18 kg | | |
| Transport dimensions (W \times H \times D) | 320 mm × 1,510 mm × 100 mm | | |
| Weight | 12 kg | | |
| Colour | Black | | |

Further information

| Туре | Truss set |
|----------------------|------------------|
| Components | Telescopic stand |
| Including Truss beam | Yes |
| Crank | No |

6 **Protecting the environment**

Disposal of the packing material



Environmentally friendly materials have been chosen for the packaging. These materials can be sent for normal recycling. Ensure that plastic bags, packaging, etc. are disposed of in the proper manner.

Do not dispose of these materials with your normal household waste, but make sure that they are collected for recycling. Please follow the instructions and markings on the packaging.



Observe the disposal note regarding documentation in France.