


Measurement protocol

th.mann

Test object: Stairville
Tri Flat PAR Profile 5x3W 25°
Item 309298 / @ 1 m / all

Measurement file: 309298_1m_all.CSV
Date of measurement: 01.08.2018
Time of measurement: 12:35:11

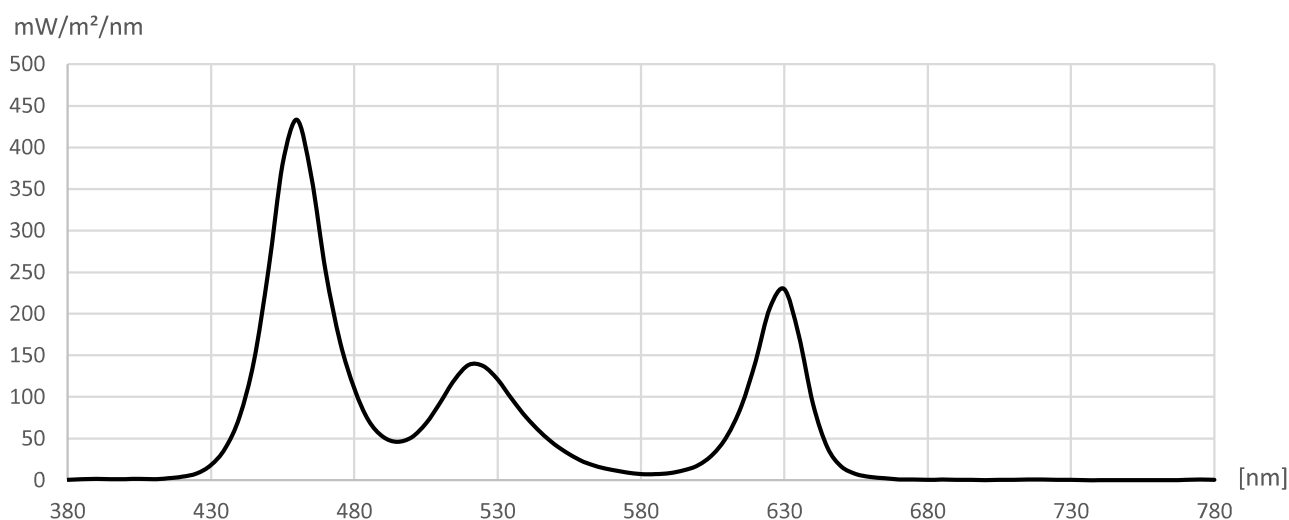

R1 = -	Ra = -	Illuminance	4704,32 lx	CIE1931
R2 = -	Re = -	Ee	23,392 W/m ²	x = 0,2428
R3 = -	GAI = -	LER	201,1 lm/W	y = 0,2075
R4 = -				
R5 = -		correlated color temperature (CCT)	> 50000 K	CIE1976
R6 = -		Duv	-	u' = 0,1941
R7 = -				v' = 0,3731
R8 = -		Saturation	44,6 %	
R9 = -				CIE1960
R10 = -		Dominant wavelength	462 nm	u = 0,1941
R11 = -		Peak wavelength	458 nm	v = 0,2488
R12 = -				
R13 = -		Flicker frequency	% < 2.5 Hz	TM30
R14 = -		Percent Flicker	< 2.5 %	Rf = -
R15 = -		Flicker index	% < 2.5	Rg = -

[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm
380	0,57	440	76,53	500	51,71	560	22,14	620	143,42	680	0,60	740	0,00
385	1,09	445	143,72	505	68,48	565	16,40	625	207,23	685	0,70	745	0,10
390	1,60	450	252,29	510	93,69	570	12,55	630	229,64	690	0,65	750	0,26
395	1,14	455	379,43	515	120,80	575	9,53	635	174,77	695	0,41	755	0,22
400	1,41	460	433,26	520	138,65	580	7,55	640	91,62	700	0,20	760	0,12
405	1,76	465	365,36	525	137,08	585	7,27	645	39,42	705	0,37	765	0,24
410	1,26	470	250,83	530	120,91	590	8,72	650	16,43	710	0,49	770	0,34
415	2,27	475	166,55	535	97,13	595	11,88	655	7,58	715	0,91	775	0,79
420	4,27	480	109,77	540	75,86	600	18,06	660	3,94	720	0,80	780	0,68
425	8,16	485	71,83	545	57,58	605	30,95	665	2,38	725	0,63		
430	18,03	490	52,20	550	42,79	610	52,97	670	1,07	730	0,50		
435	38,38	495	46,24	555	31,29	615	89,13	675	0,78	735	0,00		

Thomann GmbH
Hans-Thomann-Str. 1
D-96138 Burgebrach, Germany

Sebastian Laske

Burgebrach, 01.08.2018







First, last name of inspector

Measurement protocol

th•mann

Test object: Stairville
Tri Flat PAR Profile 5x3W 25°
Item 309298 / @ 1 m / all

Measurement file: 309298_1m_all.CS'
Date of measurement: 01.08.2018
Time of measurement: 12:35:11

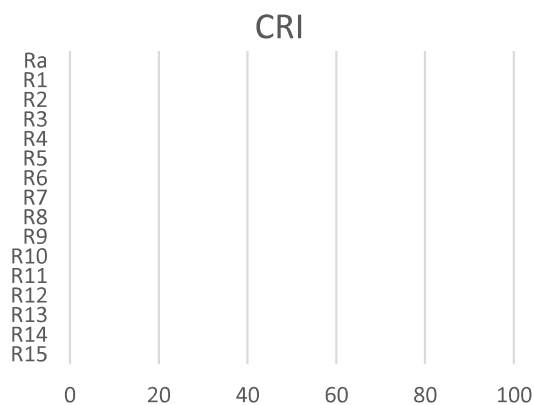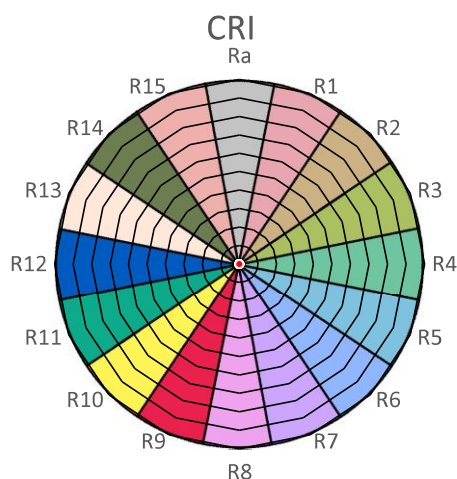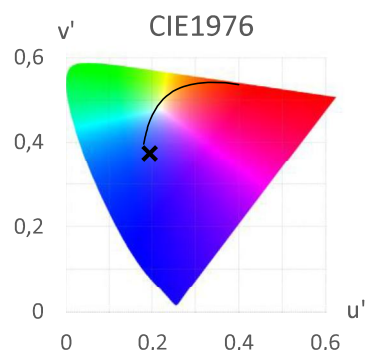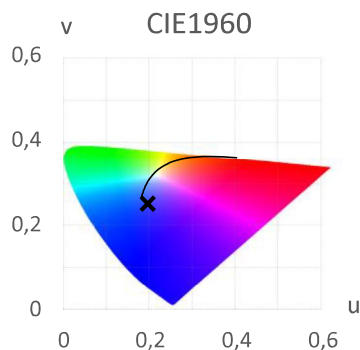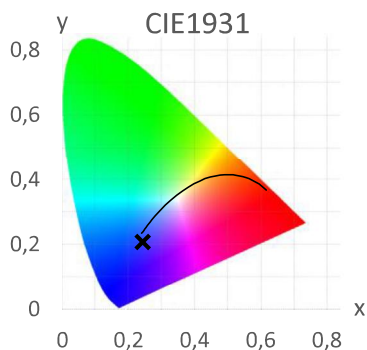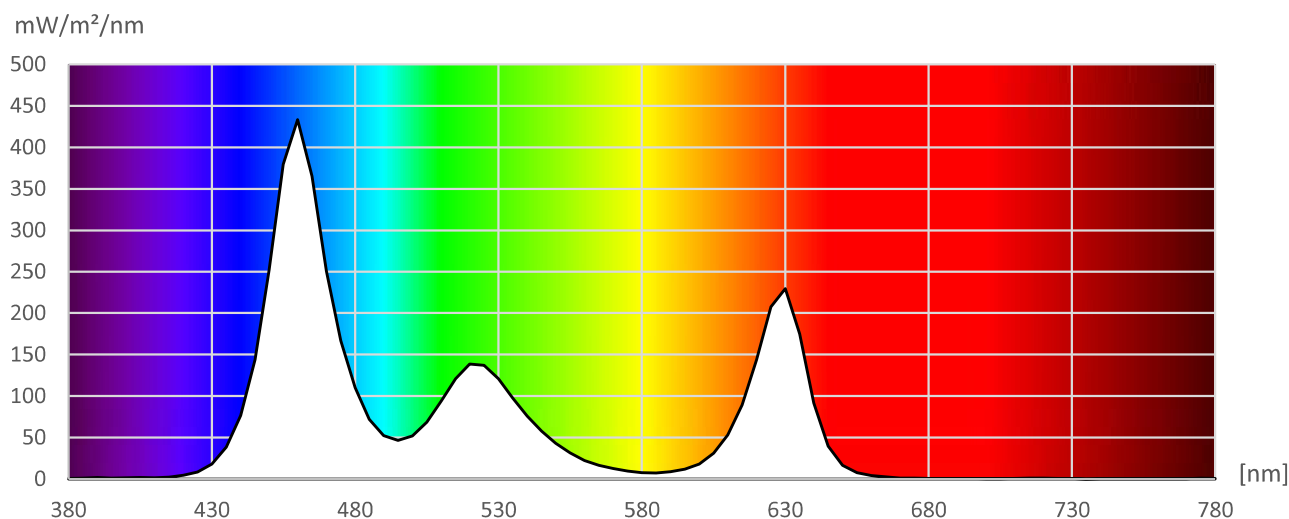

Thomann GmbH
Hans-Thomann-Str. 1
D-96138 Burgebrach, Germany

Burgebrach, 01.08.2018

Sebastian Laske


First, last name of inspector

Measurement protocol

th.mann

Test object: Stairville
Tri Flat PAR Profile 5x3W 25°
Item 309298 / @ 3 m / all

Measurement file: 309298_3m_all.CSV
Date of measurement: 01.08.2018
Time of measurement: 12:35:22

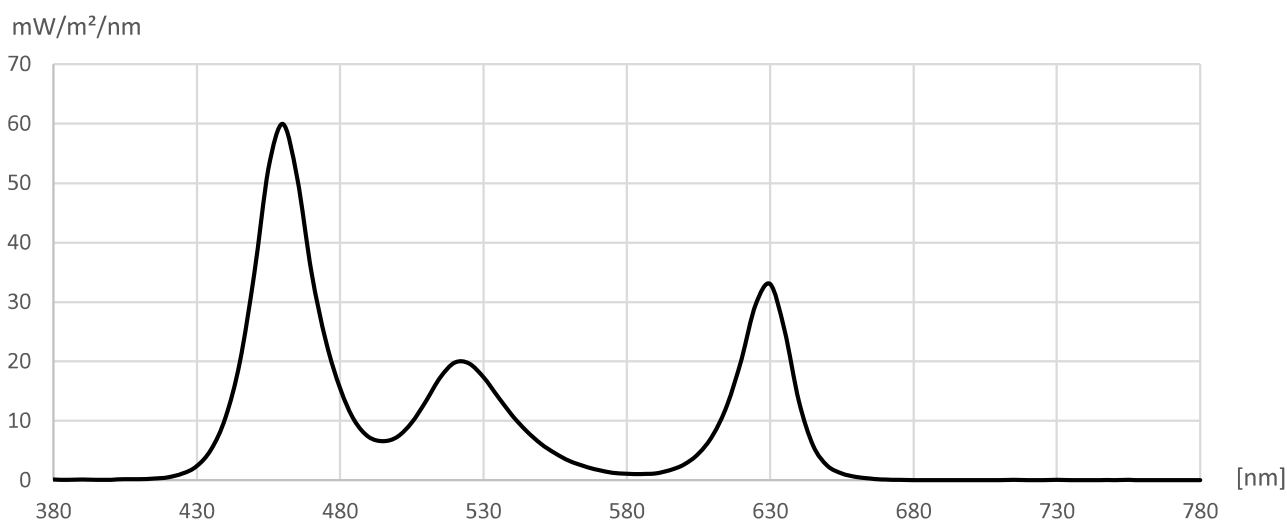

R1 = -	Ra = -	Illuminance	672,09 lx	CIE1931
R2 = -	Re = -	Ee	3,292 W/m ²	x = 0,2451
R3 = -	GAI = -	LER	204,2 lm/W	y = 0,2114
R4 = -				
R5 = -		correlated color temperature (CCT)	> 50000 K	CIE1976
R6 = -		Duv	-	u' = 0,1942
R7 = -				v' = 0,3770
R8 = -		Saturation	43,5 %	
R9 = -				CIE1960
R10 = -		Dominant wavelength	463 nm	u = 0,1942
R11 = -		Peak wavelength	458 nm	v = 0,2513
R12 = -				
R13 = -		Flicker frequency	% < 2.5 Hz	TM30
R14 = -		Percent Flicker	< 2.5 %	Rf = -
R15 = -		Flicker index	% < 2.5	Rg = -

[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm
380	0,11	440	10,53	500	7,34	560	3,22	620	20,41	680	0,01	740	0,00
385	0,06	445	19,91	505	9,75	565	2,38	625	29,57	685	0,00	745	0,04
390	0,14	450	34,74	510	13,38	570	1,73	630	33,02	690	0,02	750	0,04
395	0,07	455	52,37	515	17,33	575	1,27	635	25,27	695	0,02	755	0,05
400	0,10	460	59,94	520	19,81	580	1,09	640	13,29	700	0,01	760	0,00
405	0,19	465	50,95	525	19,65	585	1,06	645	5,79	705	0,02	765	0,02
410	0,17	470	34,94	530	17,33	590	1,15	650	2,46	710	0,03	770	0,01
415	0,28	475	23,39	535	14,04	595	1,70	655	1,15	715	0,07	775	0,01
420	0,50	480	15,37	540	10,94	600	2,65	660	0,57	720	0,03	780	0,00
425	1,12	485	10,08	545	8,30	605	4,46	665	0,27	725	0,01		
430	2,37	490	7,30	550	6,15	610	7,58	670	0,11	730	0,06		
435	5,17	495	6,59	555	4,51	615	12,71	675	0,08	735	0,03		

Thomann GmbH
Hans-Thomann-Str. 1
D-96138 Burgebrach, Germany

Sebastian Laske

Burgebrach, 01.08.2018







First, last name of inspector

Measurement protocol

th•mann

Test object: Stairville
Tri Flat PAR Profile 5x3W 25°
Item 309298 / @ 3 m / all

Measurement file: 309298_3m_all.CS'
Date of measurement: 01.08.2018
Time of measurement: 12:35:22

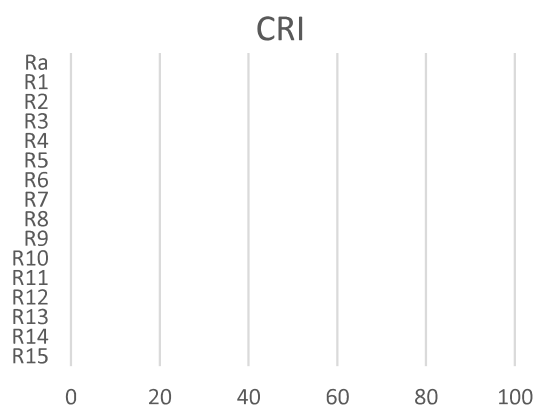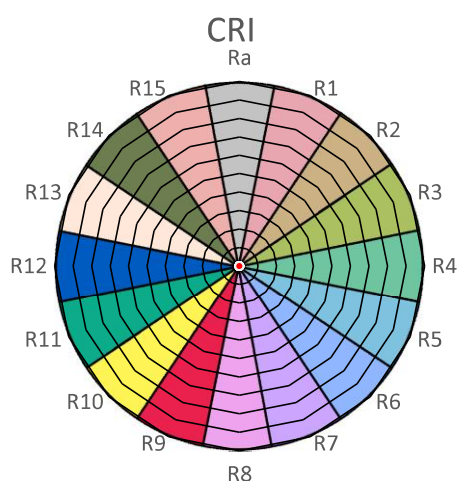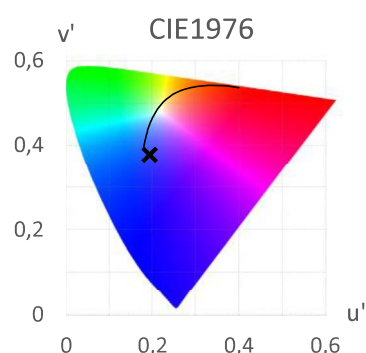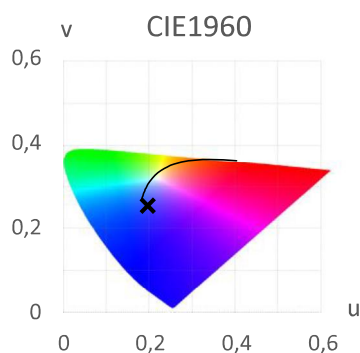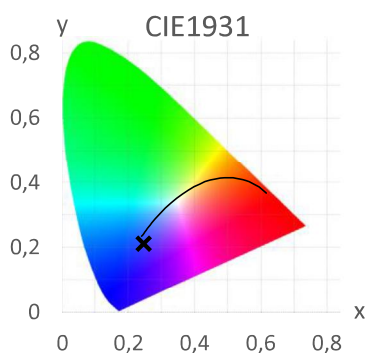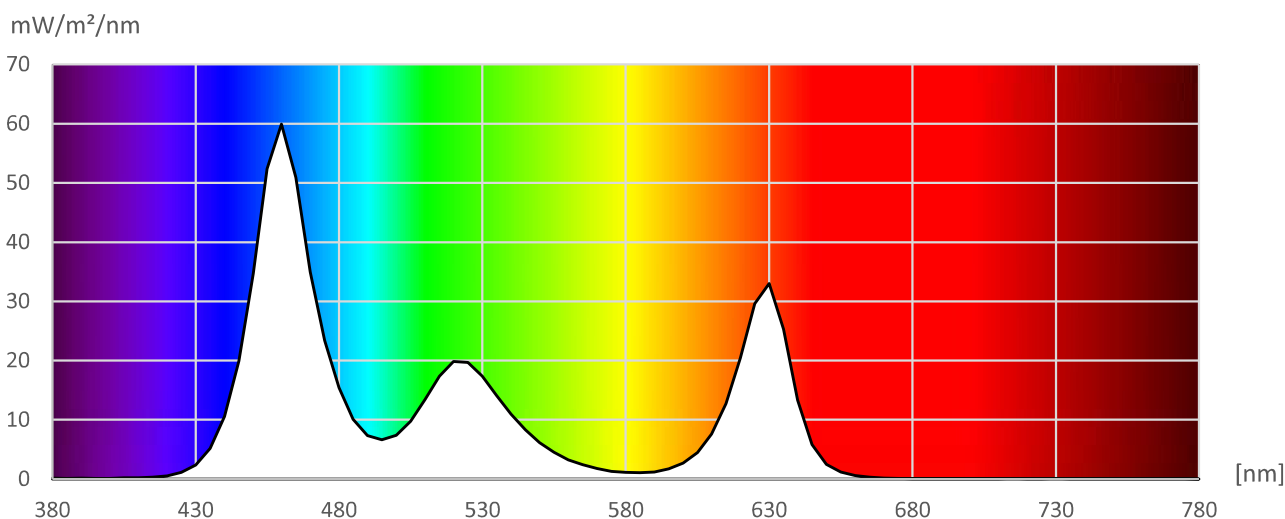

Thomann GmbH
Hans-Thomann-Str. 1
D-96138 Burgebrach, Germany

Burgebrach, 01.08.2018

Sebastian Laske


First, last name of inspector

Measurement protocol

th.mann

Test object: Stairville
Tri Flat PAR Profile 5x3W 25°
Item 309298 / @ 1 m / red

Measurement file: 309298_1m_r.CSV
Date of measurement: 01.08.2018
Time of measurement: 12:35:40

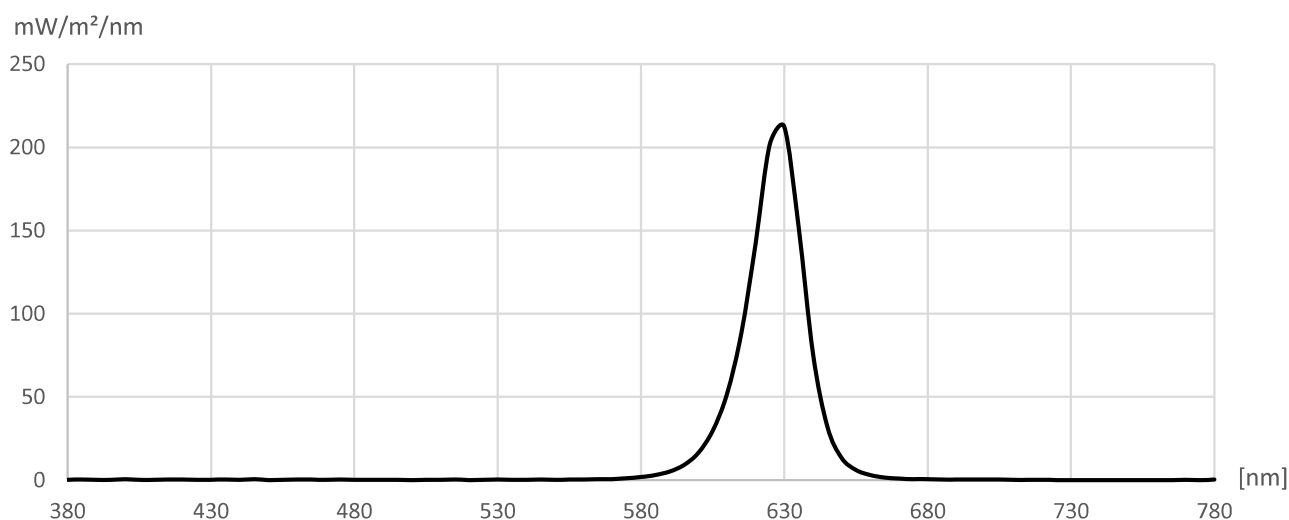

R1 = -	Ra = -	Illuminance	1170,47 lx	CIE1931
R2 = -	Re = -	Ee	5,343 W/m ²	x = 0,6832
R3 = -	GAI = -	LER	219,1 lm/W	y = 0,3103
R4 = -				
R5 = -		correlated color temperature (CCT)	< 1600 K	CIE1976
R6 = -		Duv	-	u' = 0,5101
R7 = -				v' = 0,5213
R8 = -		Saturation	98,3 %	
R9 = -				CIE1960
R10 = -		Dominant wavelength	623 nm	u = 0,5101
R11 = -		Peak wavelength	628 nm	v = 0,3475
R12 = -				
R13 = -		Flicker frequency	% < 2.5 Hz	TM30
R14 = -		Percent Flicker	< 2.5 %	Rf = -
R15 = -		Flicker index	% < 2.5	Rg = -

[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm
380	0,31	440	0,25	500	0,14	560	0,49	620	142,92	680	0,70	740	0,13
385	0,48	445	0,62	505	0,32	565	0,61	625	201,94	685	0,39	745	0,01
390	0,24	450	0,12	510	0,33	570	0,71	630	212,40	690	0,38	750	0,12
395	0,20	455	0,23	515	0,44	575	1,19	635	152,09	695	0,52	755	0,06
400	0,59	460	0,47	520	0,14	580	1,92	640	75,81	700	0,37	760	0,00
405	0,26	465	0,35	525	0,23	585	3,19	645	32,09	705	0,49	765	0,06
410	0,17	470	0,25	530	0,37	590	5,29	650	13,45	710	0,17	770	0,27
415	0,43	475	0,47	535	0,22	595	9,16	655	6,14	715	0,21	775	0,07
420	0,39	480	0,28	540	0,29	600	16,33	660	3,11	720	0,17	780	0,38
425	0,25	485	0,17	545	0,46	605	29,72	665	1,61	725	0,16		
430	0,34	490	0,30	550	0,32	610	51,92	670	0,96	730	0,12		
435	0,39	495	0,26	555	0,37	615	88,62	675	0,60	735	0,06		

Thomann GmbH
Hans-Thomann-Str. 1
D-96138 Burgebrach, Germany

Sebastian Laske

Burgebrach, 01.08.2018







First, last name of inspector

Measurement protocol

th•mann

Test object: Stairville
Tri Flat PAR Profile 5x3W 25°
Item 309298 / @ 1 m / red

Measurement file: 309298_1m_r.CSV
Date of measurement: 01.08.2018
Time of measurement: 12:35:40

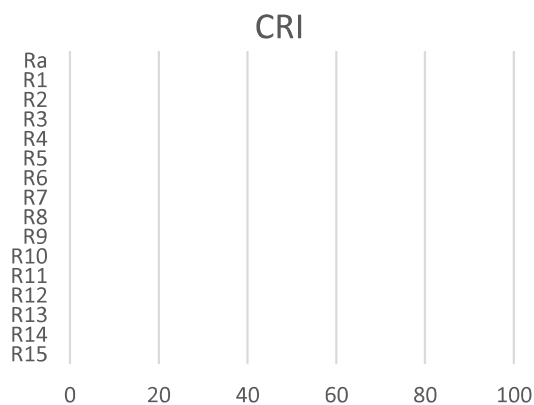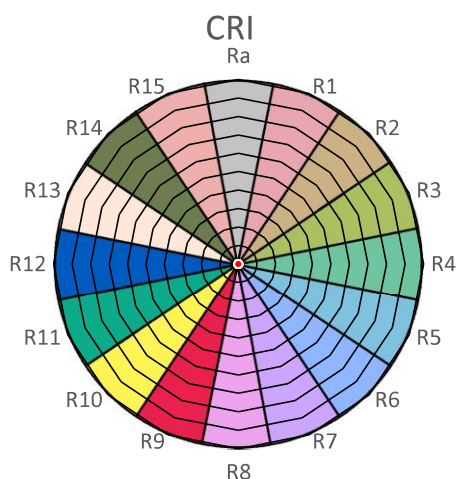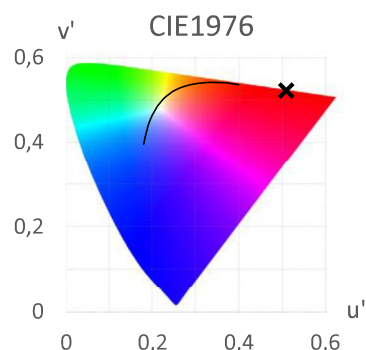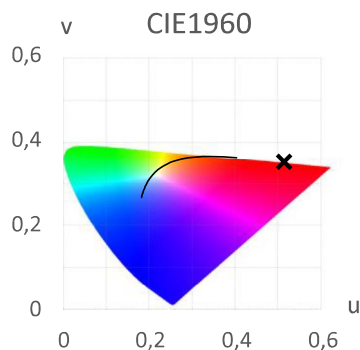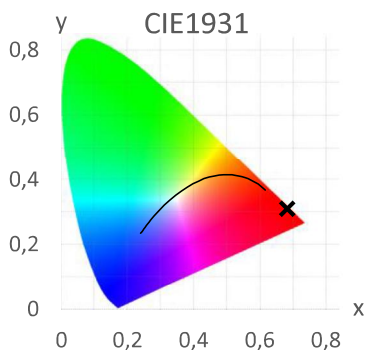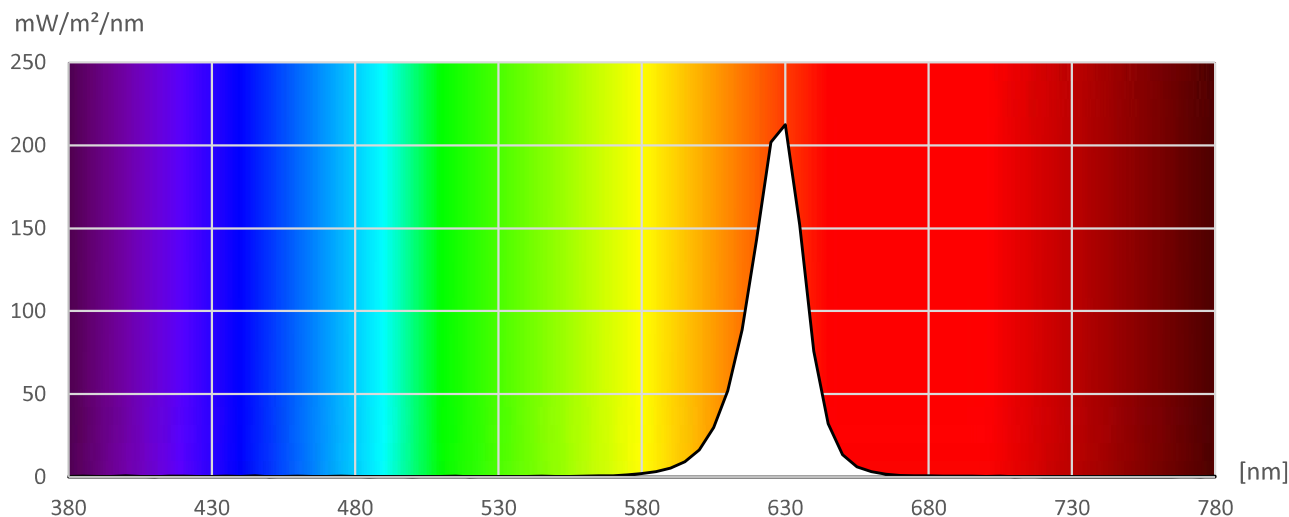

Thomann GmbH
Hans-Thomann-Str. 1
D-96138 Burgebrach, Germany

Burgebrach, 01.08.2018

Sebastian Laske


First, last name of inspector

Measurement protocol

th.mann

Test object: Stairville
Tri Flat PAR Profile 5x3W 25°
Item 309298 / @ 3 m / red

Measurement file: 309298_3m_r.CSV
Date of measurement: 01.08.2018
Time of measurement: 12:35:48

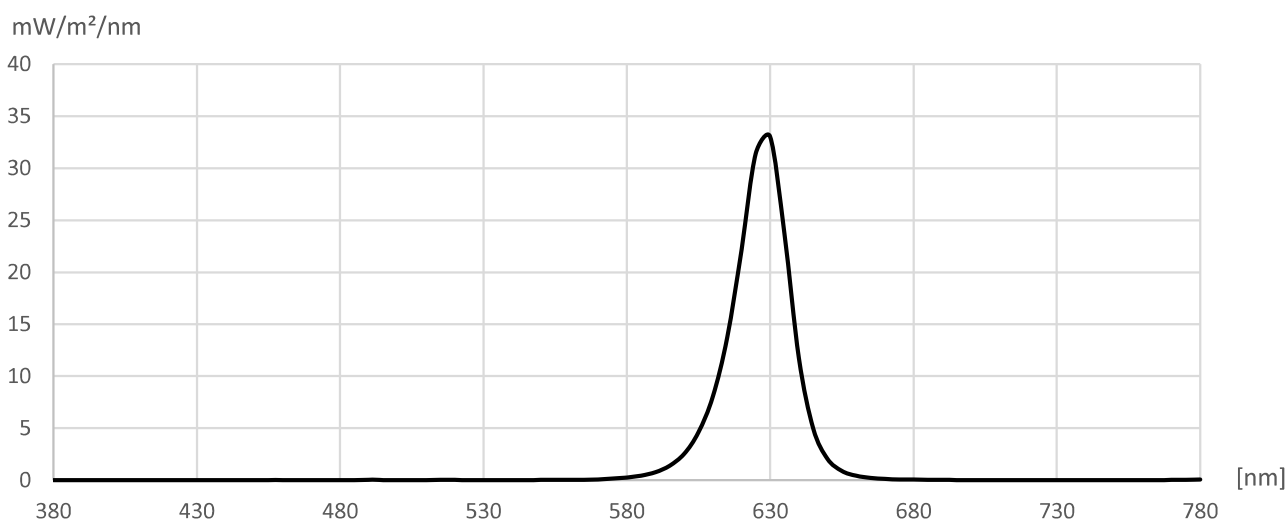

R1 = -	Ra = -	Illuminance	179,78 lx	CIE1931
R2 = -	Re = -	Ee	0,819 W/m²	x = 0,6882
R3 = -	GAI = -	LER	219,6 lm/W	y = 0,3104
R4 = -				
R5 = -		correlated color temperature (CCT)	< 1600 K	CIE1976
R6 = -		Duv	-	u' = 0,5146
R7 = -				v' = 0,5223
R8 = -		Saturation	99,7 %	
R9 = -				CIE1960
R10 = -		Dominant wavelength	623 nm	u = 0,5146
R11 = -		Peak wavelength	628 nm	v = 0,3482
R12 = -				
R13 = -		Flicker frequency	% < 2.5 Hz	TM30
R14 = -		Percent Flicker	< 2.5 %	Rf = -
R15 = -		Flicker index	% < 2.5	Rg = -

[nm]	mW/m²/nm	[nm]	mW/m²/nm	[nm]	mW/m²/nm	[nm]	mW/m²/nm	[nm]	mW/m²/nm	[nm]	mW/m²/nm	[nm]	mW/m²/nm
380	0,00	440	0,01	500	0,01	560	0,05	620	22,19	680	0,08	740	0,00
385	0,01	445	0,02	505	0,00	565	0,03	625	31,41	685	0,03	745	0,00
390	0,02	450	0,00	510	0,00	570	0,08	630	33,03	690	0,04	750	0,00
395	0,01	455	0,02	515	0,03	575	0,16	635	23,68	695	0,02	755	0,01
400	0,01	460	0,02	520	0,03	580	0,27	640	11,75	700	0,00	760	0,00
405	0,01	465	0,00	525	0,01	585	0,45	645	4,96	705	0,00	765	0,02
410	0,00	470	0,00	530	0,01	590	0,78	650	2,05	710	0,00	770	0,03
415	0,00	475	0,00	535	0,02	595	1,40	655	0,89	715	0,00	775	0,04
420	0,00	480	0,02	540	0,00	600	2,53	660	0,43	720	0,00	780	0,06
425	0,01	485	0,00	545	0,01	605	4,61	665	0,23	725	0,00		
430	0,00	490	0,05	550	0,03	610	8,05	670	0,13	730	0,00		
435	0,00	495	0,02	555	0,04	615	13,73	675	0,08	735	0,00		

Thomann GmbH
Hans-Thomann-Str. 1
D-96138 Burgebrach, Germany

Sebastian Laske

Burgebrach, 01.08.2018







First, last name of inspector

Measurement protocol

th•mann

Test object: Stairville
Tri Flat PAR Profile 5x3W 25°
Item 309298 / @ 3 m / red

Measurement file: 309298_3m_r.CSV
Date of measurement: 01.08.2018
Time of measurement: 12:35:48

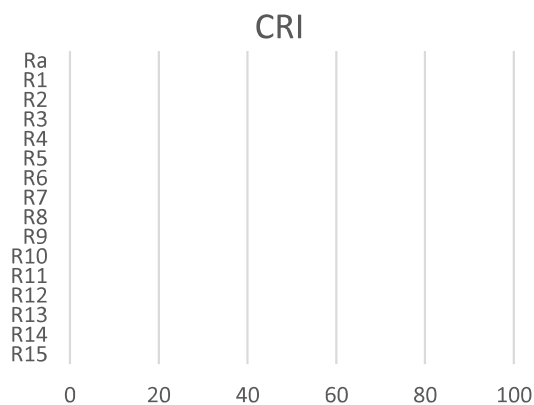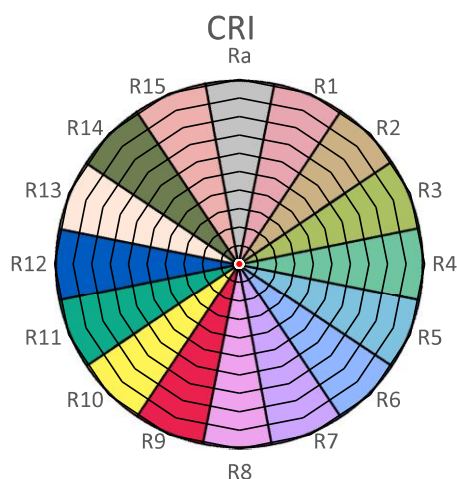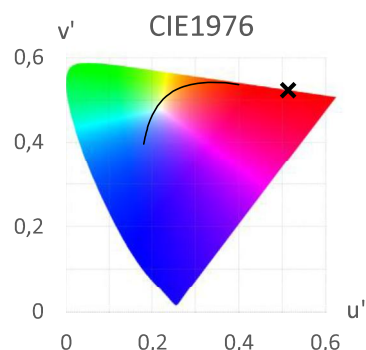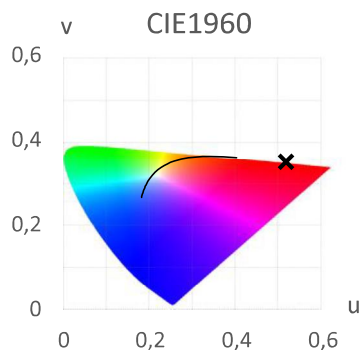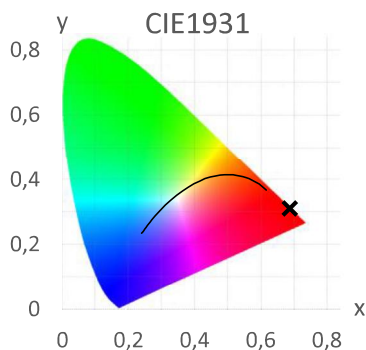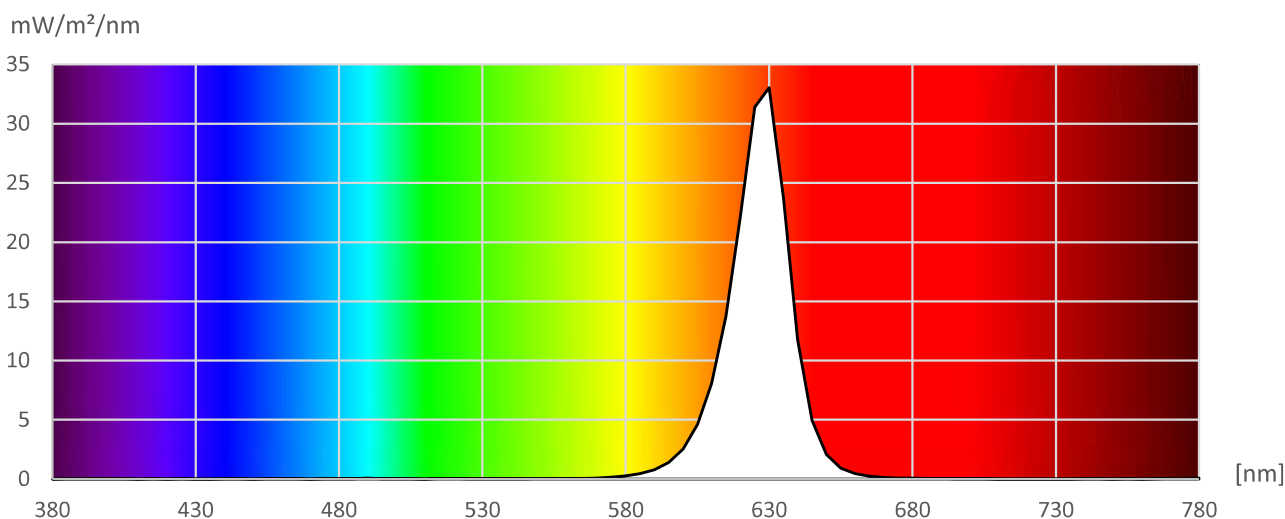

Thomann GmbH
Hans-Thomann-Str. 1
D-96138 Burgebrach, Germany

Burgebrach, 01.08.2018

Sebastian Laske


First, last name of inspector

Measurement protocol

th.mann

Test object: Stairville
Tri Flat PAR Profile 5x3W 25°
Item 309298 / @ 1 m / green

Measurement file: 309298_1m_g.CSV
Date of measurement: 01.08.2018
Time of measurement: 12:36:07

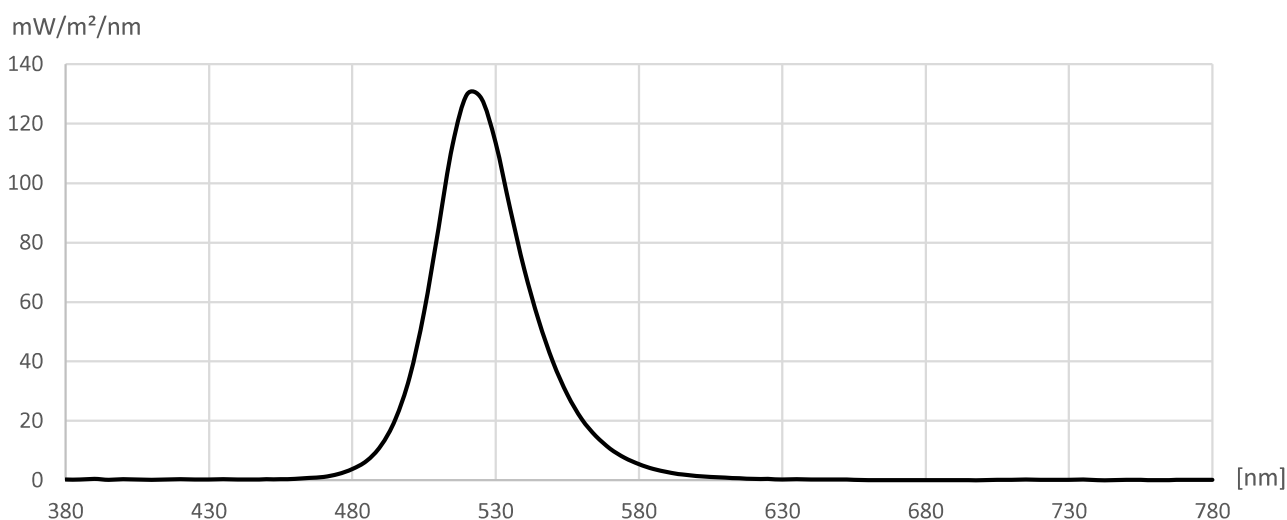

R1 = -35,0	Ra = -21,8
R2 = -6,1	Re = -52,8
R3 = -16,2	GAI = 0,7
R4 = -61,5	
R5 = -9,4	
R6 = -12,8	
R7 = -2,3	
R8 = -31,5	
R9 = #####	
R10 = #####	
R11 = -91,6	
R12 = -29,4	
R13 = -39,5	
R14 = 42,1	
R15 = -39,3	

Illuminance	2693,09 lx
Ee	5,365 W/m ²
LER	502,0 lm/W
correlated color temperature (CCT)	7648 K
Duv	0,1544
Saturation	79,2 %
Dominant wavelength	526 nm
Peak wavelength	522 nm
Flicker frequency	% < 2.5 Hz
Percent Flicker	< 2.5 %
Flicker index	% < 2.5

CIE1931
x = 0,1812
y = 0,7230
CIE1976
u' = 0,0640
v' = 0,5751
CIE1960
u = 0,0640
v = 0,3834
TM30
Rf = 1,0
Rg = 9,7

[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm
380	0,28	440	0,24	500	34,78	560	20,57	620	0,44	680	0,01	740	0,00
385	0,20	445	0,27	505	56,53	565	14,87	625	0,42	685	0,04	745	0,03
390	0,45	450	0,31	510	84,67	570	10,59	630	0,27	690	0,05	750	0,12
395	0,17	455	0,31	515	112,86	575	7,52	635	0,32	695	0,00	755	0,10
400	0,35	460	0,45	520	129,80	580	5,41	640	0,27	700	0,00	760	0,00
405	0,26	465	0,76	525	128,52	585	3,78	645	0,27	705	0,14	765	0,07
410	0,15	470	1,09	530	113,42	590	2,75	650	0,22	710	0,11	770	0,14
415	0,24	475	2,07	535	91,46	595	1,92	655	0,17	715	0,24	775	0,13
420	0,35	480	3,82	540	71,11	600	1,47	660	0,05	720	0,15	780	0,19
425	0,24	485	6,50	545	53,84	605	1,11	665	0,06	725	0,15		
430	0,29	490	11,62	550	39,82	610	0,92	670	0,01	730	0,11		
435	0,34	495	20,48	555	28,83	615	0,64	675	0,01	735	0,23		

Thomann GmbH
Hans-Thomann-Str. 1
D-96138 Burgebrach, Germany

Sebastian Laske

Burgebrach, 01.08.2018







First, last name of inspector

Measurement protocol

th•mann

Test object: Stairville
Tri Flat PAR Profile 5x3W 25°
Item 309298 / @ 1 m / green

Measurement file: 309298_1m_g.CSV
Date of measurement: 01.08.2018
Time of measurement: 12:36:07

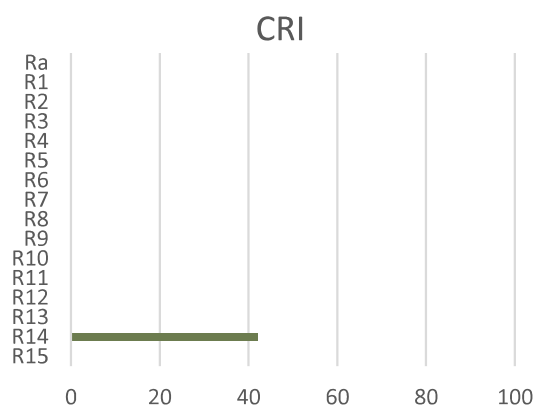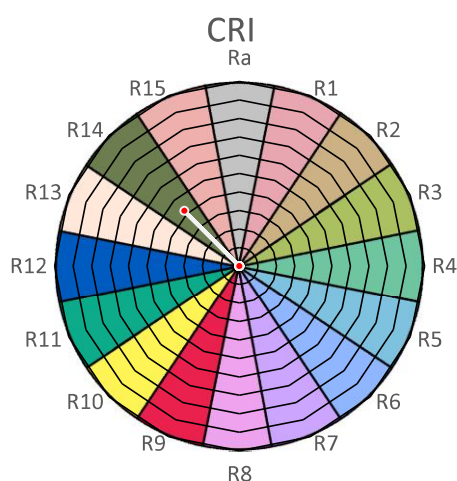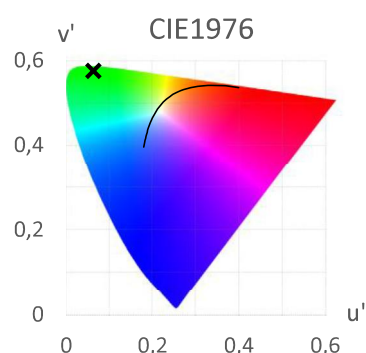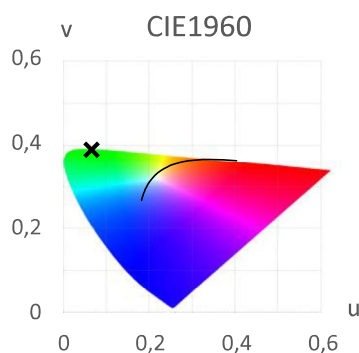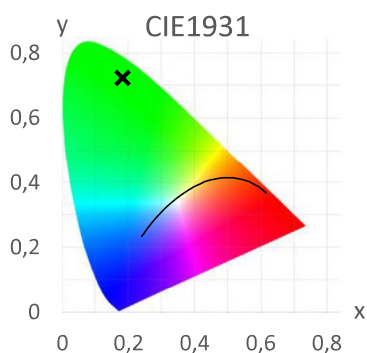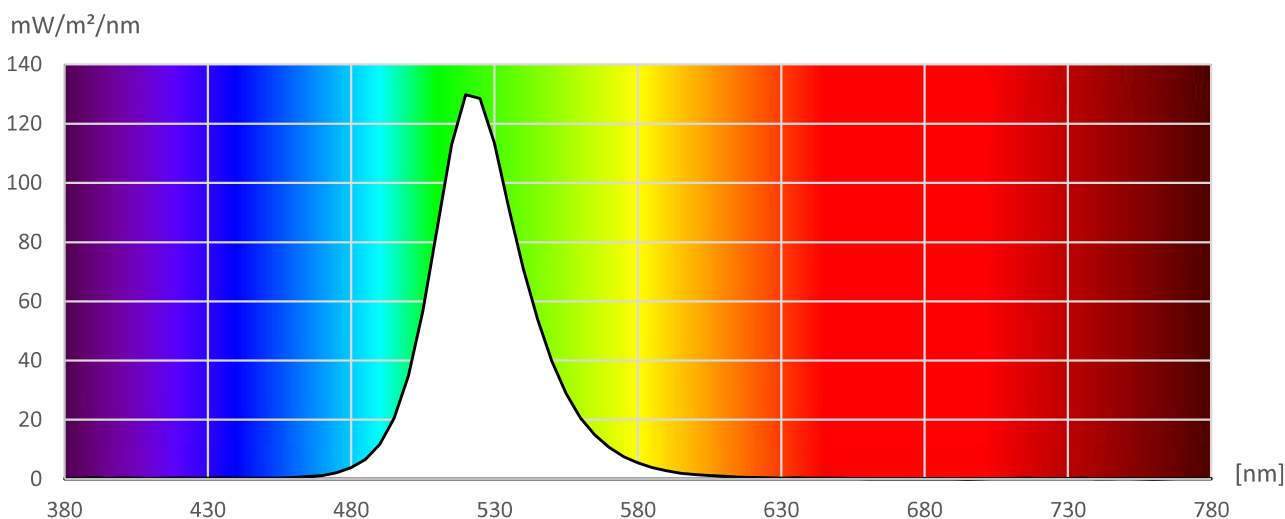

Thomann GmbH
Hans-Thomann-Str. 1
D-96138 Burgebrach, Germany

Burgebrach, 01.08.2018

Sebastian Laske


First, last name of inspector

Measurement protocol

th.mann

Test object: Stairville
Tri Flat PAR Profile 5x3W 25°
Item 309298 / @ 3 m / green

Measurement file: 309298_3m_g.CSV
Date of measurement: 01.08.2018
Time of measurement: 12:36:16

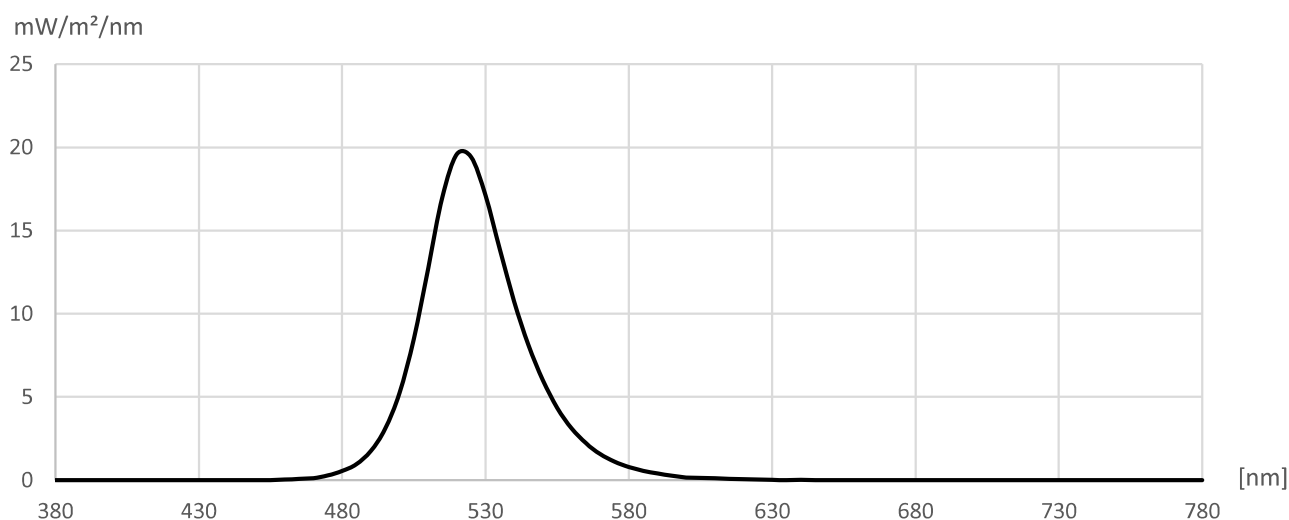

R1 = -35,7	Ra = -25,2
R2 = -8,7	Re = -56,0
R3 = -21,7	GAI = 0,5
R4 = -66,4	
R5 = -10,2	
R6 = -15,0	
R7 = -8,9	
R8 = -35,2	
R9 = #####	
R10 = #####	
R11 = -96,5	
R12 = -31,0	
R13 = -40,7	
R14 = 39,4	
R15 = -40,5	

Illuminance	405,96 lx
Ee	0,802 W/m ²
LER	506,0 lm/W
correlated color temperature (CCT)	7643 K
Duv	0,1552
Saturation	80,1 %
Dominant wavelength	526 nm
Peak wavelength	522 nm
Flicker frequency	% < 2.5 Hz
Percent Flicker	< 2.5 %
Flicker index	% < 2.5

CIE1931
x = 0,1802
y = 0,7275
CIE1976
u' = 0,0634
v' = 0,5759
CIE1960
u = 0,0634
v = 0,3839
TM30
Rf = 0,7
Rg = 7,6

[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm
380	0,00	440	0,00	500	5,25	560	3,12	620	0,06	680	0,00	740	0,00
385	0,00	445	0,01	505	8,52	565	2,23	625	0,05	685	0,00	745	0,00
390	0,00	450	0,00	510	12,76	570	1,57	630	0,02	690	0,00	750	0,00
395	0,00	455	0,01	515	17,02	575	1,12	635	0,01	695	0,00	755	0,00
400	0,00	460	0,04	520	19,58	580	0,80	640	0,02	700	0,00	760	0,00
405	0,00	465	0,08	525	19,42	585	0,57	645	0,00	705	0,00	765	0,00
410	0,00	470	0,13	530	17,11	590	0,41	650	0,00	710	0,00	770	0,00
415	0,00	475	0,29	535	13,85	595	0,28	655	0,00	715	0,00	775	0,00
420	0,00	480	0,56	540	10,75	600	0,17	660	0,00	720	0,00	780	0,00
425	0,00	485	0,96	545	8,12	605	0,15	665	0,00	725	0,00		
430	0,00	490	1,75	550	6,02	610	0,11	670	0,00	730	0,00		
435	0,00	495	3,09	555	4,35	615	0,09	675	0,00	735	0,00		

Thomann GmbH
Hans-Thomann-Str. 1
D-96138 Burgebrach, Germany

Sebastian Laske

Burgebrach, 01.08.2018







First, last name of inspector

Measurement protocol

th•mann

Test object: Stairville
Tri Flat PAR Profile 5x3W 25°
Item 309298 / @ 3 m / green

Measurement file: 309298_3m_g.CSV
Date of measurement: 01.08.2018
Time of measurement: 12:36:16

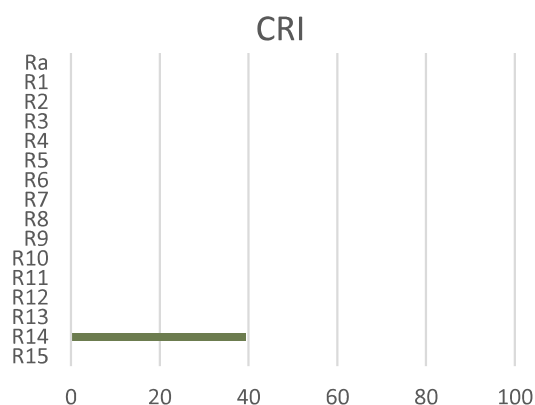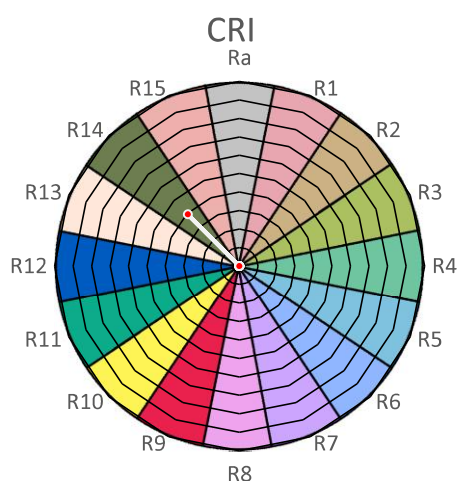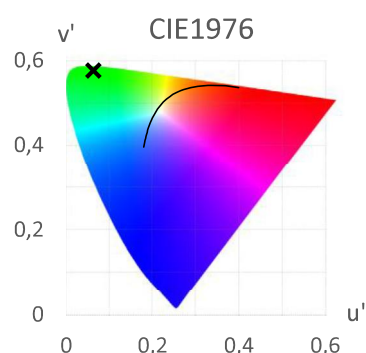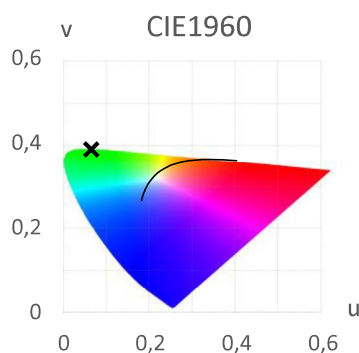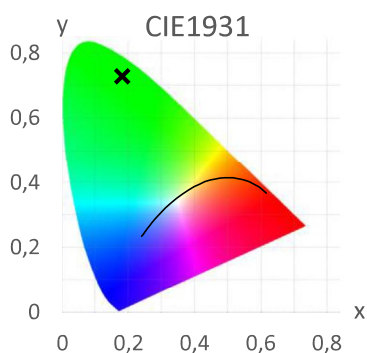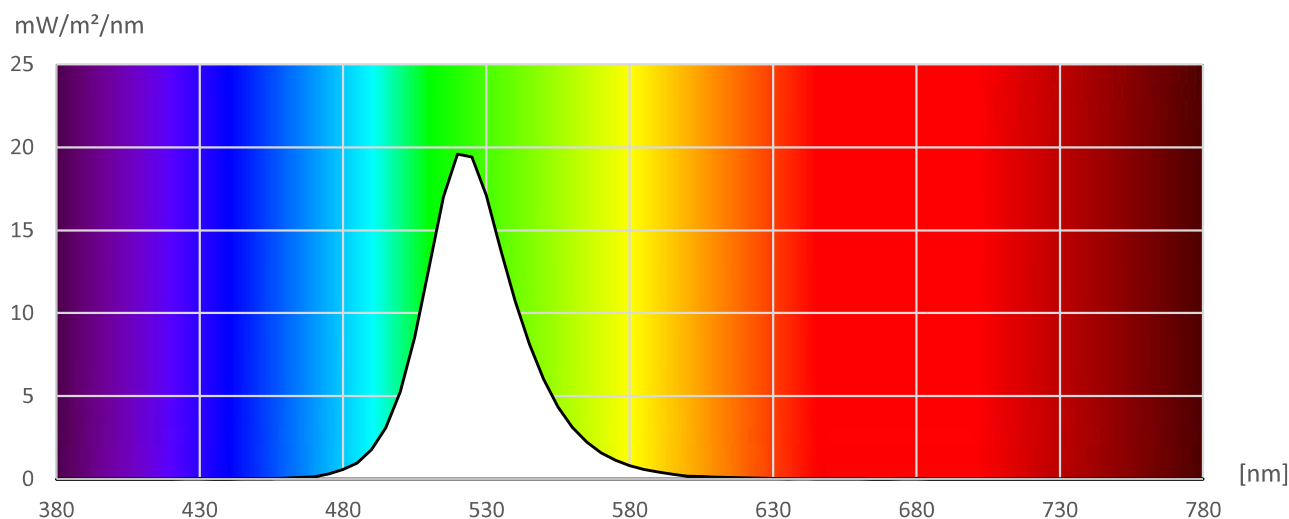

Thomann GmbH
Hans-Thomann-Str. 1
D-96138 Burgebrach, Germany

Burgebrach, 01.08.2018

Sebastian Laske


First, last name of inspector

Measurement protocol

th.mann

Test object: Stairville
Tri Flat PAR Profile 5x3W 25°
Item 309298 / @ 1 m / blue

Measurement file: 309298_1m_b.CSV
Date of measurement: 01.08.2018
Time of measurement: 12:36:29

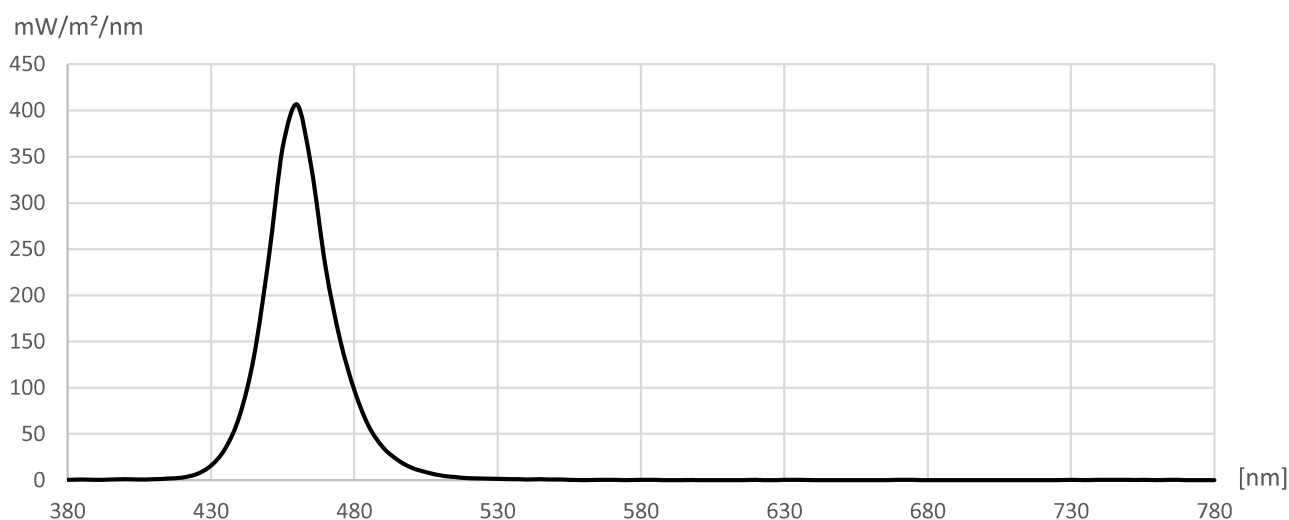

R1 = -	Ra = -	Illuminance	618,7 lx	CIE1931
R2 = -	Re = -	Ee	11,296 W/m²	x = 0,1415
R3 = -	GAI = -	LER	54,8 lm/W	y = 0,0446
R4 = -				
R5 = -		correlated color temperature (CCT)	> 50000 K	CIE1976
R6 = -		Duv	-	u' = 0,1741
R7 = -				v' = 0,1234
R8 = -		Saturation	98,2 %	
R9 = -				CIE1960
R10 = -		Dominant wavelength	457 nm	u = 0,1741
R11 = -		Peak wavelength	458 nm	v = 0,0823
R12 = -				
R13 = -		Flicker frequency	% < 2.5 Hz	TM30
R14 = -		Percent Flicker	< 2.5 %	Rf = -
R15 = -		Flicker index	% < 2.5	Rg = -

[nm]	mW/m²/nm	[nm]	mW/m²/nm	[nm]	mW/m²/nm	[nm]	mW/m²/nm	[nm]	mW/m²/nm	[nm]	mW/m²/nm	[nm]	mW/m²/nm
380	0,46	440	69,90	500	13,43	560	0,00	620	0,30	680	0,00	740	0,39
385	0,74	445	134,26	505	8,61	565	0,40	625	0,02	685	0,23	745	0,52
390	0,35	450	237,96	510	5,22	570	0,54	630	0,33	690	0,00	750	0,31
395	0,76	455	359,01	515	3,41	575	0,23	635	0,37	695	0,22	755	0,32
400	1,14	460	406,45	520	2,24	580	0,31	640	0,03	700	0,20	760	0,14
405	0,76	465	338,84	525	1,95	585	0,33	645	0,05	705	0,25	765	0,56
410	1,12	470	229,88	530	1,39	590	0,02	650	0,04	710	0,16	770	0,25
415	1,90	475	152,02	535	1,32	595	0,23	655	0,09	715	0,19	775	0,00
420	3,04	480	97,08	540	0,93	600	0,27	660	0,07	720	0,00	780	0,00
425	6,81	485	58,87	545	0,99	605	0,11	665	0,17	725	0,02		
430	15,60	490	35,68	550	0,77	610	0,01	670	0,35	730	0,38		
435	34,41	495	22,23	555	0,54	615	0,23	675	0,33	735	0,15		

Thomann GmbH
Hans-Thomann-Str. 1
D-96138 Burgebrach, Germany

Sebastian Laske

Burgebrach, 01.08.2018







First, last name of inspector

Measurement protocol

th•mann

Test object: Stairville
Tri Flat PAR Profile 5x3W 25°
Item 309298 / @ 1 m / blue

Measurement file: 309298_1m_b.CSV
Date of measurement: 01.08.2018
Time of measurement: 12:36:29

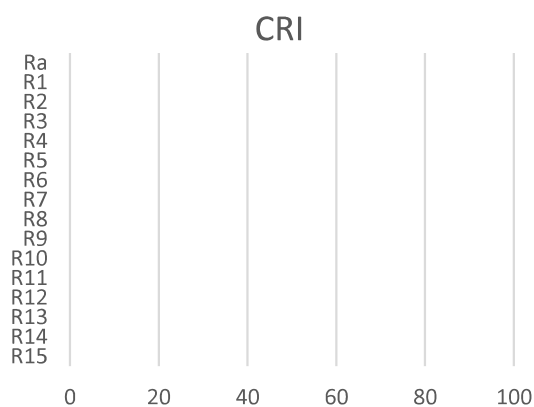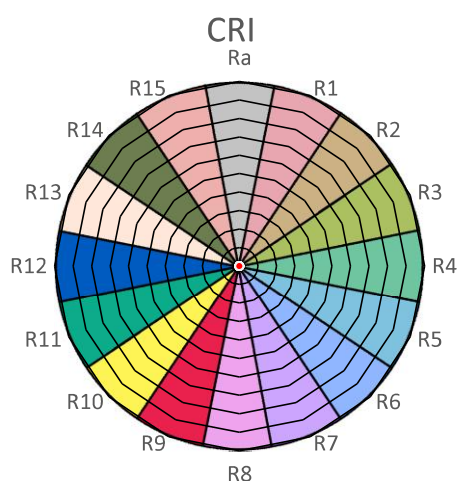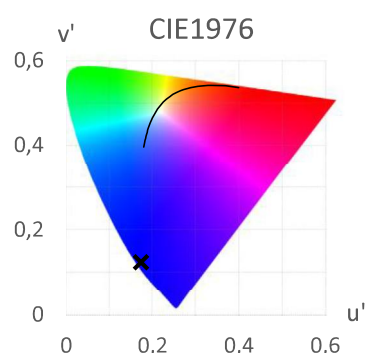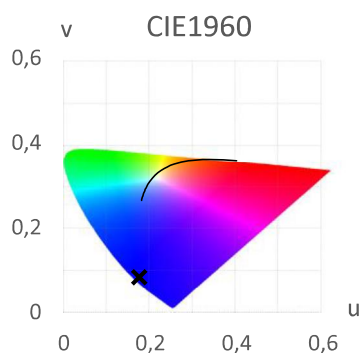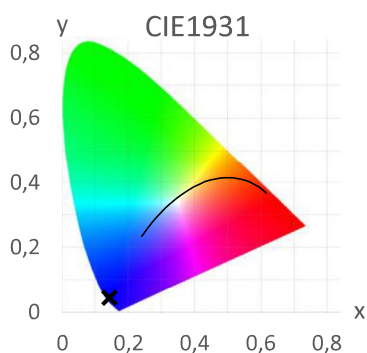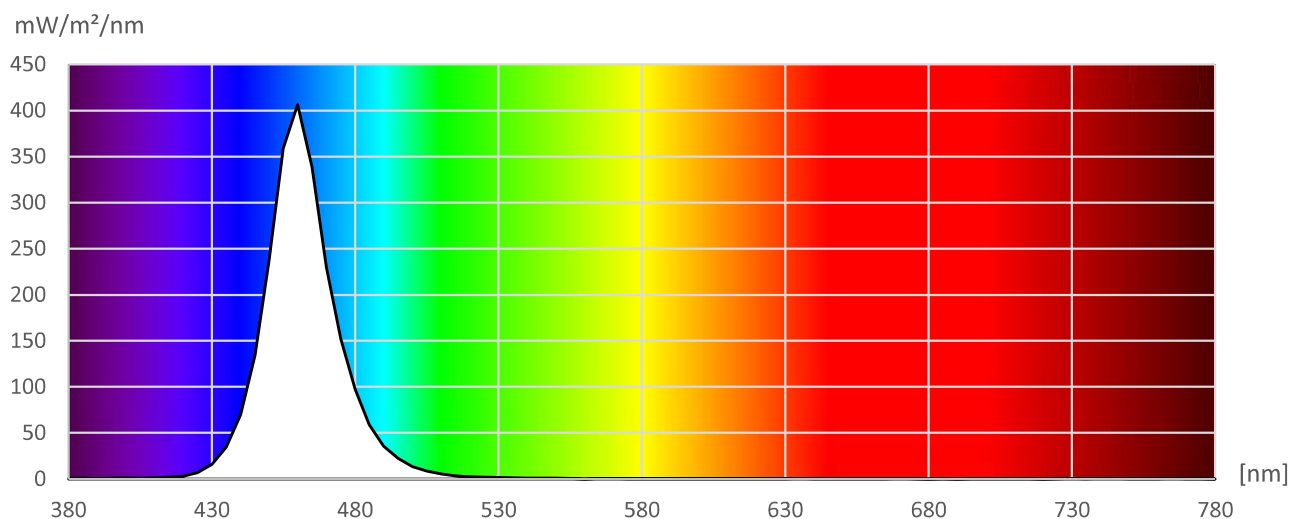

Thomann GmbH
Hans-Thomann-Str. 1
D-96138 Burgebrach, Germany

Burgebrach, 01.08.2018

Sebastian Laske


First, last name of inspector

Measurement protocol

th.mann

Test object: Stairville
Tri Flat PAR Profile 5x3W 25°
Item 309298 / @ 3 m / blue

Measurement file: 309298_3m_b.CSV
Date of measurement: 01.08.2018
Time of measurement: 12:36:39

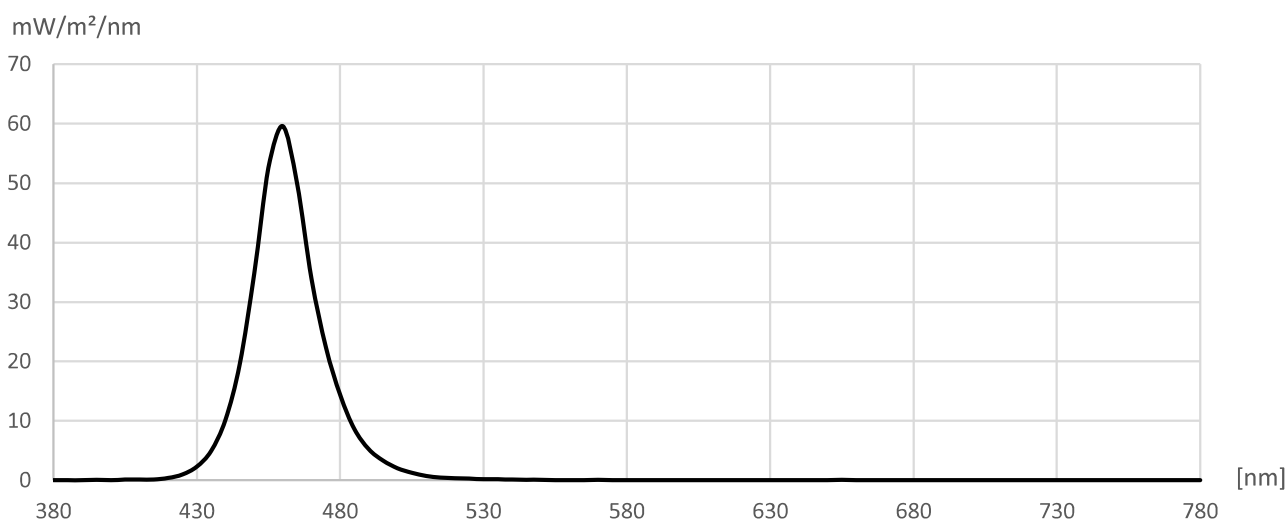

R1 = -	Ra = -	Illuminance	89,27 lx	CIE1931
R2 = -	Re = -	Ee	1,647 W/m ²	x = 0,1410
R3 = -	GAI = -	LER	54,2 lm/W	y = 0,0440
R4 = -				
R5 = -		correlated color temperature (CCT)	> 50000 K	CIE1976
R6 = -		Duv	-	u' = 0,1737
R7 = -				v' = 0,1220
R8 = -		Saturation	98,4 %	
R9 = -				CIE1960
R10 = -		Dominant wavelength	457 nm	u = 0,1737
R11 = -		Peak wavelength	458 nm	v = 0,0813
R12 = -				
R13 = -		Flicker frequency	% < 2.5 Hz	TM30
R14 = -		Percent Flicker	< 2.5 %	Rf = -
R15 = -		Flicker index	% < 2.5	Rg = -

[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm	[nm]	mW/m ² /nm
380	0,00	440	10,18	500	2,02	560	0,01	620	0,00	680	0,00	740	0,00
385	0,02	445	19,62	505	1,24	565	0,03	625	0,00	685	0,00	745	0,00
390	0,00	450	34,79	510	0,74	570	0,05	630	0,01	690	0,01	750	0,00
395	0,09	455	52,51	515	0,45	575	0,02	635	0,00	695	0,01	755	0,00
400	0,00	460	59,59	520	0,36	580	0,00	640	0,01	700	0,00	760	0,00
405	0,10	465	49,92	525	0,26	585	0,00	645	0,00	705	0,00	765	0,00
410	0,13	470	33,88	530	0,17	590	0,00	650	0,00	710	0,01	770	0,00
415	0,13	475	22,39	535	0,16	595	0,02	655	0,05	715	0,00	775	0,00
420	0,38	480	14,29	540	0,11	600	0,00	660	0,00	720	0,00	780	0,00
425	1,01	485	8,63	545	0,10	605	0,01	665	0,00	725	0,03		
430	2,29	490	5,22	550	0,09	610	0,00	670	0,02	730	0,00		
435	4,92	495	3,30	555	0,03	615	0,00	675	0,00	735	0,00		

Thomann GmbH
Hans-Thomann-Str. 1
D-96138 Burgebrach, Germany

Sebastian Laske

Burgebrach, 01.08.2018







First, last name of inspector

Measurement protocol

th•mann

Test object: Stairville
Tri Flat PAR Profile 5x3W 25°
Item 309298 / @ 3 m / blue

Measurement file: 309298_3m_b.CSV
Date of measurement: 01.08.2018
Time of measurement: 12:36:39

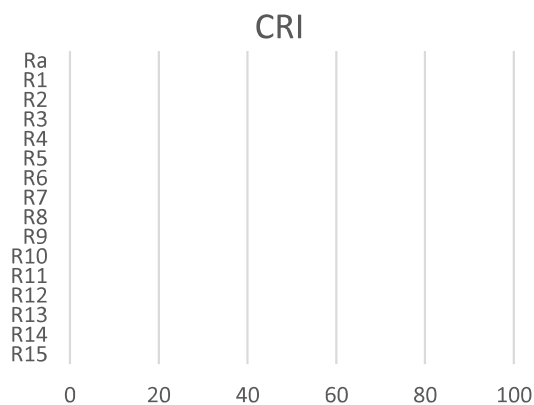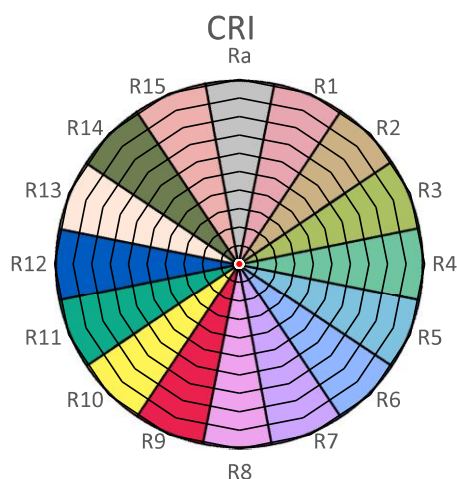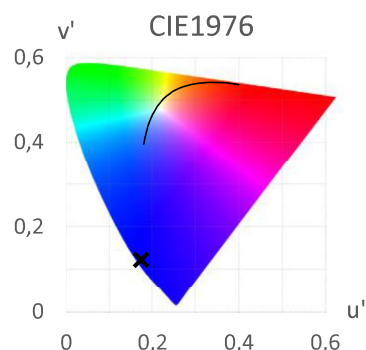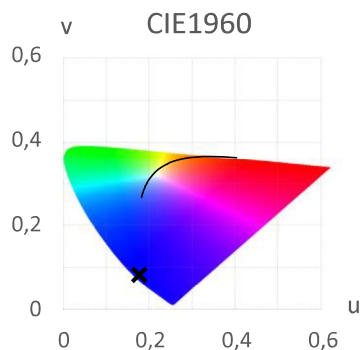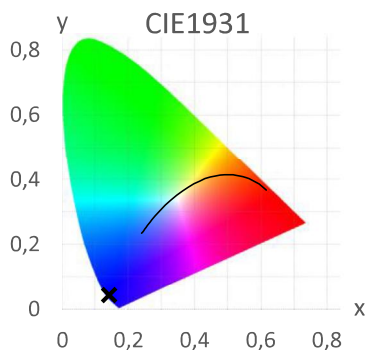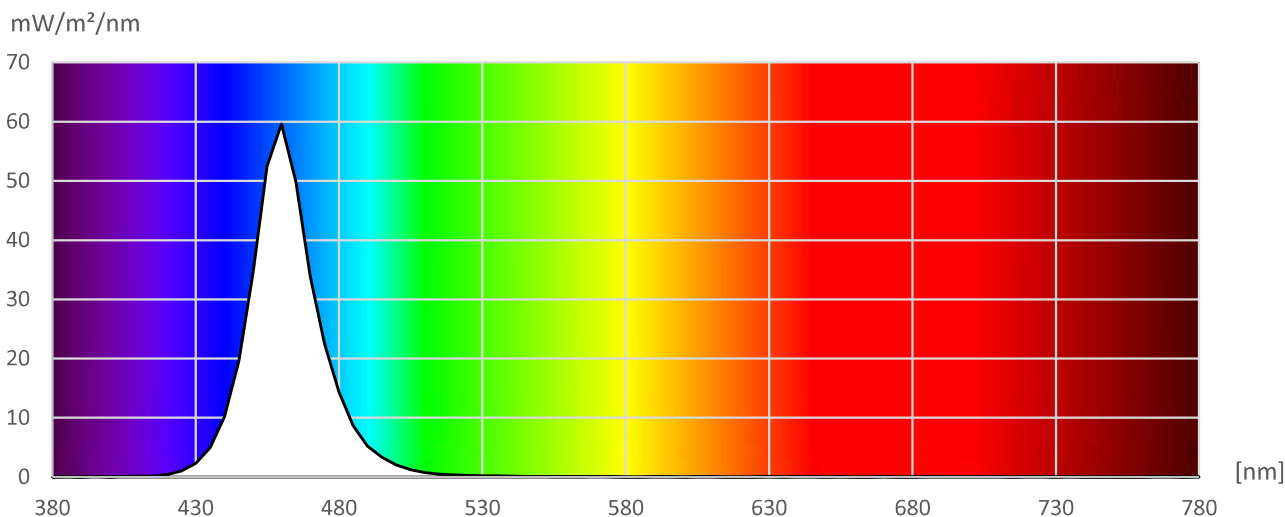

Thomann GmbH
Hans-Thomann-Str. 1
D-96138 Burgebrach, Germany

Burgebrach, 01.08.2018

Sebastian Laske

First, last name of inspector