

# ME 67

## Microphones | K6 Modular System

Cat. No. 003285

### General Description

The ME 67 is a long gun microphone head designed for use with the K6 and K6P powering modules. A highly directional microphone, it can be used where the microphone must be placed at a distance from the sound source. Matt black, anodised, scratch-resistant finish.



Pictured with K6 powering module and cable (available separately)

### Features

- Lobar pick-up pattern
- Highly directional
- Very low inherent self-noise
- High sensitivity factor
- Wide frequency response
- Delivery includes: 1 ME 67



### Recommended Accessories

- MZW 67 pro foam windshield

Cat. No. 003832

### Technical Data

Pick-up pattern .....	lobar (long gun)
Frequency response .....	40 – 20,000 Hz ± 2.5 dB
Sensitivity	
(free field, no load) (1 kHz) .....	50 mV/Pa ± 2.5 dB
Nominal impedance .....	200 Ω (with K6)
Min. terminating impedance .....	1 kΩ (with K6)
Equivalent noise level	
A-weighted (DIN IEC 651) .....	10 dB
CCIR-weighted (CCIR 468-3) .....	21 dB
Max. SPL (1 kHz) .....	126 dB (THD = 1 %)
Dimensions .....	∅ 22.5 x 343 mm (0.89" x 13.50")
Weight .....	100 g (3.53 oz)

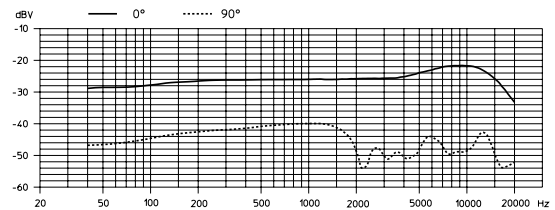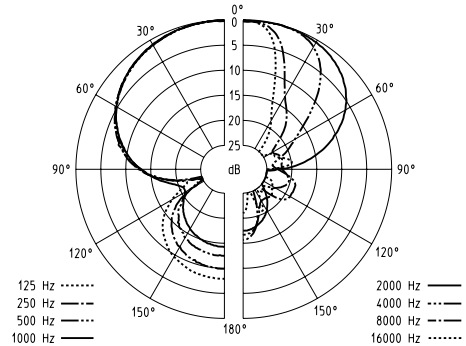

### Profile

Lobar (long gun) microphone head suitable for K6 and K6P powering modules. Frequency response 50 Hz – 20,000 Hz ± 2.5 dB, sensitivity (free field, no load) 50 mV/Pa ± 2.5 dB at 1 kHz, nominal impedance 200 Ω (with K6), min. terminating impedance 1 kΩ (with K6), equivalent noise level A-weighted 10 dB, CCIR-weighted 21 dB, max. SPL 126 dB at 1 kHz (THD = 1 %), dimensions ∅ 22.5 x 343 mm (0.89" x 13.50"), weight 100 g (3.53 oz).