

# NT3

Studio and Location Multi-Powered 3/4" Condenser Microphone

**RØDE**<sup>®</sup>  
MICROPHONES




## Features

- True condenser externally biased 3/4" capsule
- Dual power operation
- Cast metal body with durable satin-nickel finish
- Transformerless output
- Internal capsule shock mounting
- High level of RF rejection
- Audio-grade surface mount components
- Full frequency response
- Designed and manufactured in Australia
- Full 10 year warranty\*


## Specifications

Acoustic Principle	Pressure gradient	Directional Pattern	Cardioid
Frequency Range	20 Hz-20 kHz	Sensitivity	-39 dB re 1 Volt/Pascal (12 mV @ 94 dB SPL) +/- 2 dB @ 1kHz
Output Impedence	200Ω	Dimensions	Length - 206mm (8.1102") Diameter - 32mm (1.2598")
Output Connection	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)	Shipping Weight	640g
Net Weight	371g		

## Frequency Response

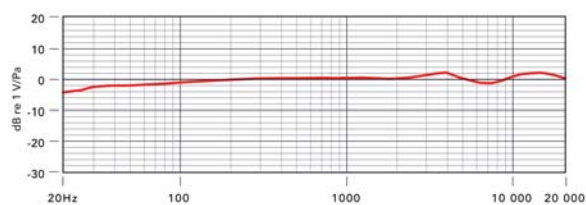

## Polar Pattern



## Included Accessories

- RM3 stand mount
- ZP1 zip pouch
- WS3 windshield



[www.rodemic.com](http://www.rodemic.com)

\*After online registration