



WB-383 PRA-383 PRA-383D

Description

WB-383, PRA-383, PRA-383D are designed for the miking and recording of brass and stringed instruments and TOM-TOM drum. With high sound pressure capability and miniature shapes, they are ideal for the miking in tough onstage usage. The integrated gooseneck and clip provide great convenience in installing, and enable the user to appreciate music with optimum mobility. Among them, WB-383 is applicable for wireless system.




Microphone for the Miking and Recording of Musical Instruments

Features

- Super-cardioid, high gain before feedback
- Gooseneck with clip, can be easily installed to any brass and stringed instruments
- WB-383 is equipped with a cable of 1.5 M with a Tini Q-G (TA4F) plug
- PRA-383 is equipped with a cable of 1.5 M with a Tini Q-G (TA3F) plug, one PS-418S power supply with XLR connectors
- PRA-383D is equipped with a cable of 1.5 M with a Tini Q-G (TA3F) plug, one PS-418D power supply (for battery and phantom) with XLR connectors

Specifications


Type:	Condenser Microphone
Polar Pattern:	SuperCardioid
Frequency Response:	40~18000Hz
Sensitivity	-42dBV/Pa (8mV/Pa)
Rated Impedance	200Ω
Equivalent Noise Level:	23dB (A weighted IEC/DIN 651)
Max. SPL:	137dB (THD≤ 0.5% 1000Hz)
Dynamic Range:	114dB
Power Supply:	PRA-383: 48V Phantom power(IEC 268-15/DIN 45596); PRA-383D: Both phantom and battery powered
Current Consumption:	3.5mA
Connector:	Φ20x150mm
Weight:	160g (accessories excluded)

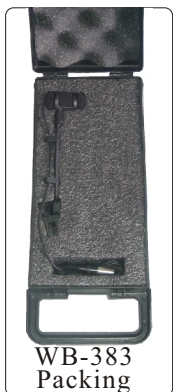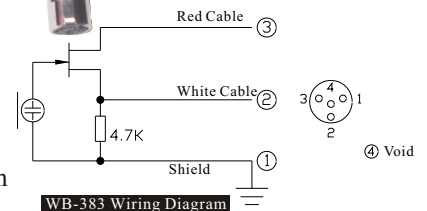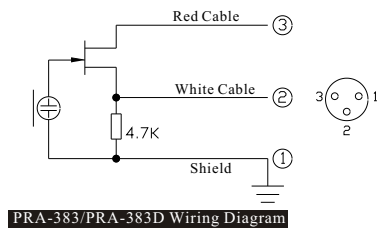

Supplied With PS-418S



Supplied With PS-418D

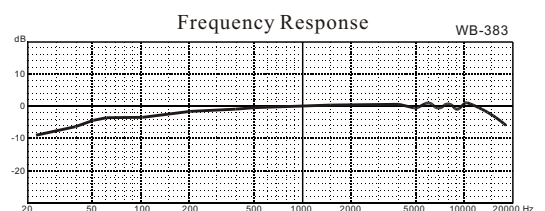

GOANG-FANN CO., LTD.

3F, No.7, Alley 2, Lane 342, Fu-Der 1st Road
Hsichih, Taipei, Taiwan

Tel: 886-2-26931323 Fax: 886-2-26948990

E-mail: sales@tenlux.com.tw

Http://www.superlux.com.tw