


F44 P

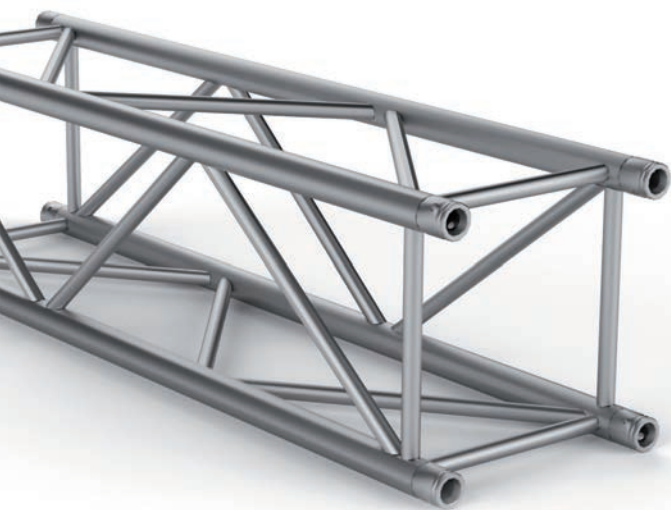

GLOBAL TRUSS F44P TRUSS SYSTEM

Global Truss represents the highest quality and reliability.

The Global Truss F44P is a 4-point truss system. This provides optimum volume and carrying capacity for its construction size and a tube diameter of only 50mm. This system is connected via a special conical connector system, which is joined together to a complete form fit by means of a copper hammer, creating optimal traction.

The Global Truss F44P finds application in trade fairs and shops, as well as in the event industry in general. It is also characterised by a minimum transport volume and the special lightweight design.

The conical connectors are of course included in the scope of delivery - special designs and powder coatings can be carried out at short notice.

Global Truss has the largest truss storage worldwide and is permanently able to deliver all systems. Furthermore, Global Truss is the only truss manufacturer with its own coupler and hook range tested by "TÜV" and "DIN".




TECHNICAL DATA

| | |
|--|---------------|
| Pipe diameter main pipe: | 50mm |
| Wall thickness: | 3mm |
| Material: | EN AW-6082 T6 |
| Snake brace: | 8,8mm |
| Conical connectors included in scope of delivery | |



INCLUSIVE



LOAD TABLE

| Span | Uniform distribution load | Deflection | Center point load | Deflection | point load in third-point | Deflection | point load in quarter-point | Deflection | point load in 1/5 Punkten | Deflection |
|-------|---------------------------|------------|-------------------|------------|---------------------------|------------|-----------------------------|------------|---------------------------|------------|
| m | kg / m | cm | kg | cm | kg | cm | kg | cm | kg | cm |
| 4,00 | 942,00 | 0,83 | 1801,00 | 0,63 | 1180,00 | 0,71 | 888,00 | 0,74 | 757,00 | 0,80 |
| 5,00 | 706,00 | 1,51 | 1520,00 | 1,05 | 1018,00 | 1,19 | 787,00 | 1,29 | 650,00 | 1,35 |
| 6,00 | 503,00 | 2,25 | 1311,00 | 1,57 | 893,00 | 1,82 | 706,00 | 2,00 | 559,00 | 2,02 |
| 7,00 | 374,00 | 3,11 | 1151,00 | 2,21 | 793,00 | 2,58 | 624,00 | 2,82 | 489,00 | 2,82 |
| 8,00 | 288,00 | 4,12 | 1023,00 | 2,95 | 712,00 | 3,48 | 549,00 | 3,74 | 433,00 | 3,75 |
| 9,00 | 228,00 | 5,25 | 919,00 | 3,81 | 644,00 | 4,52 | 490,00 | 4,78 | 389,00 | 4,83 |
| 10,00 | 185,00 | 6,53 | 832,00 | 4,78 | 588,00 | 5,70 | 441,00 | 5,95 | 352,00 | 6,04 |
| 11,00 | 152,00 | 7,94 | 759,00 | 5,87 | 539,00 | 7,02 | 401,00 | 7,26 | 321,00 | 7,39 |
| 12,00 | 127,00 | 9,48 | 697,00 | 7,07 | 497,00 | 8,48 | 366,00 | 8,69 | 294,00 | 8,88 |
| 13,00 | 108,00 | 11,17 | 642,00 | 8,40 | 460,00 | 10,09 | 336,00 | 10,27 | 271,00 | 10,51 |
| 14,00 | 92,00 | 12,99 | 594,00 | 9,84 | 427,00 | 11,84 | 310,00 | 11,97 | 251,00 | 12,28 |
| 15,00 | 79,00 | 14,95 | 552,00 | 11,41 | 398,00 | 13,74 | 288,00 | 13,82 | 233,00 | 14,20 |
| 16,00 | 69,00 | 17,05 | 514,00 | 13,11 | 372,00 | 15,79 | 267,00 | 15,80 | 217,00 | 16,26 |
| 17,00 | 60,00 | 19,29 | 480,00 | 14,94 | 349,00 | 17,99 | 249,00 | 17,92 | 202,00 | 18,46 |
| 18,00 | 53,00 | 21,67 | 449,00 | 16,90 | 327,00 | 20,34 | 233,00 | 20,18 | 189,00 | 20,82 |
| 19,00 | 47,00 | 24,20 | 420,00 | 19,00 | 307,00 | 22,85 | 218,00 | 22,59 | 177,00 | 23,32 |
| 20,00 | 42,00 | 26,87 | 395,00 | 21,24 | 289,00 | 25,52 | 204,00 | 25,13 | 166,00 | 25,97 |

The weight of the truss is considered in the load table

Technical changes and errors are reserved



Visit the official Global Truss website:
www.GlobalTruss.de