


### Features

- Switch panel, 8-way
- Eight outlets with hinged lid
- Outlets individually switchable by frontal on / off switches
- Ideal for rack mounting, 2 RU

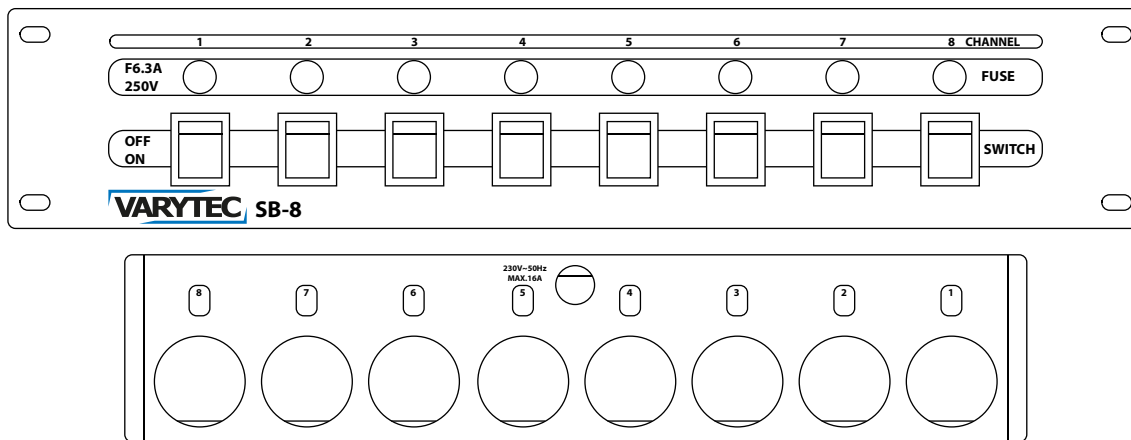

### Technical specifications

- Individual channel secured, 250 V / 6.3 A
- Max. power output per channel: 1,300 watt
- Max. power in total: 3,680 watt
- Operating supply voltage: 230 - 240 V ~ 50/60 Hz
- Permitted ambient temperature: -5 °C to 45 °C
- Dimensions (W × H × D): 435 mm × 96 mm × 137 mm
- Weight: 2.8 kg



Ensure that plastic bags, packaging, etc. are properly disposed of and are not in the reach of babies and young children. Choking hazard!



For the packaging, environmentally friendly materials have been chosen that can be supplied to normal recycling. Ensure that plastic bags, packaging, etc. are properly disposed of. Do not just dispose of these materials with your normal household waste, but make sure that they are collected for recycling. Please follow the notes and markings on the packaging.



This product is subject to the European Waste Electrical and Electronic Equipment Directive (WEEE) in its currently valid version. Do not dispose with your normal household waste.

Dispose of this device through an approved waste disposal firm or through your local waste facility. When discarding the device, comply with the rules and regulations that apply in your country. If in doubt, consult your local waste disposal facility.