




VM-22HDMI

2x1:2 HDMI Distribution Amplifier



The **VM-22HDMI** is a distribution amplifier for HDMI signals. The unit reclocks and equalizes one of 2 selectable input signals and distributes it to 2 identical outputs.

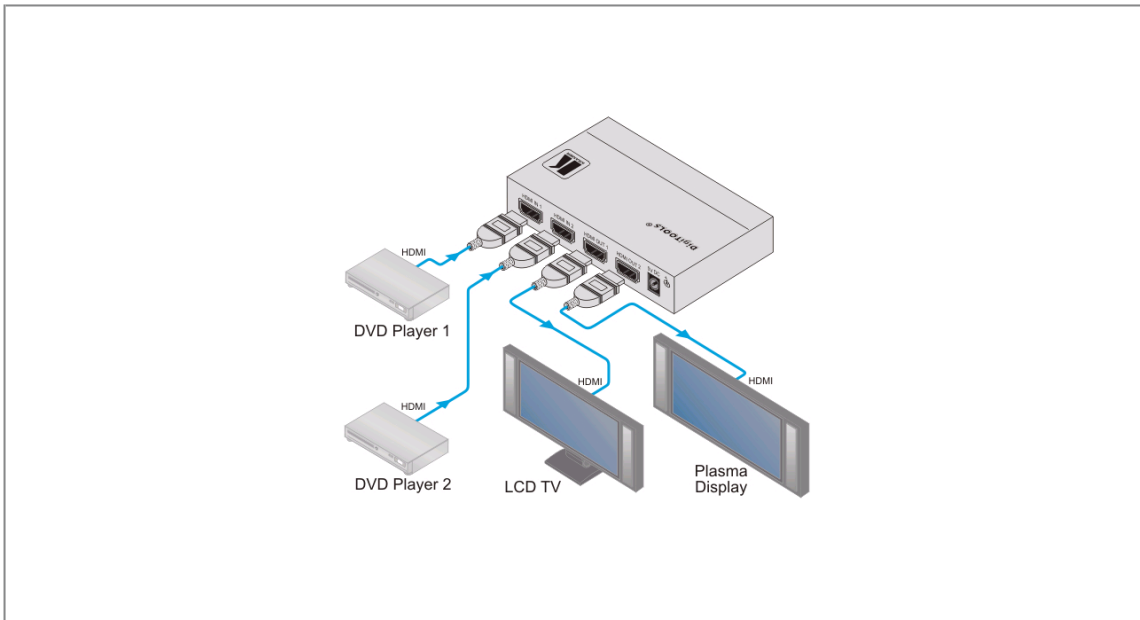



VM-22HDMI

FEATURES

- Max Data Rate - 2.25Gbps.
- HDCP Compliant.
- HDMI 1.3a Compliant.
- Enhanced EDID (Extended Display Identification Data) - The unit can store a separate EDID for each input in non-volatile memory as well as having a default EDID if one is not stored. This allows a convenient and reliable connection to the source.
- Active Output LED Indicators.
- Control - Front panel or IR remote switching.
- Kramer Equalization & re-Klocking Technology - Rebuilds the digital signal integrity to travel longer distances.
- Compact DigiTOOLS® - 3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.

TECHNICAL SPECIFICATIONS

| | |
|--------------------------------|--|
| INPUTS: | 2 HDMI connectors. |
| OUTPUTS: | 2 HDMI connectors. |
| BANDWIDTH: | Supports up to 2.25Gbps bandwidth per graphic channel. |
| COMPLIANCE WITH HDMI STANDARD: | Supports HDMI 1.3 and HDCP. |
| CONTROLS: | EDID SETUP button, input select button. |
| INDICATOR LEDs: | IN 1, IN 2, OUT 1, OUT 2, and ON LEDs. |
| POWER SOURCE: | 5V DC, 910mA. |
| DIMENSIONS: | 12cm x 7.15cm x 2.44cm (4.7" x 2.8" 0.96") W, D, H. |
| WEIGHT: | 0.3kg (0.67lbs) approx. |
| ACCESSORIES: | Power supply, bracket installation kit. |
| OPTIONS: | HDMI/HDMI male-to-male cables. |