

Passive Bass Extension **TSM Sub**

The TSM Sub is a high-power universal subwoofer. The 15" Neodymium driver provides accurate and efficient bass reproduction over a wide frequency range. An integrated switchable passive crossover allows the TSM Sub to be used either in conjunction with an external active crossover, or as part of a passive 2 way system.



PRODUCT SPECIFICATIONS

Speaker Components	15" Nd
Description	Passive Bass Extension
Power AES / Peak	500 W / 1500 W
Impedance nominal	8 Ω
SPL 1 W / Peak @ 1 m	99 dB / 131 dB
Usable Range - 6 dB	35 Hz - 220 Hz
Tuning Frequency excursion minimum	42 Hz
Connectors	2 x Neutrik Speakon NL4MP in/out Coding: 1+/- loop thru, 2+/- Sub Incl. switcher for active / passive operation
Handles	2 x
Rigging / Fittings	M20 on top Wheel board fittings
Weight	24,0 kg (+ 6,0 kg wheel board)
Size height x width x depth	51,5 x 47,0 x 56,0 cm
Order No.	00974



Removable wheel board for simple transportation.




Two large bar handles for easy handling.



M20 flange on top.

DIMENSIONS

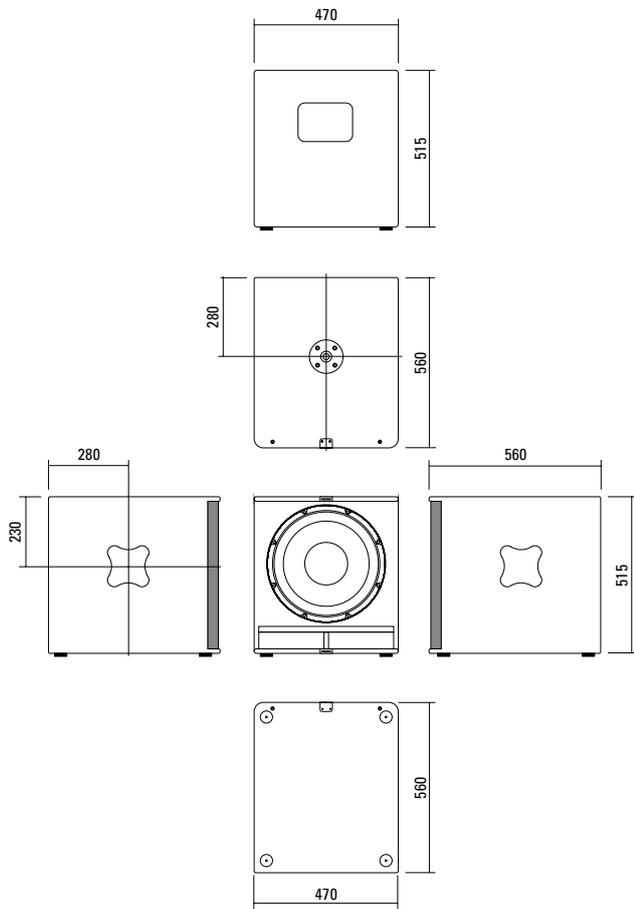


Controller Setups finden Sie unter:


<http://www.seeburg.net/de/downloads>

MEASUREMENTS

Presets - Frequency Response

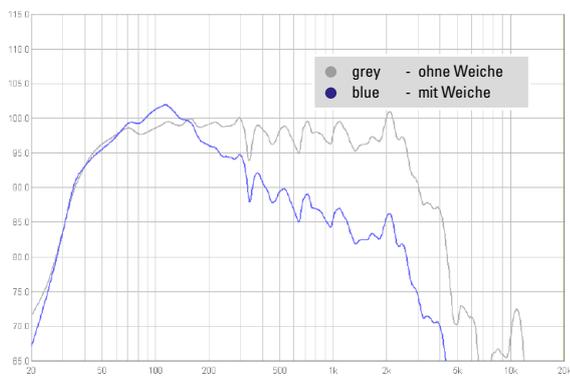

Impedance

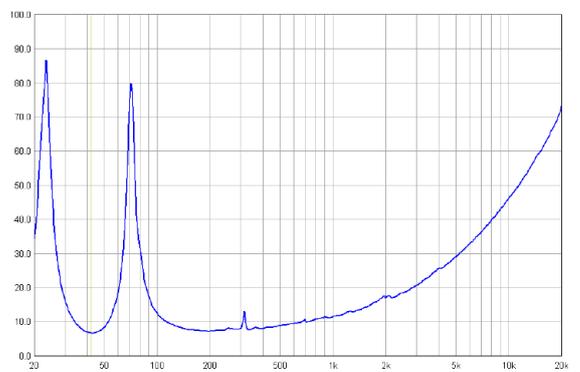

ACCESSORIES TSM Sub

Speaker Pole

M20, with wind up, K&M

Order No. **03023**




M20, adjustable, K&M

Order No. **03022**




Flight Case



for 1 x TSM Sub, heavy duty,
6,5 mm birch multiplex, PVC coated,
ball corners, 6 x recessed sprung
handles, 4 x butterfly catches,
100 mm blue wheels, 2 x with brake,
interior lined with felt

Order No. **16048**



Cover

for TSM Sub (all types)
without wheel board

Order No. **01247**



for TSM Sub (all types)
with wheel board

Order No. **01246**



Wheel Board

for TSM Sub, stackable, 6 kg

Order No. **01265**



Stackable wheel board.