



CDX1-1446



Features

- 1" exit lightweight and compact ferrite magnet compression driver with 1.4" copper clad aluminium voice coil
- 20Wrms power handling (AES standard) and 106dB sensitivity
- 35mm/1.38in screw attachment
- One piece PETP diaphragm and surround
- Finite Element Analysis (FEA) techniques used to optimise both magnetic and acoustic design
- Suitable for 2-way and 3-way systems

8 Frequency Response

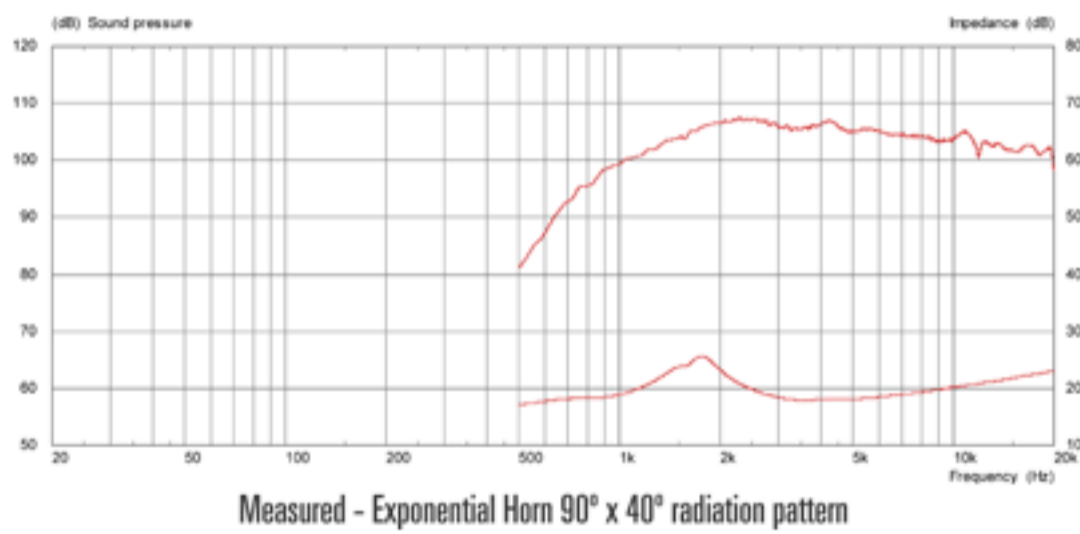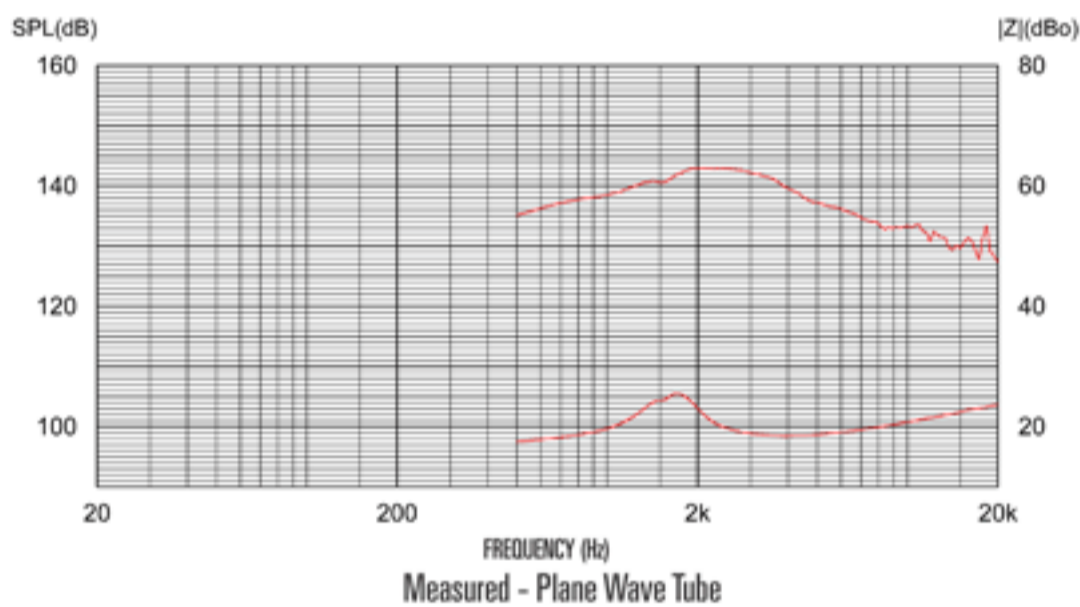

1. Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.
2. Measured on axis at 1W, 1m in 2 anechoic environment.

General Specifications

Power rating ¹	20Wrms
Nominal impedance	8
Frequency range	1500-20000
Sensitivity ²	106dB
Recommended min. crossover (12dB/oct)	2200Hz
Voice coil diameter	35mm/1.4in
Magnet type	Ferrite
Diaphragm material	PETP film
Coil material	Round Copper Coated Aluminium

Mounting Information

Overall width	90.0mm/3.54in
Overall depth	69mm/2.71in
Fitting	Screw (35mm, 1.38in diameter)
Throat exit	25.4mm/1.0in
Unit weight	1.1kg