

The G Sub 1501 is a particularly flat high-performance subwoofer. With a base measurement of 60 x 60 cm it can also accommodate larger HiMid systems using speaker poles without toppling over. Due to its height of only 40 cm, it can easily be integrated in existing stage constructions. Easy handling, an exclusive and modern design and its deep bass reproduction make it a perfect choice for demanding applications.

PRODUCT SPECIFICATIONS


15" Nd
Passive Bass Extension
1000 W / 3000 W
8 Ω
100 dB / 135 dB
35 Hz - 220 Hz (- 6 dB)
42 Hz
2 x Neutrik Speakon NL4MP in/out Coding: 1 +/- loop thru, 2 +/- Sub 1 x Neutrik Speakon NL4MP in/out Coding: 1 +/- Sub, 2 +/- loop thru
2 x
M20 on top Wheelboard fittings
26,0 kg (+ 6,0 kg wheelboard)
40,0 x 60,0 x 60,0 cm
00620




Robust honeycomb type speaker grille. Wheel board fittings.






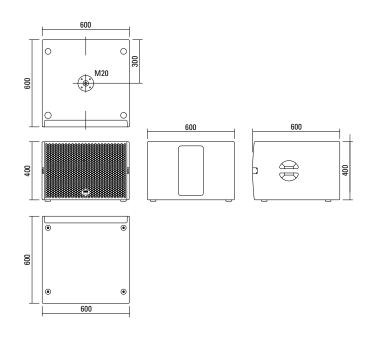

Frequency Response with Presets



Sensitivity 1 W @ 1 m + Impedance



Controller Setups:

http://www.seeburg.net/en/downloads

APPLICATIONS



G Sub 1501 / GL 24





G Sub 1501 / TSM 12



2 x G Sub 1501 dp / G Sub 1501 Cardioid set-up.

ACCESSORIES G Sub 1501

Speaker Pole

M20, with wind up, K&M

Order No. 03023

M20, adjustable, K&M Order No. 03022



Wall Mount

bar: 400 mm, max. load 40 kg, incl. (M10 x 70 mm socket head screw, M10 hex lock nut and flat washer)

Order No. 08130/F400/w (RAL 9010)

Order No. 08130/F400

Ceiling Mount

for Subwoofer, 2 parts, incl. screws

Order No. 08129

Order No. 08129/w (RAL 9010)

MultiRigg™ light

version for fixed installations, for horizontal and vertical alignment, incl. accessories (2 x M10 x 20 socket head screws), max. load 50 kg

Order No. 01362

Cover

for G Sub 1501, by using wheel board

Order No. 01239/WB



Cover

for G Sub 1501, without wheel board

Order No. 01239



Wheel Board

for G Sub 1501, stackable, 6 kg

Order No. 01267







