

REDCOAT GUITAR SERIES

CV-65

Tapping in to another flavor of classic British tone, the 12" CV-65 features warm, throaty mids, sweet, articulate highs, and nice, detailed harmonic complexity. As compared to the 75 watt model, the 65 watt CV-65 is more round and full in the lows, less aggressive in the mids, and is more focused and articulate on the highs.

12" | **65 WATTS**
8 Ω



SPECIFICATION

Nominal Basket Diameter	12", 305 mm
Nominal Impedance*	8 Ω
Power Rating*	65 W
Resonance (Fs)	76 Hz
Usable Frequency Range	80 Hz – 5 kHz
Sensitivity*	100.6 dB
DC Resistance (Re)	6.9 Ω
Qts	0.59
Magnet Weight	34 oz.
Gap Height	0.31", 8 mm
Voice Coil Diameter	1.75", 44 mm


MOUNTING INFORMATION

Enclosure Type	Closed Back
Open Back	Acceptable
Driver Volume Displaced	0.069 cu.ft., 1.96 liters
Overall Diameter	12.17", 309.1 mm
Baffle Hole Diameter	11.13", 282.7 mm
Depth	5.13", 130.2 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.24", 6.1 mm
Mounting Holes B.C.D.	11.75", 298.5 mm
Net Weight	7.3 lbs, 3.31 kg
Shipping Weight	9.4 lbs, 4.26 kg

MATERIALS OF CONSTRUCTION

Copper voice coil
Nomex former
Ferrite magnet
Non-vented core
Pressed steel basket
Full molded paper cone
Paper cone edge
Zurette dust cap

FREQUENCY RESPONSE & IMPEDANCE CURVE*

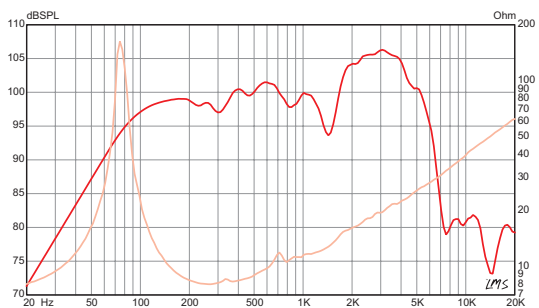

VISIT EMINENCE.COM TO FIND A DEALER NEAR YOU.

* See footnotes on page 2 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.



FOOTNOTES

IMPEDANCE

Please consult www.eminence.com for specifications of models with alternative impedances.

POWER RATING

Multiple units exceed published ratings evaluated under EIA 426A specification while tested in a free-air, non-temperature-controlled environment. Multiple compression drivers exceeded published ratings evaluated under EIA-426A or AES specification while mounted on Eminence's H290, H290S, or H2EA horn in a non-temperature-controlled environment.

SENSITIVITY

The average output across the usable frequency range when applying 1W/1m into the nominal impedance. i.e: 2.83V/8Ω, 4V/16Ω. Eminence response curves are measured under the following conditions: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2 ft. x 2 ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Yamaha P3500S amplifier | 2700 cu. ft. chamber with fiberglass on all six surfaces (three with custom-made wedges). Compression drivers were tested using a 2ft x 2ft baffle built into the wall with horn front mounted.

COAXIALS

BETA 8CX, 10CX, and 12CX are coaxial speakers with tweeter sold separately. Published usable frequency response contingent upon use of ASD:1001 HF Driver.

Prices, product cosmetics and specifications are subject to change without notice.

EMINENCE SPEAKER LLC

838 Mulberry Pike, Eminence, KY 40019



Follow us:

EMINENCE.COM



[YouTube](#)

