



Der G Sub 1001 ist ein kompakter 10" Hochleistungs-Subwoofer in besonders flacher Bauweise.

Das moderne Design und seine hohe Leistungsfähigkeit machen den G Sub 1001 für viele Anwendungen interessant, bei denen eine besonders unauffällige Installation und präzise Basswiedergabe wichtig sind.

PRODUCT SPECIFICATIONS

| | |
|---|--|
| Speaker Components | 10" |
| Description | Passive Bass Extension |
| Power AES / Peak | 350 W / 1100 W |
| Impedance nominal | 8 Ω |
| SPL 1 W / Peak @ 1 m | 97 dB / 128 dB |
| Usable Range -6 dB | 44 Hz - 300 Hz |
| Tuning Frequency excursion minimum | 53 Hz |
| Connectors | 2 x Speakon NL4MP in/out Coding: 1+/- loop thru, 2+/- Sub 1 x Speakon NL4MP in/out Coding: 1+/- Sub, 2+/- loop thru |
| Handles | 1 x |
| Rigging / Fittings | M20 on top |
| Weight | 17,0 kg |
| Size height x width x depth | 28,0 x 43,0 x 43,0 cm |
| Order No. | 00605 |




M20 Flansch auf der Oberseite.



Komfortabler Schalenriff für den einfachen Transport.



DIMENSIONS

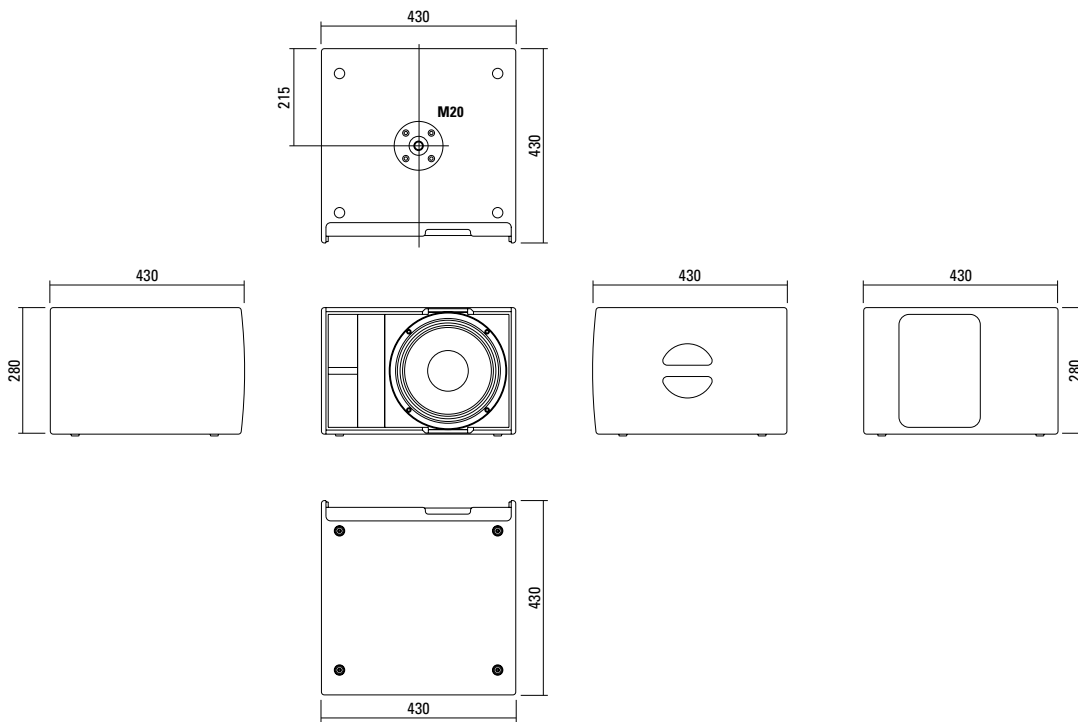


Controller Setups:


<http://www.seeburg.net/de/downloads>

MEASUREMENTS

Frequency Response with Presets

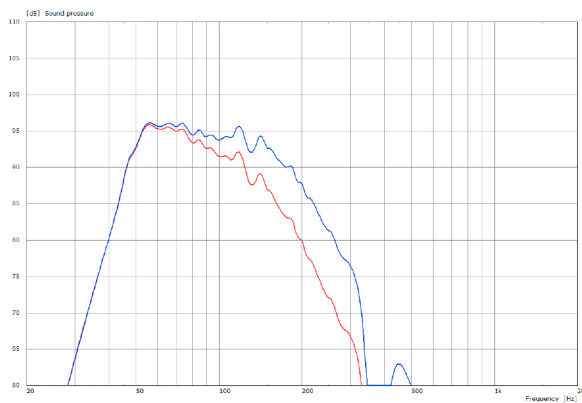

Sensitivity 1 W @ 1 m + Impedance

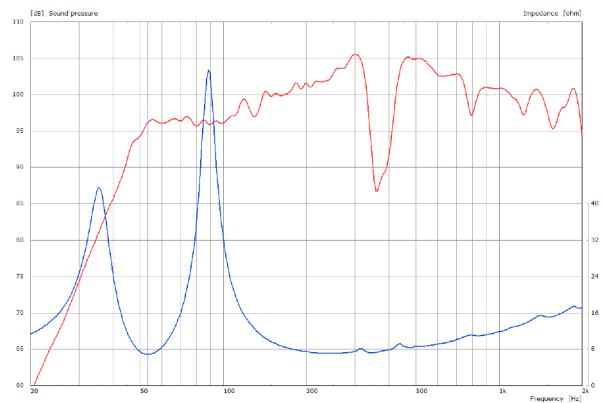

ACCESSORIES G Sub 1001

Speaker Pole

M20, with wind up, K&M

Order No. **03023**



M20, adjustable, K&M

Order No. **03022**



Wall Mount

bar: 269 mm, max. load 40 kg,
incl. (M10 x 70 mm socket head screw,
M10 hex lock nut and flat washer)

Order No. **08130/F/269/w** (RAL 9010)

Order No. **08130/F/269**



Ceiling Mount

for Subwoofer,
2 parts, incl. screws

Order No. **08129**

Order No. **08129/w** (RAL 9010)



MultiRigg™ light

version for fixed installations,
for horizontal and vertical alignment,
incl. accessories (2 x M10 x 20 socket
head screws), max. load 50 kg

Order No. **01362**



Cover

for G Sub 1001, padded

Order No. **01226**

