



APPLICATIONS

- Permanent installations in:
Theatres, Concert halls, Clubs, Places of Worship,
Conference rooms, Indoor sports, Arenas and Stadiums.
- Sound reinforcement for live events:
Touring, Bands, Orchestras.
- Designed as the perfect partner for the FBT X-LITE and X-PRO series.



KEY FEATURES

- Band-pass design active subwoofer
- 18mm / 0,70" Plywood cabinet
- 18" woofer / 3" voice coil
- 1200W Class D power amplifier
- 4 DSP presets
- Frequency response 38Hz - 120Hz
- M20 threads for stand pole mount



PRODUCT DESCRIPTION

The FBT X-SUB 18SA, 1 x 18" band-pass design subwoofer, is the perfect low frequency extension and the ideal companion for the FBT X-LITE and FBT X-PRO series. The FBT X-SUB 18SA provides the following performance criteria: frequency response of 38Hz to 120Hz @ -6dB, maximum SPL of 136 dB peak, 1200W Class D amplifier. The FBT X-SUB 18SA provides a DSP with 4 presets. The FBT X-SUB 18SA feature 0,70" plywood construction covered in a scratch resistant black paint with M20 top mounted stand adapter and two FBT design aluminium handles. The control panel provides stereo combo XLR/jack in-outs, stereo XLR HP filter outs, level control, preset switch, phase reversal switch, prt-lmt led indicator.

ELECTRONIC SPECIFICATIONS


System Type	band pass
Internal amplifiers	1200W
Input Impedance	22 kOhm
Frequency Response	38Hz - 120Hz (@-6dB)
Maximum SPL peak	136dB half space
Dispersion	omnidirectional
AC Power Requirement	600VA

PHYSICAL SPECIFICATIONS



Low Frequency Woofer	18" / 3" coil	
Input Connectors	XLR with loop	
Net Dimensions (WxHxD) inch	20,07 x 26,22 x 25,59	
	mm	510 x 666 x 650
Shipping Dimensions (WxHxD) inch	23,62 x 29,13 x 29,13	
	mm	600 x 740 x 740
Net Weight	74,95 lbs / 34kg	
Shipping Weight	81,57 lbs / 37kg	
Enclosure Material	plywood	
Grille	Steel with powder coat black paint finish	
Power Cord	16,4ft / 5mt	



CONTROL PANEL

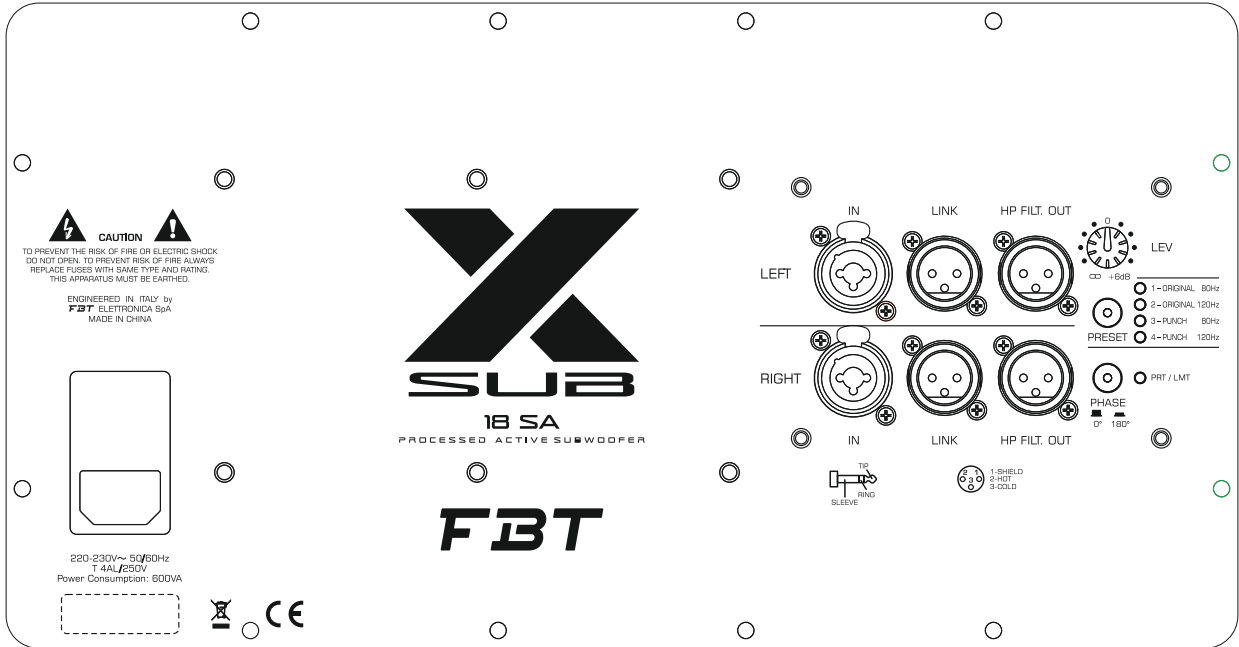

DIMENSIONAL DRAWINGS

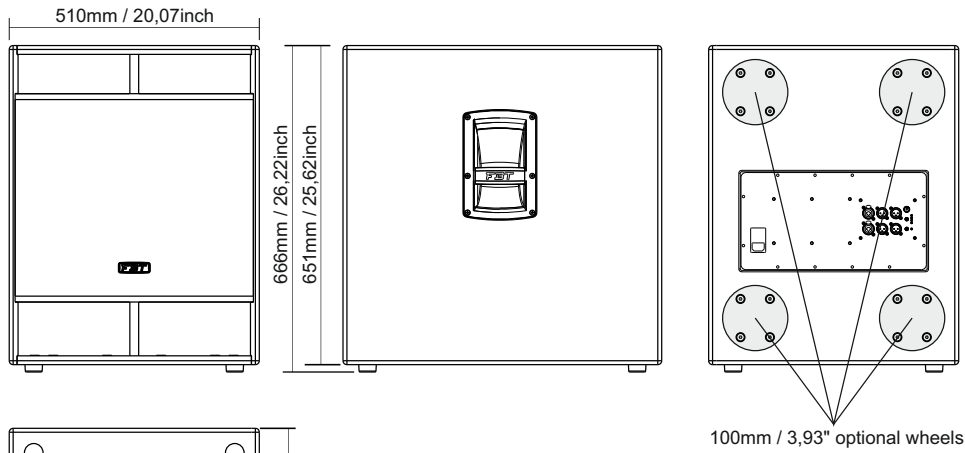

FREQUENCY RESPONSE

