

SC 450 - large diaphragm studio condenser microphone




UK



- ✓ Includes shockmount and plastic case
- ✓ External low-cut and -10 db pad switch

Caution!

- ▶ Never remove the screen holding the capsule, as this may damage the microphone!
- ▶ Never drop the mic, as this may cause severe damage!
- ▶ When the microphone is not in use, take it out of its clamp and put it in its case. Clean with damp cloth only.

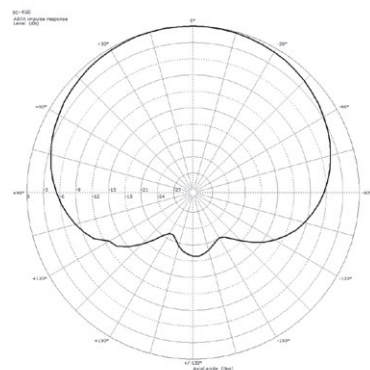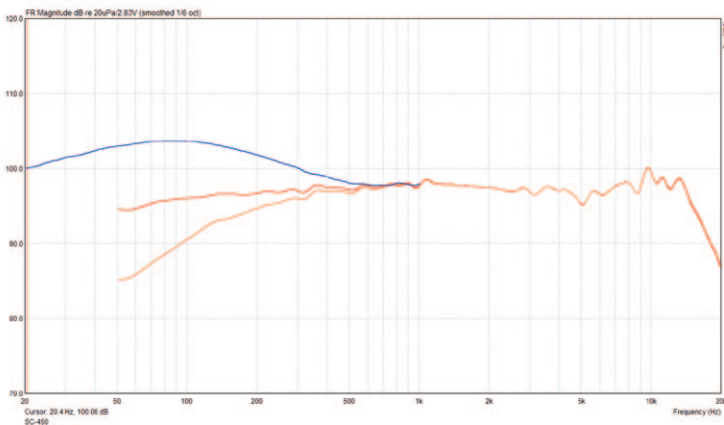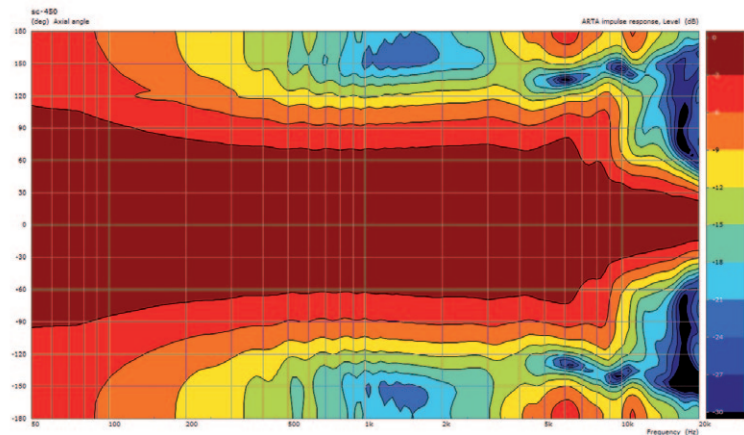

Polar pattern @ 1 kHz

Connection / Supply	XLR / P48
Transducer concept	condenser
Directivity	cardioid
Field sensitivity [mV/ Pa]	23.3
Field sensitivity [dB re 1V/ Pa]	-32.7
Equivalent noise level [dB(A)]	10.3
Signal-to-noise ratio [dB(A)]	83.7
Maximum SPL [dB SPL @ 1% THD]	126
Electric impedance [ohm @ 1 kHz]	200
Current draw [mA]	2.9
Frequency response 0.1 m -10 dB	20 - 18.000 Hz

Musikhaus Thomann e. K.
 Treppendorf 30 • 96138 Burgebrach
 Germany • www.thomann.de

