



Der G Sub 1501 ist ein universeller 15" Hochleistungssubwoofer in besonders flacher Bauweise. Mit 60 x 60 cm Grundmaß kann er kippstabil auch grössere HiMid-Systeme im Stangenbetrieb aufnehmen und mit nur 40 cm Höhe leicht in bestehende Bühnenkonstruktionen integriert werden. Er überzeugt durch sein gutes Handling, sein tiefes und sattes Bassfundament sowie durch sein modernes Design.

PRODUCT SPECIFICATIONS

Speaker Components	15" Neodym - VC = 100 mm
Description	Bass Extension
Powerhandling AES / Peak	1000 Watt / 3000 Watt
Impedance nominal	8 Ω
SPL 1m 1 Watt / Peak	97 dB / 131 dB
Usable Range	35 Hz - 220 Hz
Tuning Frequency Excursion minimum	42 Hz
Connectors	2 x Neutrik Speakon 4-pole Coding: 1 +/- HiMid, 2 +/- Sub Incl. switcher for active / passive operation
Handles	2 x 2D handle
Fittings	M20 on top Wheelboard fittings
Weight	26,0 kg
Size height x width x depth	40,0 x 60,0 x 60,0 cm
Order No.	00620



Fittings für Rollenwagen und robustes Wabenlochgitter.




M20 Flansch auf der Oberseite.



Anschlussfeld.

DIMENSIONS

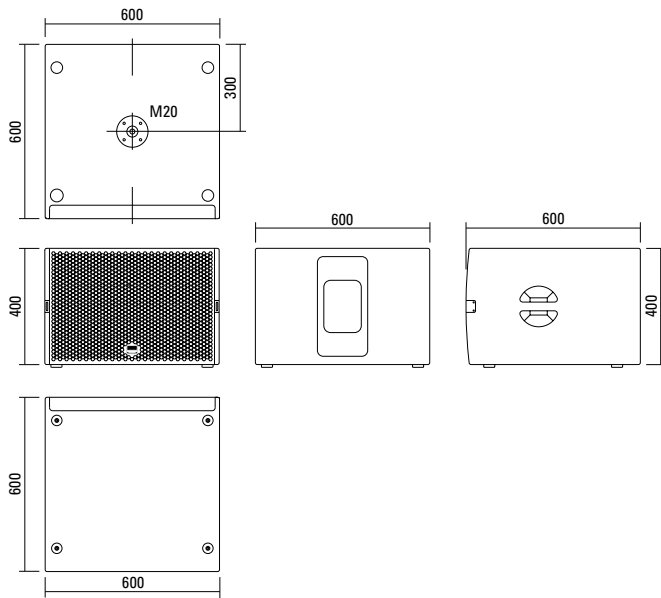


Controller Setups finden Sie unter:


www.seeburg.net/html/downloads_dt.html

MEASUREMENTS

Frequency Response

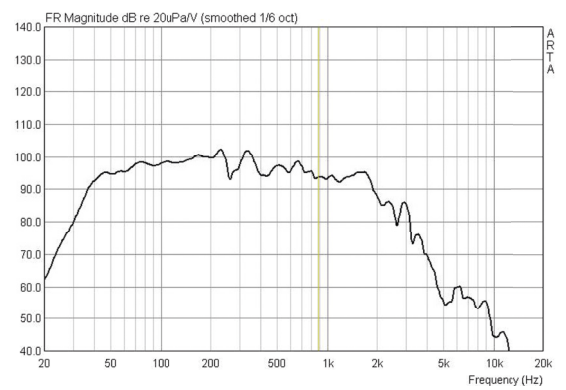


Impedance

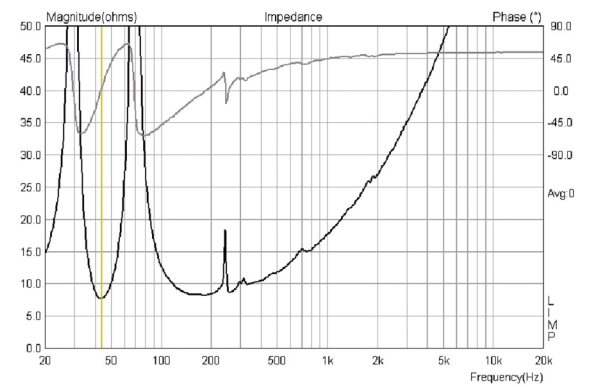

APPLICATIONS




G Sub 1501 / GL 24

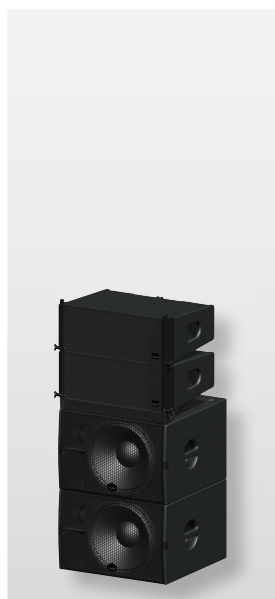

2 x G Sub 1501 / 2 x Galeo



G Sub 1501 / TSM 12

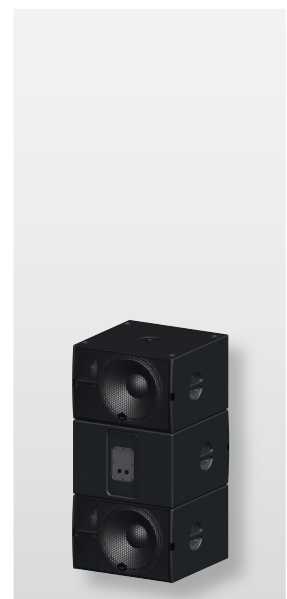

2 x G Sub 1501 dp / G Sub 1501
Cardioid-Anordnung

ACCESSORIES G Sub 1501

Speaker Pole

M20, adjustable, K&M
Order No. **03022**



Speaker Pole

M20, with crank, K&M
Order No. **03023**



Tilt Unit

with grid plate (30 kg max.)
Order No. **01282**



Cover

for G Sub 1501
without wheelboard
Order No. **01239**



Cover

for G Sub 1501
by using wheelboard
Order No. **01239/WB**



Wheelboard

for G Sub 1501, stackable
Order No. **01267**

