



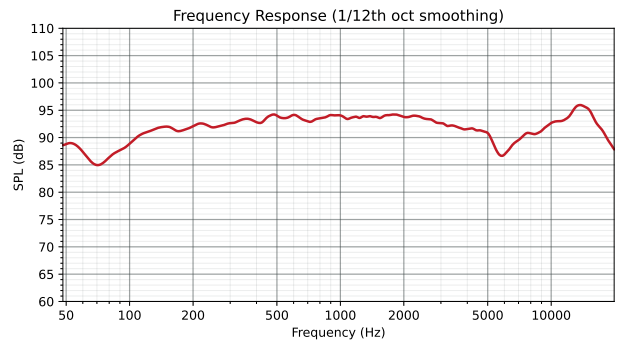

- Studio Microphone with Large Diaphragm
- 1-inch gold membrane
- Internal low-cut switch at 100 Hz with 6 db
- Polar pattern: Supercardioid
- Including shock mount and bag

Caution!


- Never remove the screen of the microphone!
This action could damage the sensitive microphone capsule.
- Prevent the microphone from falling down, as this can cause serious damage!
- After every use, remove the microphone from the holder and place it in its transport packaging.
- Use only a slightly moist cloth for cleaning.

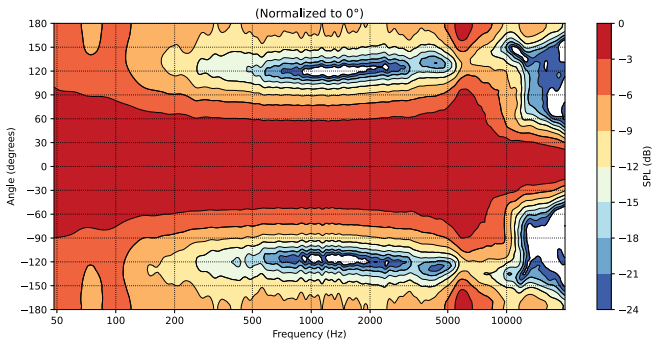

Technical specifications


- Connection/power supply
- Transducer principle
- Polar pattern
- Sensitivity @1 kHz (mVrms/Pa)
- Sensitivity @1 kHz (dBV/Pa)
- Equivalent input noise (dB SPL)
- Signal-to-noise ratio @1 kHz, 94 dB SPL (dB)
- Max. sound pressure level (dB SPL @ 1% THD, 1 kHz)
- Impedance [Ohm @1 kHz]
- Frequency range (-10 dB)
- Current consumption (mA)
- Dimensions (Ø × H), with shock mount
- Thread
- Weight
- Ambient conditions

XLR/P48
 Condenser
 Supercardioid
 35.5
 -29
 11.8
 82.2
 132
 120
 50 - 20,000 Hz
 3.7
 44 mm × 150 mm
 5/8 inch with 3/8 inch adapter
 351 g (microphone), 200 g (shock mount)
 Temperature range 0 °C...40 °C
 Relative humidity 20%...80% (non-condensing)

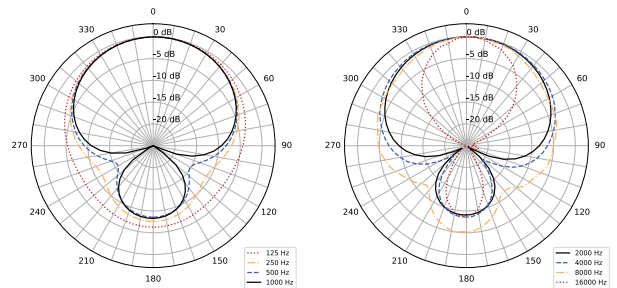

 Discover the entire t.bone range on our website: tbone.audio

 Visit us on Instagram and discover the full audio experience: [tbone.audio/instagram](https://www.instagram.com/tbone.audio/)


 Visit our YouTube channel for product videos and interesting stories: [tbone.audio/youtube](https://www.youtube.com/tbone.audio/)

General information

This document contains important information. Read and follow the instructions. Keep the document for future reference. If you pass the product on to others, please include this document. Contents are subject to change. Please refer to the latest version of the documentation, which is ready for download under www.thomann.de.

Intended use

This product is designed to convert acoustic signals into electrical signals. Any other use is considered to be improper and could result in personal injury or property damage. No liability will be assumed for damage resulting from improper use. This device may be used only by persons with sufficient physical, sensory, and intellectual abilities and having corresponding knowledge and experience. Other persons may use this device only if they are supervised or instructed by a person who is responsible for their safety.

 **Risk of injury and choking hazard for children!**
 Children can suffocate on packaging material and small parts. Children can injure themselves when handling the product. Never allow children to play with the packaging material and the product. Always store packaging material out of the reach of babies and small children. Always dispose of packaging material properly when it is not in use. Never allow children to use the product without supervision. Keep small parts away from children and make sure that the product does not shed any small parts that children could play with.



Environmentally friendly materials have been chosen for the packaging. These materials can be sent for normal recycling. Ensure that plastic bags, packaging, etc. are disposed of in the proper manner. Do not just dispose of these materials with your normal household waste, but make sure that they are collected for recycling. Please follow the instructions and markings on the packaging.



This product is subject to the European Waste Electrical and Electronic Equipment Directive (WEEE) as amended. Do not dispose of your old device with your normal household waste. Dispose of the product through an approved waste disposal firm or through your local waste management facility. When disposing of the device, comply with the rules and regulations that apply in your country. If in doubt, consult your local waste management facility.