


Millenium

Pocket Mix



Connection example:

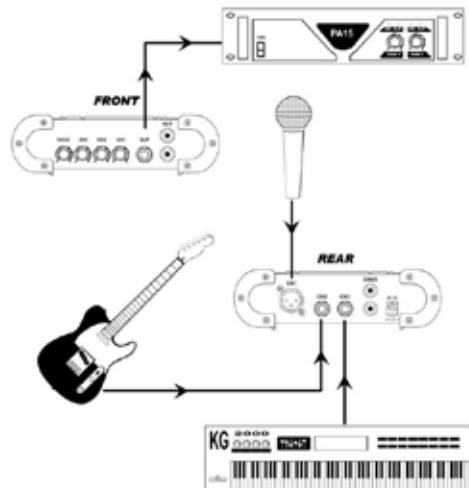

Ensure that plastic bags, packaging, etc. are disposed of properly and are not within reach of babies and young children. Choking hazard!



For the transport and protective packaging, environmentally friendly materials have been chosen that can be supplied to normal recycling. Ensure that plastic bags, packaging, etc. are properly disposed of. Do not just dispose of these materials with your normal household waste, but make sure that they are fed to a recovery. Please follow the notes and markings on the packaging.

- 5-channel mixer
- Frequency range: 10 Hz ... 95 kHz
- Inputs:
 - 1 × XLR, balanced, mono
 - 2 × 1/4", high ohmic, unbalanced, mono
 - 1 × RCA, unbalanced, stereo
- Outputs:
 - 2 × RCA, unbalanced, mono
 - 1 × 1/4", unbalanced
- Separate volume control for channels 1, 2, 3 and channel pair 4/5
- Input impedance: 1 M Ω , Output impedance: 100 Ω
- Maximum input level: +15 dBu
- THD+N: <0.005, noise level: -105 dBu
- Robust metal housing with rubber feet for safe stand
- Voltage supply via 20 V power adapter provided
- Dimensions (W × H × L): 150 mm × 40 mm × 100 mm
- Weight: 0.4 kg