

SQ-5

Supported SLink Port Connections

Firmware V1.2.0

**SQ-5
+AR84**



— dSnake Cat5e or higher

Total Input Sources: **31**
 Total Output Sockets: **18**
 Local Input Sources
 Mic/Line: **16 + 1**
 Line: **6**
 Remote Inputs
 Mic/Line: **8**
 Local Output Sockets
 XLR + TRS: **12 + 2**
 Remote Output Sockets
 XLR: **4**

**SQ-5
+AB168**



ME PERSONAL MIXING SYSTEM

— dSnake Cat5e or higher

Total Input Sources: **39**
 Total Output Sockets: **22**
 Local Input Sources
 Mic/Line: **16 + 1**
 Line: **6**
 Remote Inputs
 Mic/Line: **16**
 Local Output Sockets
 XLR + TRS: **12 + 2**
 Remote Output Sockets
 XLR: **8**
 + ME connection

**SQ-5
+AR2412**



ME PERSONAL MIXING SYSTEM

— dSnake Cat5e or higher — ME Cat5e or higher

Total Input Sources: **47**
 Total Output Sockets: **26**
 Local Input Sources
 Mic/Line: **16 + 1**
 Line: **6**
 Remote Inputs
 Mic/Line: **24**
 Local Output Sockets
 XLR + TRS: **12 + 2**
 Remote Output Sockets
 XLR: **12**
 + ME connection


**SQ-5
+AB168
+AR84**



— dSnake Cat5e or higher

Total Input Sources: **47**
 Total Output Sockets: **26**
 Local Input Sources
 Mic/Line: **16 + 1**
 Line: **6**
 Remote Inputs
 Mic/Line: **24**
 Local Output Sockets
 XLR + TRS: **12 + 2**
 Remote Output Sockets
 XLR: **12**

**SQ-5
+AB168
+AB168**

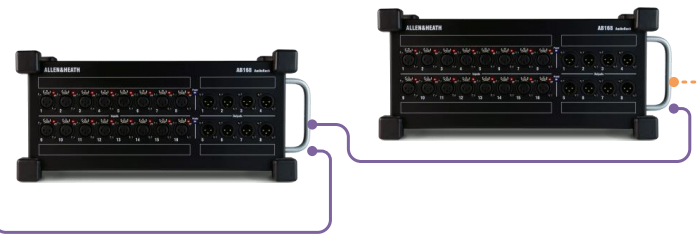

ME PERSONAL MIXING SYSTEM

dSnake Cat5e or higher

Total Input Sources: **55**
 Total Output Sockets: **30**
 Local Input Sources
 Mic/Line: **16 + 1**
 Line: **6**
 Remote Inputs
 Mic/Line: **32**
 Local Output Sockets
 XLR + TRS: **12 + 2**
 Remote Output Sockets
 XLR: **16**
 + ME connection

**SQ-5
+AR2412
+AB168**




ME PERSONAL MIXING SYSTEM

dSnake Cat5e or higher

Total Input Sources: **63**
 Total Output Sockets: **34**
 Local Input Sources
 Mic/Line: **16 + 1**
 Line: **6**
 Remote Inputs
 Mic/Line: **40**
 Local Output Sockets
 XLR + TRS: **12 + 2**
 Remote Output Sockets
 XLR: **20**
 + ME connection

**SQ-5
+ ME**

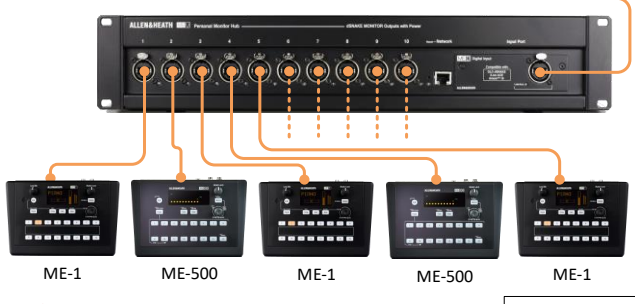


ME-U provides PoE to power ME-1 and ME-500 units

dSnake Cat5e or higher

Total Input Sources: **23**
 Total Output Sockets: **14**
 Local Input Sources
 Mic/Line: **16 + 1**
 Line: **6**
 Local Output Sockets
 XLR + TRS: **12 + 2**
 Channels to ME: **40**

**SQ-5
+ ME**

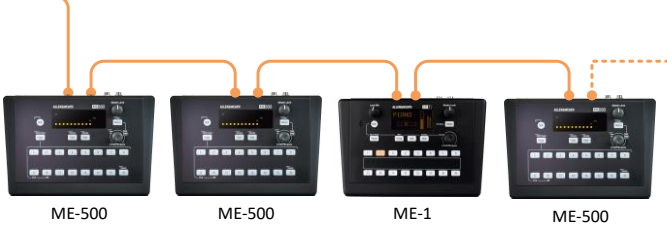

ME-1 and ME-500 units must be powered separately

dSnake Cat5e or higher

Total Input Sources: **23**
 Total Output Sockets: **14**
 Local Input Sources
 Mic/Line: **16 + 1**
 Line: **6**
 Local Output Sockets
 XLR + TRS: **12 + 2**
 Channels to ME: **40**

SQ-5
+ **DX168**
(96kHz)



—●— DX Cat5e or higher

Total Input Sources: **39**
Total Output Sockets: **22**
Local Input Sources
Mic/Line: **16 + 1**
Line: **6**
Remote Inputs
Mic/Line: **16**
Local Output Sockets
XLR + TRS: **12 + 2**
Remote Output Sockets
XLR: **8**

SQ-5
+ **DX168**
+ **DX168**
(96kHz)



ⓘ Use cascade mode for the first DX168 in the chain

—●— DX Cat5e or higher

Total Input Sources: **55**
Total Output Sockets: **30**
Local Input Sources
Mic/Line: **16 + 1**
Line: **6**
Remote Inputs
Mic/Line: **32**
Local Output Sockets
XLR + TRS: **12 + 2**
Remote Output Sockets
XLR: **16**

SQ-5
+ **DX Hub**
+ **3 x DX168**
(96kHz)




ⓘ Up to 2 DX168s can be connected to each port using cascade mode

—●— gigaACE Cat5e or higher
—●— DX Cat5e or higher

Total Input Sources: **71**
Total Output Sockets: **38**
Local Input Sources
Mic/Line: **16 + 1**
Line: **6**
Remote Inputs
Mic/Line: **48**
Local Output Sockets
XLR + TRS: **12 + 2**
Remote Output Sockets
XLR: **24**

SQ-5
+ **DX Hub**
+ **8 x DX168**
(96kHz)

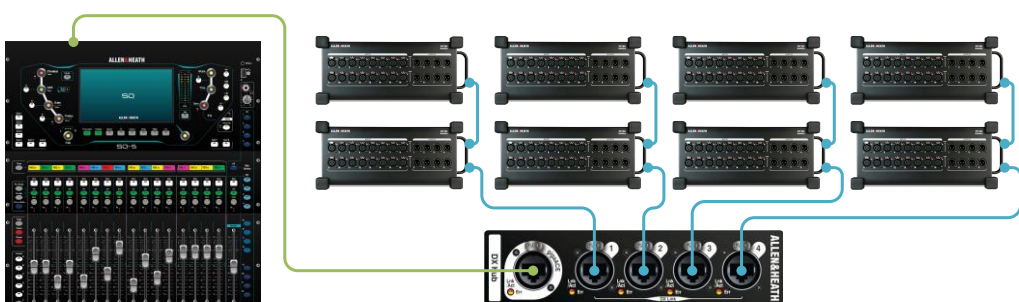


ⓘ Up to 2 DX168s can be connected to each port using cascade mode

—●— gigaACE Cat5e or higher
—●— DX Cat5e or higher

Total Input Sources: **151**
Total Output Sockets: **78**
Local Input Sources
Mic/Line: **16 + 1**
Line: **6**
Remote Inputs
Mic/Line: **128**
Local Output Sockets
XLR + TRS: **12 + 2**
Remote Output Sockets
XLR: **64**

**SQ-5
+ Qu**

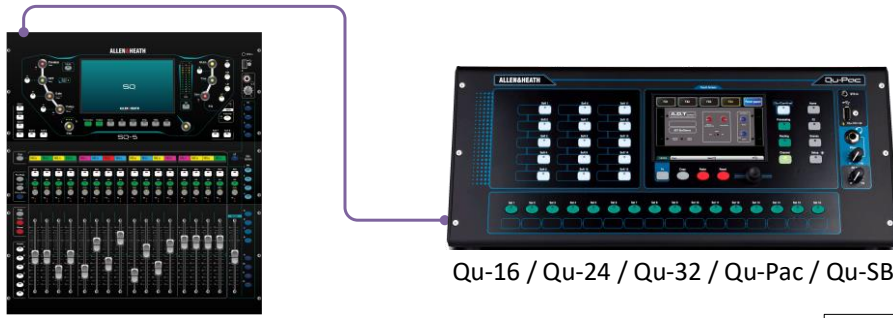

dSnake Cat5e or higher

Total Input Sources: **83**
 Total Outputs: **54**
 Local Input Sources
 Mic/Line: **16 + 1**
 Line: **6**
 Remote Inputs
 dSnake: **60**
 Local Output Sockets
 XLR + TRS: **12 + 2**
 Remote Outputs
 dSnake: **40**


**SQ-5
+ SQ
(96kHz)**



GigaACE Cat5e or higher

Total Input Sources: **151**
 Total Outputs: **142**
 Local Input Sources
 Mic/Line: **16 + 1**
 Line: **6**
 Remote Inputs
 GigaACE: **128**
 Local Output Sockets
 XLR + TRS: **12 + 2**
 Remote Outputs
 GigaACE: **128**

**SQ-5
+ dLive
(96kHz)**

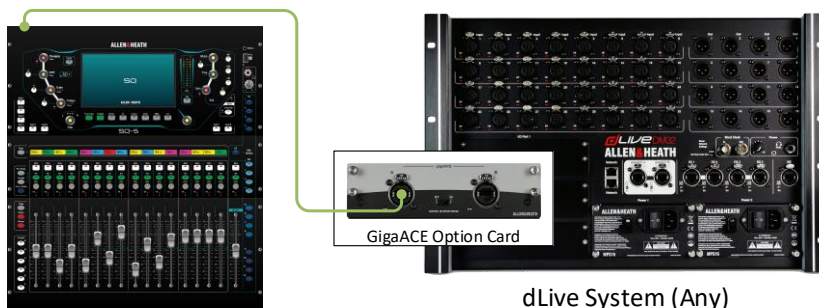

GigaACE Cat5e or higher

Total Input Sources: **151**
 Total Outputs: **142**
 Local Input Sources
 Mic/Line: **16 + 1**
 Line: **6**
 Remote Inputs
 GigaACE: **128**
 Local Output Sockets
 XLR + TRS: **12 + 2**
 Remote Outputs
 GigaACE: **128**