

HDL 20-A Micro Stacked System

System Configuration

DESCRIPTION

Micro Stacked System to cover an area of 15 (L) x 10 (W) m with a stage of 6 (W) m.
The module is pole-mount using the light-bar. Direct Sound Pressure level target is 100dB in the range of 400-4000Hz.

SYSTEM SPECIFICATION

1 nos. modules of HDL20A per side on a pole mount
Suggested Crossover Frequency 80Hz

List of Equipment


QUANTITY	MODEL	DESCRIPTION	PART NUMBER
2	HDL 20-A	active line array module	13040007 (230V) 13040008 (115V)
2	HDL 18-AS	active flyable high power subwoofer	13040009 (230V) 13040010 (115V)
2	FLY BAR HDL 20 LIGHT	suspending bar for HDL20-A line array system	13360229
2	AC PMX	speaker pole mount with pushbutton system	13360232
4	XLR CONNECTOR	audio connection cable between the boxes	-

Recommended Accessories

QUANTITY	MODEL	DESCRIPTION	PART NUMBER
4	AC RAIN COVER HDL20-18	rain cover for HDL 20-A and HDL 18-AS amplifiers	13360228

HDL 20-A Micro Stacked System

System Configuration

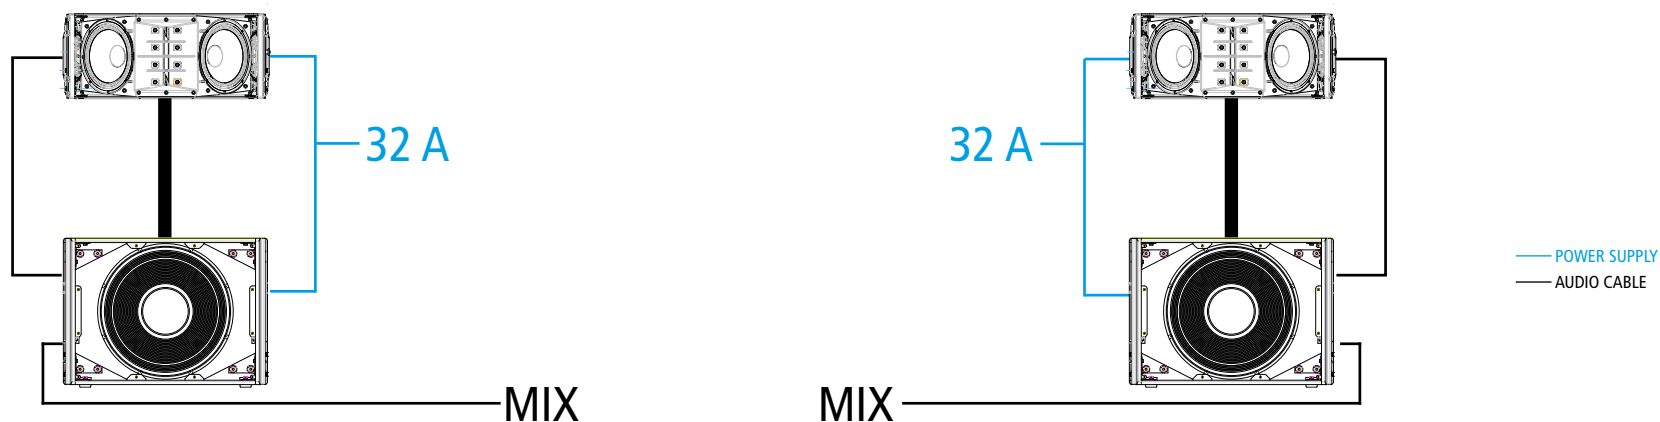

For its array systems, RCF has developed a dedicated configuration tool "RCF Shape Designer" that allows you to simply get all necessary mechanical and digital-processing set-up data (http://www.rcf.it/en_US/products/touring-and-theatre/rcf-shape-designer).

RCF makes also available on its website all the speaker system data in "GLL" format for predicting the performance of loudspeaker systems in a suggested acoustical environment by using the several AFMG software tools (www.AFMG.eu).

RCF Engineering Support Group is at your disposal for any information and clarification you might require techsupport.pro@rcf.it

