




Der K Sub 1801 ist ein kompakter Hochleistungs-Subwoofer für universelle Anwendungen im nutzbaren Frequenzbereich von 33 Hz - 180 Hz. Das klassische Bassreflexkonzept mit einem besonders strömungsgünstigen Kanal gewährleistet eine ungewöhnlich präzise und tiefreichende Basswiedergabe bei mittlerer Reichweite. Insgesamt vier ergonomische Schalen- und Eckgriffe sorgen für ein ideales Handling. Für den Transport kann auf der Vorderseite ein Rollenwagen montiert werden.

## PRODUCT SPECIFICATIONS

Speaker Components	18"
Description	Passive Bass Extension
Power <small>AES/ Peak</small>	1500 W / 4500 W
Impedance <small>nominal</small>	8 Ω
SPL <small>1 W / Peak @ 1 m</small>	101 dB / 137 dB
Usable Range <small>- 6 dB</small>	33 Hz - 180 Hz
Tuning Frequency <small>excursion minimum</small>	38 Hz
Connectors	2 x Neutrik Speakon NL4MP in/out Coding: 1+/- loop thru, 2+/- Sub
Handles	4 x
Rigging / Fittings	M20 on top and side Wheelboard fittings
Weight	42,5 kg (+7,0 kg wheelboard)
Size <small>height x width x depth</small>	69,8 x 51,2 x 56,0 cm
Order No.	01060



Zwei große Schalenriffe seitlich ermöglichen ein einfaches Handling.

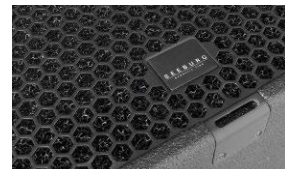


Robustes Wabenlochgitter für starke Beanspruchung.




Praktische Eckziehgriffe.

## DIMENSIONS

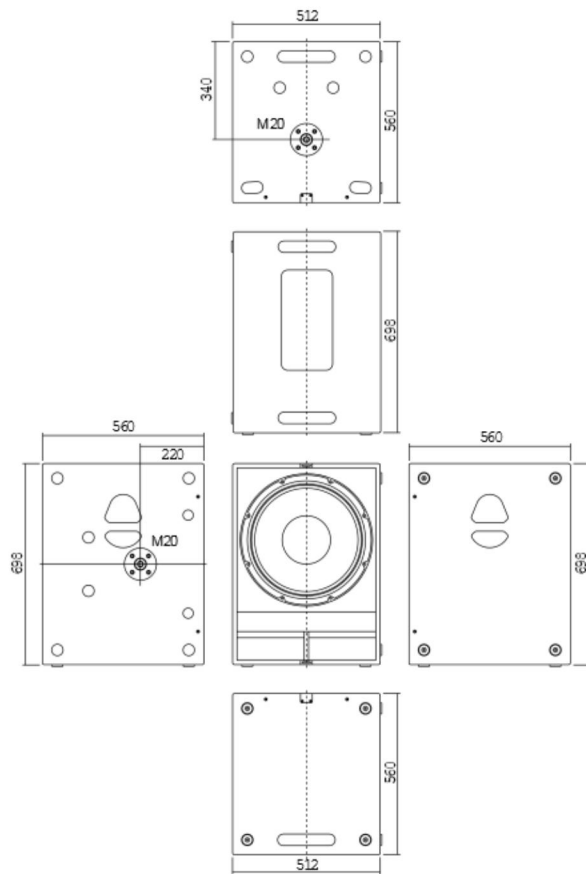


## MEASUREMENT

### Frequency Response with Presets

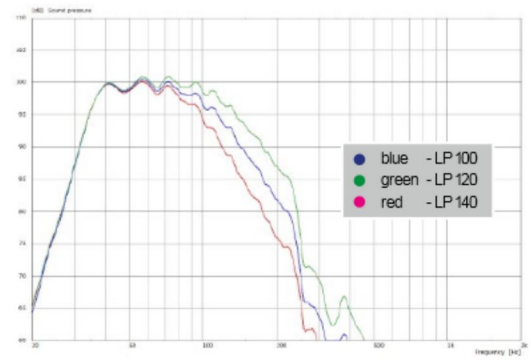

### Sensitivity 1W @1m + Impedance

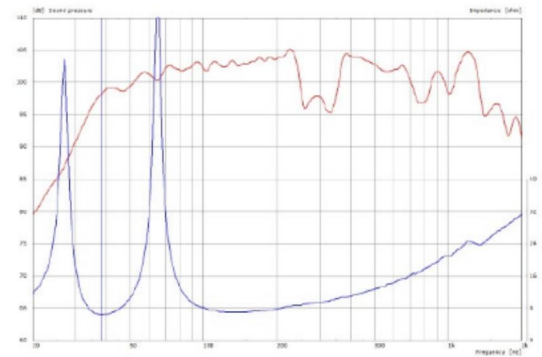

Controller Setups | finden Sie unter:

<http://www.seeburg.net/Controller-Setups>


## APPLICATIONS



2 x KSub 1801 / K24



KSub 1801 / G 24

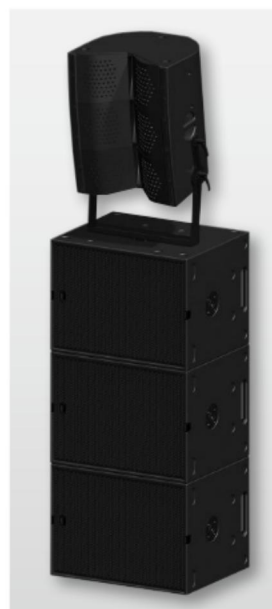

2 x KSub 1801 / G3



3 x KSub 1801 dp  
Cardiod-Anordnung

## ACCESSORIES K Sub 1801

### Speaker Pole

M20, with wind up, K&M

Order No. 03023



M20, adjustable, K&M

Order No. 03022



### Feet

ABS foot, 38 x 14 mm, black

Order No. 07608



Rubber foot, 38 x 10 mm, black

Order No. 07602



### Ground-Stacking Board

for K Sub 1801 / G Sub / TSE Sub  
with extendable legs

Order No. 01394



### Wheelboard

for G Sub / K Sub 1801,  
stackable, 7 kg

Order No. 01260



### Cover

for K Sub 1801 with wheelboard

Order No. 01257



### Hybrid Cable System

PowerCon-PowerCon / XLR-XLR

5 m Order No. 08464

10 m Order No. 08466

15 m Order No. 08468



Stackable Wheelboard.



Abnehmbares Rollenbrett.

